


HOMELITE®

ELECTRIC CHAIN SAW

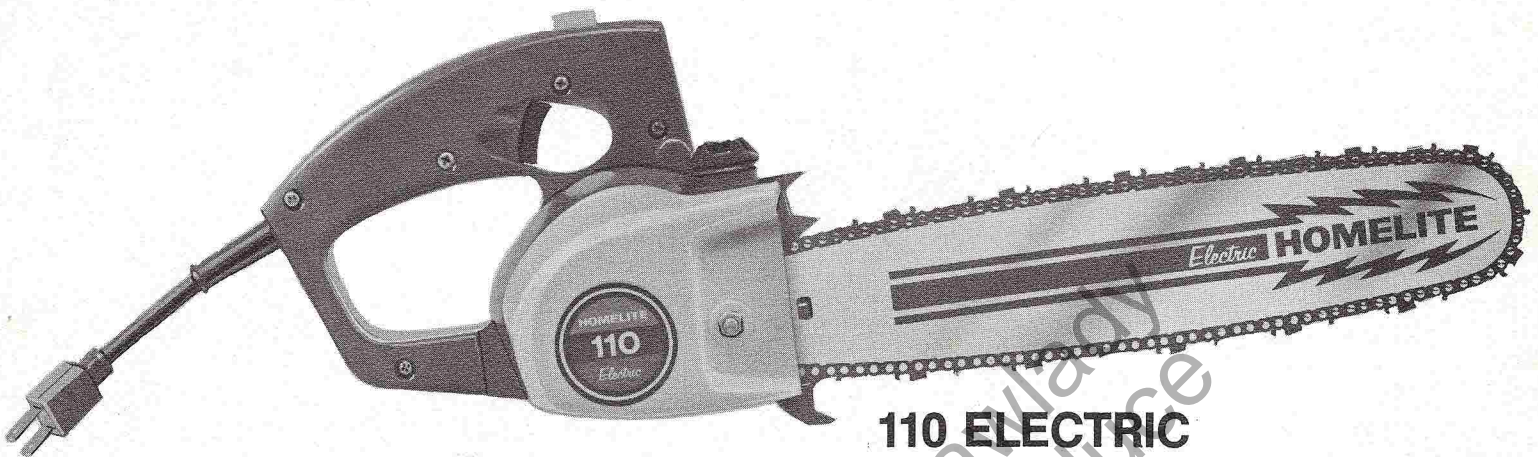

110 ELECTRIC

SPECIFICATIONS

MOTOR

Universal 115 Volts A.C. only, 25 to 60 cycles, 12 amps at 120 volts—Burn out protected. Double insulated. U.L. listed.

Current Load: 12 amps at 120 volts.

Motor Cord: 6"—2 wire (no ground)

CHAIN AND GUIDE BAR

Guide Bar: Homelite 12" "Perma Hard" tip.

Chain: Homelite #25 series, 0.050" gauge

Sprocket: 8-tooth, star-type, 1/4" pitch

Drive links in 12" loop: 69

Chain Speed: (No load) 2500 feet/minute

Cutting Capacity: 12"

Chain Oiling: Manual push button chain oiling.

Oil Reservoir: Capacity 5.6 oz.

CLUTCH

Automatic clutch prevents motor stalling under excessive load.

GENERAL

Weight: 9½ lbs. with 12" bar and chain.

Handle Bars: Black vinyl coated handle bar. Rear grip with isolated trigger for convenient trigger control and push button chain oiling. All large clearances for gloved hands.

Bucking Spike: Integrally cast bucking spike for maximum strength.

Cord Clip: Cord clip prevents saw cord and extension cord separation.

FEATURES

Instant starting • Quiet • No gas and oil to mix • Can be used indoors and outdoors • Lightweight • Powerful • Handy

Electric Extension Cord Requirements:

Length of Cord in Feet	25	50	100	150	200
Gauge of Cord	16	16	14	12	10

HOMELITE®

A **textron** DIVISION

Port Chester, N.Y., U.S.A. 10573
(914) 939-3400