


HOMELITE

DIRECT DRIVE CHAIN SAW

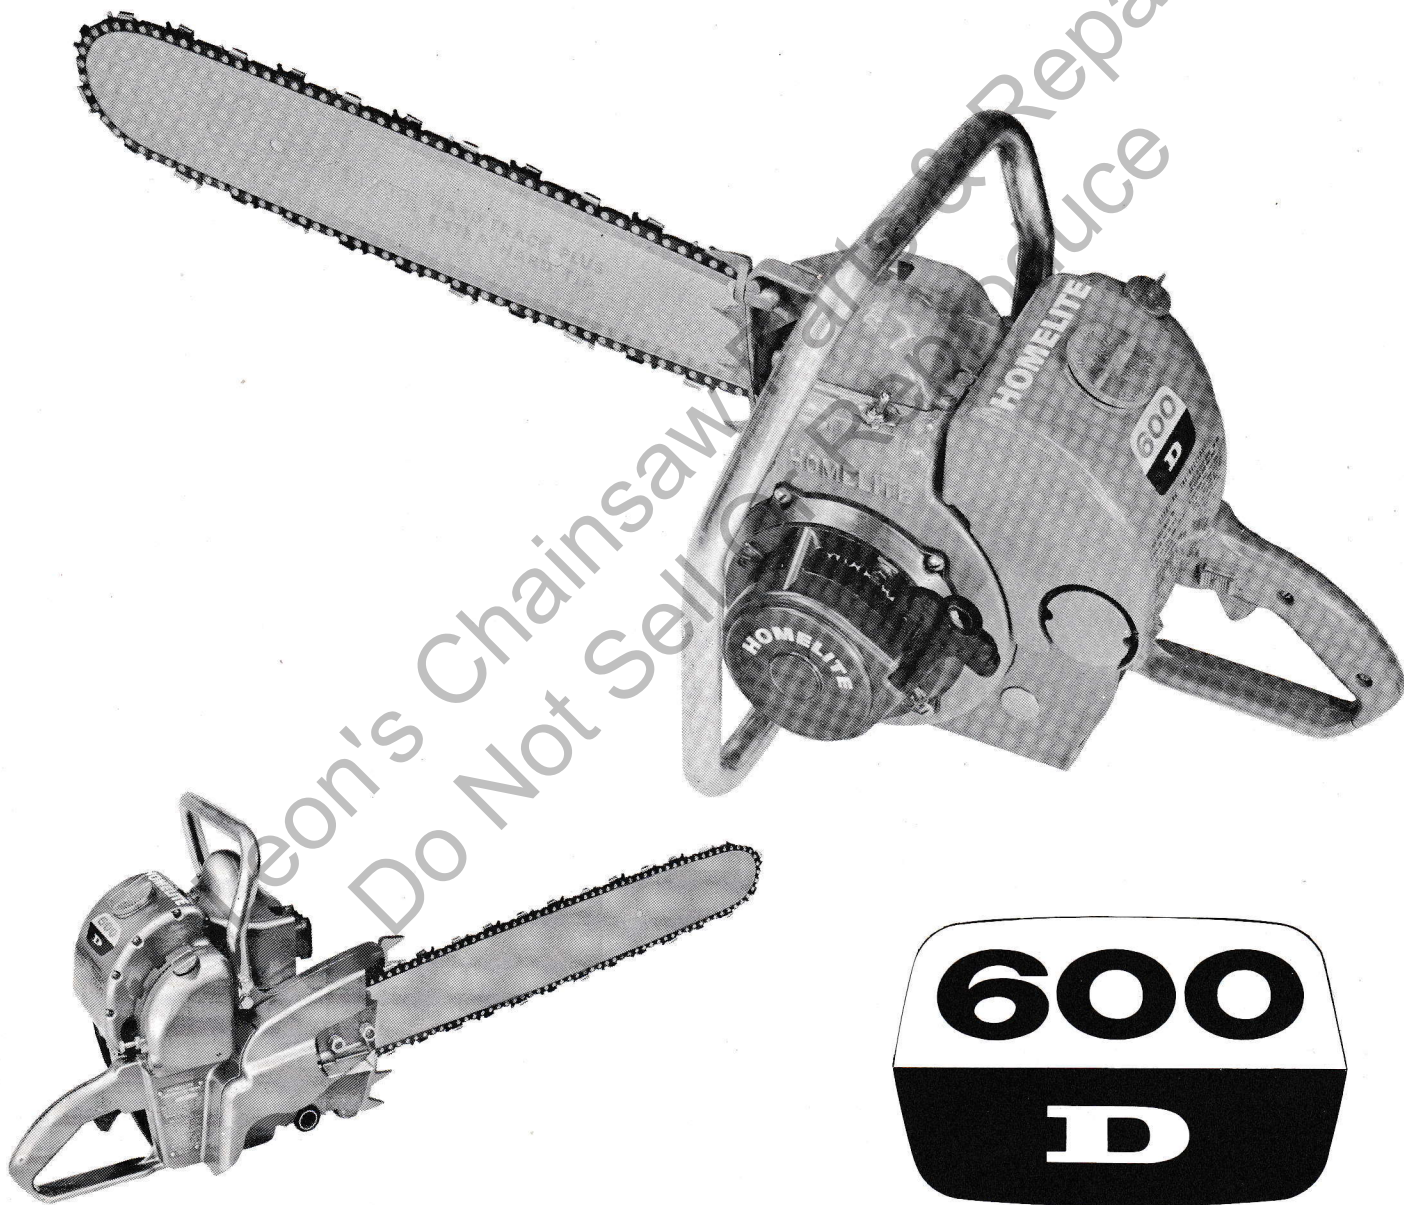

HOMELITE
A DIVISION OF TEXTRON INC.
PORT CHESTER, NEW YORK, U.S.A.

MECHANICAL FEATURES OF THE NEW 600D CHAIN SAW

New "Plastisol" ends on air filter for better sealing and filtering.

New, stronger, longer-wearing clutch spider made of powdered steel.

Saw equipped with new long-flange chain guide plates to direct chain into groove . . . even on longer bars.

Saw equipped with a new fuel cap relief valve which can be installed without screws. It is much easier to replace and eliminates troubles resulting from improper installation.

GENERAL SPECIFICATIONS OF THE NEW 600D

Bore	2 $\frac{1}{16}$ "
Stroke	1 $\frac{1}{2}$ "
Displacement	5.01
Maximum Engine RPM . . .	6000-7000 under load
Type Reed	Pyramid
Fuel Tank Capacity	45 Ounces
Oil Tank Capacity	13 Ounces
Type Sprocket	$\frac{7}{16}$ " pitch, 7 tooth
Chain Speed f.p.m.	3062 under load
Weight	Dry, less bar and chain 18 lbs., 7 ounces

HOMELITE

A DIVISION OF TEXTRON INC.

PORT CHESTER, NEW YORK