


# HOMELITE

**DIRECT DRIVE CHAIN SAW**

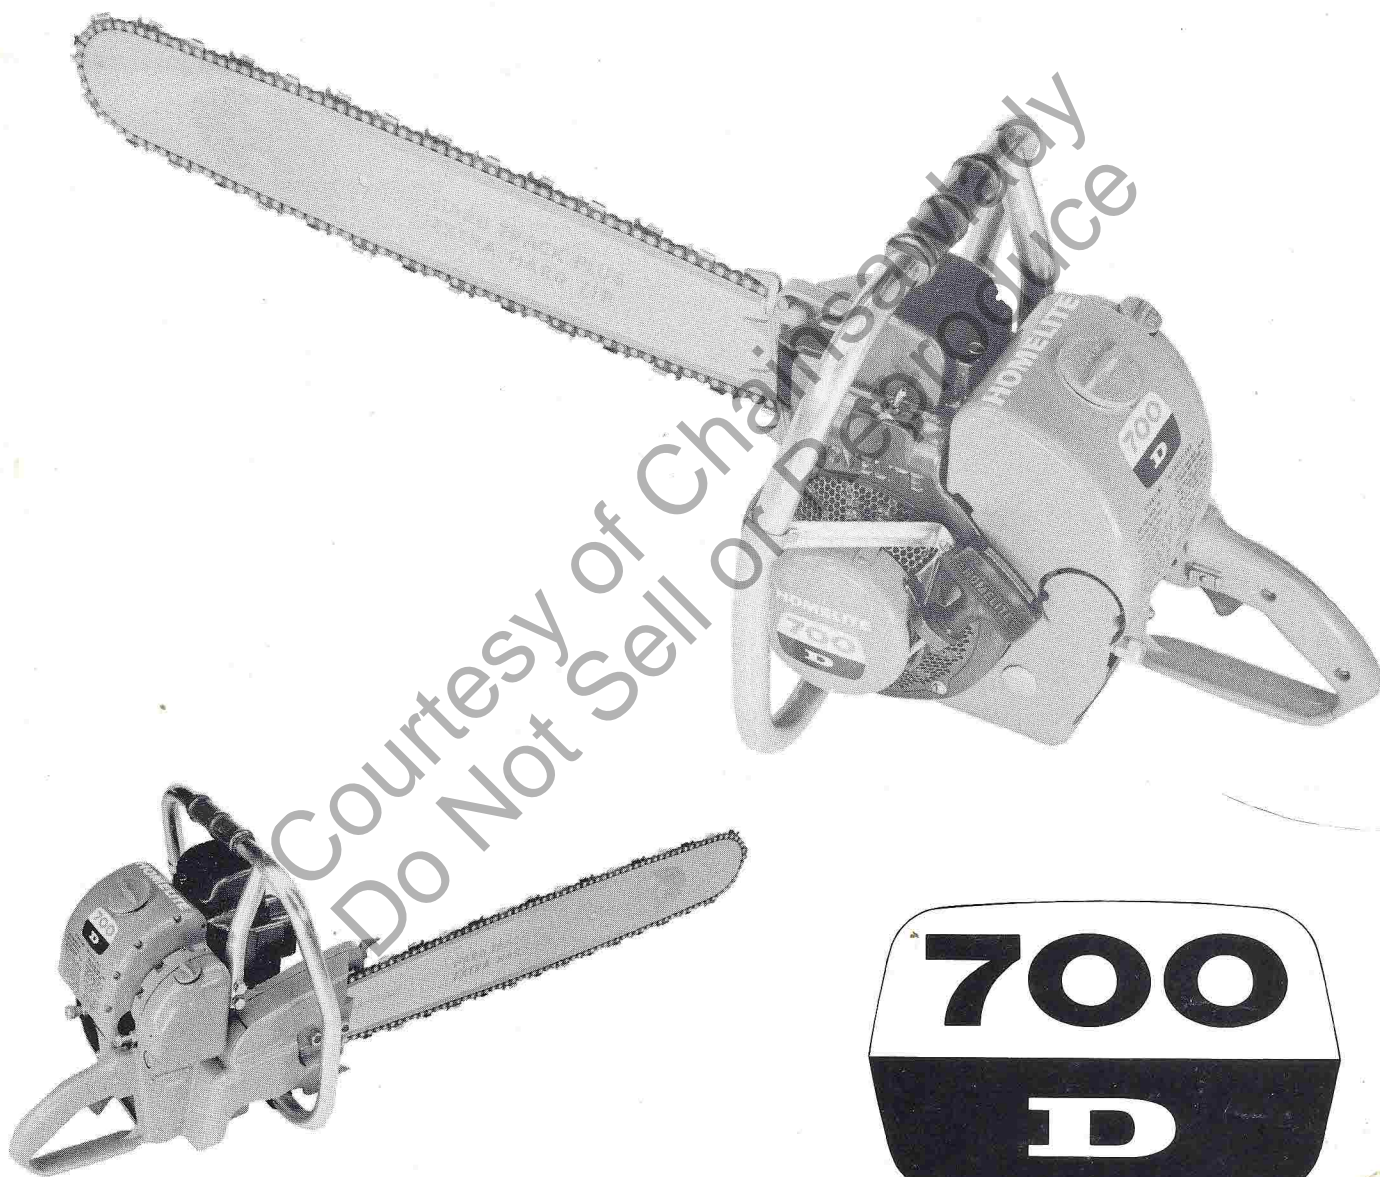

**700**  
**D**

**HOMELITE**

A DIVISION OF TEXTRON INC.  
PORT CHESTER, NEW YORK, U.S.A.



## MECHANICAL FEATURES OF THE NEW 700D CHAIN SAW

New, larger cylinder shield.

New "Plastisol" ends on Skinner air filter for better sealing and filtering

New, husky dowel pin anchors starter pulley to hub...and takes thrust when starting.

Ball drive assembly equipped with sealing cap to restrict debris from entering ball drive pockets. Tests indicate this assembly can operate ten times longer without cleaning.

New, stronger, longer-wearing clutch spider made of powdered steel.

Saw will be equipped with new long-flange chain guide plates to direct chain into groove...even on longer bars.

Saw will be equipped with a new fuel cap relief valve which can be installed without screws. It is much easier to replace and eliminates troubles resulting from improper installation.

### GENERAL SPECIFICATIONS OF 700D

Bore . . . . .	2 $\frac{3}{16}$ "
Stroke . . . . .	1 $\frac{1}{2}$ "
Displacement . . . . .	5.64
Fuel Tank Capacity . . . . .	45 Ounces
Oil Tank Capacity . . . . .	13 Ounces
Maximum Engine RPM . . . . .	No Load 7000, Load 6000
Type Sprocket . . . . .	$\frac{7}{16}$ " Pitch, 7 Tooth
Chain Speed f.p.m. . . . .	No Load 3573, Load 3062
Weight . . . . .	Dry-less bar and chain, 19 lbs., 3 oz.

# HOMELITE

A DIVISION OF TEXTRON INC.

PORT CHESTER, NEW YORK