


HOMELITE®

"C" Series Direct Drive Chain Saws
FINEST VALUE IN THE CHAIN SAW INDUSTRY!



- Rugged design proven by professional use
- Perfect combination of weight and power
- Extra large fuel and oil capacities

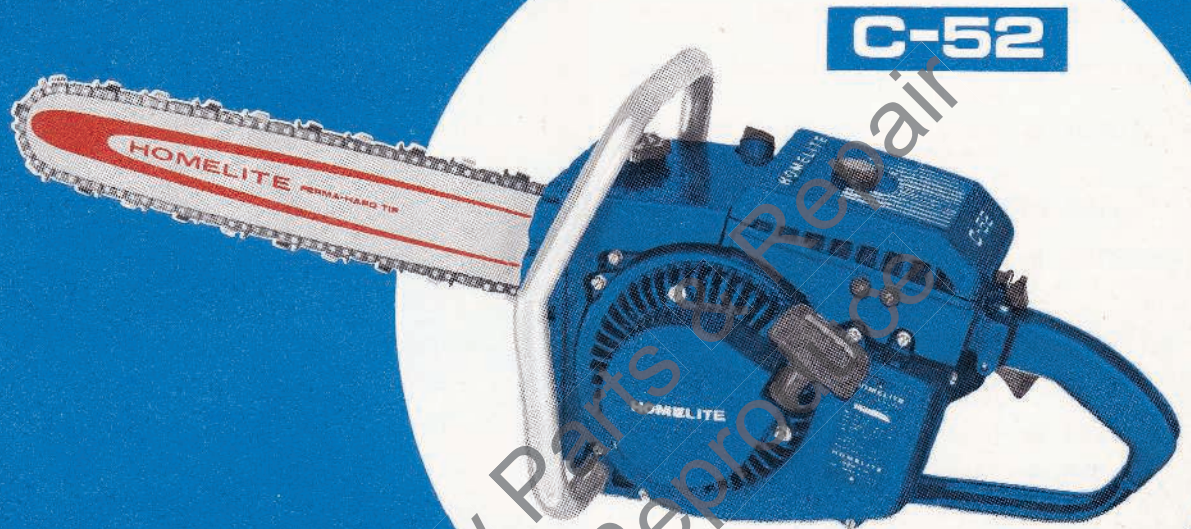

- The Professional's Choice
in a Heavy Duty, Inexpensive Saw.

HOMELITE®

GENERAL SPECIFICATIONS

ENGINE

- TYPE** ● Homelite, single cylinder; 2 cycle (loop scavenged).
- ENGINE SPEED** ● 6000 RPM, under load.
- BEARINGS** ● Heavy duty ball and anti-friction needle.
- STARTER** ● Positive engagement with automatic rewind.
- CLUTCH** ● Heavy duty centrifugal, 3000 RPM engaging speed.

FUEL SYSTEM

- CARBURETOR** ● Tillotson, all position diaphragm with integral fuel pump and strainer. External adjustment.
- INTAKE VALVE** ● Flat reed.
- FUEL PICK-UP** ● Flexible fuel pick-up with replaceable filter.
- AIR FILTER** ● Micro mesh fiber with integral gasket.
- THROTTLE CONTROL** ● Trigger in handle with safety starting trigger latch.
- FUEL MIXTURE** ● With each gallon of regular gas mix ½ pint Homelite oil or SAE 30 oil (16:1).

IGNITION SYSTEM


- BREAKER POINT SETTING** ● .015".
- LOCATION** ● Protected in sealed box under rotor.
- SPARK PLUG TYPE AND GAP** ● Champion J6J, .025" gap.

GUIDE BAR, CHAIN AND SPROCKET

- GUIDE BAR** ● 14", 18", 22", 28".
- CHAIN** ● 72D Oregon ⅜" pitch.
- CHAIN SPEED** ● 2625 feet per minute with 7 tooth sprocket.
- SPROCKET** ● 7 tooth, ⅜" pitch.

GENERAL

- HANDLE BARS** ● Flush cut or wrap around (plastic grip on C-72 only).
- ATTACHMENTS** ● Bow, clearing and utility guides.

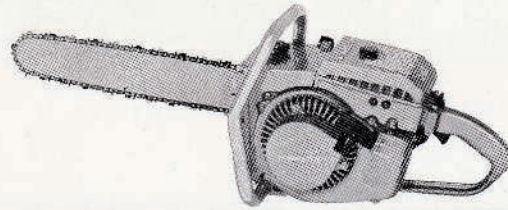

MODEL C-52

ENGINE

- DRY WEIGHT** ● 18 pounds (less bar and chain).
- DISPLACEMENT** ● 4.7 cubic inch.
- STROKE** ● 1½".
- BORE** ● 2".
- OILER TYPE** ● Positive manual.
- OILER CAPACITY** ● 8 oz.
- MUFFLER** ● Stack type with directional louvers.

FUEL AND IGNITION

- FUEL CAPACITY** ● 42 oz.
- MAGNETO** ● High tension, moisture and dust proof with protected coil.



MODEL C-72

ENGINE

- DRY WEIGHT** ● 19 pounds (less bar and chain).
- DISPLACEMENT** ● 4.9 cubic inch.
- STROKE** ● 1⅞".
- BORE** ● 2".
- OILER TYPE** ● Positive manual.
- OILER CAPACITY** ● 8 oz.
- MUFFLER** ● Spark arresting, baffled, quiet type.

FUEL AND IGNITION

- FUEL CAPACITY** ● 42 oz.
- MAGNETO** ● High tension, moisture and dust proof with protected coil.

HOMELITE®

A **Textron**
DIVISION

PORT CHESTER, N.Y. U.S.A.

DEALER