


HOMELITE

**SUPER
XL-15**

**GEAR
DRIVE**

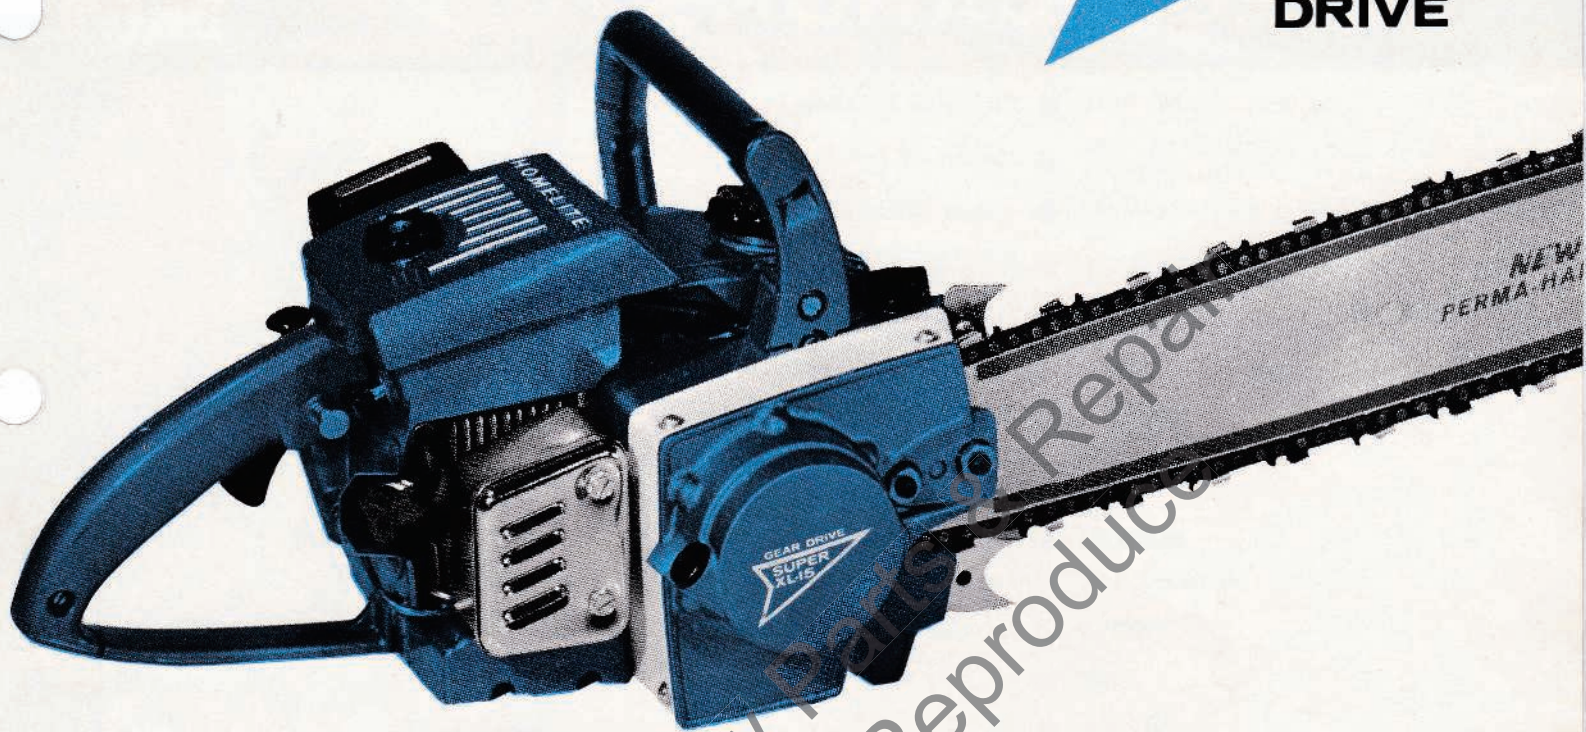

SUPER LIGHT SAW FOR PROFESSIONALS



**30% FASTER CUTTING
LARGER OIL CAPACITY
35% LARGER FUEL TANK**


LIGHTEST GEAR DRIVE CHAIN SAW WITH BIG TREE POWER

HOMELITE

SPECIFICATIONS



- WEIGHT, ENGINE ONLY ● 15 Pounds 12 Ounces
- CHAIN OILER TYPE AND CAPACITY ● Manual, 4.8 Reservoir w/Filter
- DRY FUEL TANK CAPACITY ● 23.6 oz. w/Replaceable Auto. Vent
- MAGNETO ● High Tension, Moisture and Dust Proof
- SPARK PLUG TYPE AND GAP ● Champion TJ-6-J, .025 Gap
- THROTTLE CONTROL ● Trigger in Handle w/Throttle Lock
- BEARINGS ● Anti Friction Needle and Ball
- CARBURETOR ● Tillotson All-Position Diaphragm w/ Integral Fuel Pump and Strainer. External Adjustments.
- MUFFLER ● Quiet Type, w/ Baffled Spark Arrester
- INTAKE VALVE ● Pyramid 4 Reed
- ENGINE ● Homelite 2 Cycle (Loop Scavenged)
- BORE ● 1 $\frac{3}{8}$ "
- STROKE ● 1 $\frac{3}{8}$ "
- DISPLACEMENT ● 3.55 Cubic Inch
- COMPRESSION RATIO ● 8:1
- IGNITION TIMING ● 30° BTDC
- BREAKER POINT SETTING AND LOCATION ● .015" Protected in Sealed Box under Rotor
- ENGINE SPEED ● 6000 RPM under Load
- CHAIN SPEED ● 1.031 Ft. per Min. under Load
- CLUTCH ENGAGING SPEED AND TYPE ● 2600 RPM, 6 Shoe, Double Spring Centrifugal
- FUEL AND MIXTURE ● Regular Gas With $\frac{1}{2}$ Pint (16:1) Homelite or SAE 30 MS Oil per Gallon
- BAR SIZES ● 12", 16", 20", and 24"
- ATTACHMENTS ● Utility and Clearing Bars, 14" Plunge-Cut Bow
- CHAIN ● $\frac{3}{8}$ " Pitch #72 Oregon Chipper
- SPROCKET ● 8T, $\frac{3}{8}$ " Pitch with Needle Bearing
- FUEL FILTERS ● Felt Pick-Up in Fuel Tank, Wire Mesh Screen in Carburetor
- AIR FILTER ● Micro Mesh Fiber
- HANDLE BAR TYPE ● Flush Cut
- GEAR RATIO ● 2.91 to 1

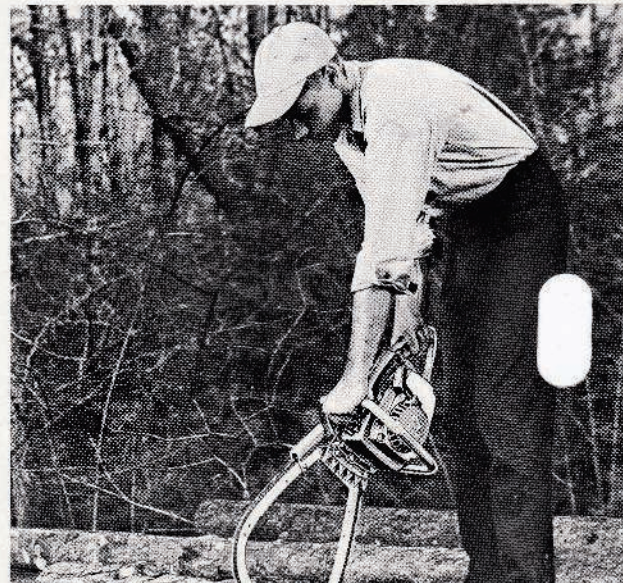

HOMELITE A **Textron** DIVISION PORT CHESTER, N.Y. U.S.A.