HOMELITE® DIRECT DRIVE CHAIN SAW

XL-12


MODEL XL 12

- Cuts 12" logs in 10 seconds.
- Fells trees up to 3 feet thick.
- Weighs only 12 lbs. 12 oz. less bar and chain.



MODEL SUPER XL AUTOMATIC

- Super Power for faster cutting.
- Automatic Oiling to insure adequate lubrication of bar and chain.
- Weighs only 13 lbs. 13 oz.

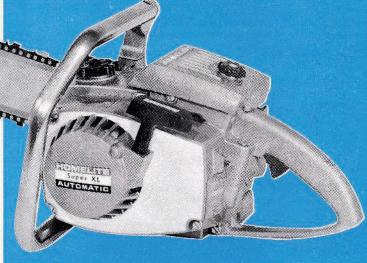



HOMELITE®

GENERAL SPECIFICATIONS

ENGINE

TYPE

Homelite 2 cycle (Loop Scavenged).

ENGINE SPEED 6000 RPM under load.

BEARINGS • Anti-friction needle and ball.

STARTER Positive engagement with automatic rewind

CLUTCH . Heavy duty centrifugal, 3000 RPM engaging speed.

FUEL SYSTEM

CARBURETOR • Tillotson all-position diaphragm.

FUEL PICK-UP Flexible fuel pick-up with replaceable filter.

AIR FILTER Micro-mesh fiber with integral gasket.

Trigger in handle with safety starting THROTTLE . CONTROL throttle lock.

FUEL AND With each gallon of regular gas mix 1/2 pint (16.1) Homelite oil or SAE 30 oil. MIXTURE

IGNITION SYSTEM

High tension, moisture and dust MAGNETO • proof.

BREAKER POINT .015". SETTING

> LOCATION Protected in sealed box under rotor.

30° BTDC static

GUIDE BAR, CHAIN AND SPROCKET

.050 gauge, induction hardened with welded, hard faced tip, sizes 11", 14" HT., 16", 20", 24" and 30".

CHAIN • 3/8" pitch #72 Oregon chipper.

CHAIN SPEED 2650 ft. per min. under load.

SPROCKET • 7 tooth, 3/8" pitch.

GENERAL

Utility and clearing bars, 14" plunge-ATTACHMENTS •

MODEL XL-12

ENGINE

DRY WEIGHT • 12 lbs., 12 oz.

DISPLACEMENT • 3.3 cubic inch.

STROKE 13/8".

> BORE . 13/4".

Single stainless steel reed valve. INTAKE VALVE

> Stack type with directional louvers. MUFFLER •

SPARK PLUG Champion CJ-8. .025" gap. TYPE AND GAP

STARTER Positive engagement with automatic rewind.

OILER TYPE Positive displacement, manual.

OILER CAPACITY 3 oz.

FUEL CAPACITY • 18 oz.

GENERAL

HANDLE BAR Polished aluminum flush cut.

MODEL SUPER XL-AUTOMATIC

ENGINE

DRY WEIGHT • 13 lbs., 12 oz.

DISPLACEMENT 3.55 cubic inch.

> STROKE 1%".

> > BORE 113/16".

INTAKE VALVE Pyramid, with 4 stainless steel reeds.

MUFFLER

Ultra quiet, with baffled spark arrester.

SPARK PLUG TYPE AND GAP

Champion CJ-6, .025" gap.

STARTER •

Positive engagement with automatic rewind.

OILER TYPE

Automatic, reservoir with filter (manual system optional at extra cost).

4.8 oz. OILER CAPACITY

FUEL CAPACITY • 23.6 oz.

GENERAL

HANDLE BAR Vinyl coated flush cut.

PORT CHESTER, N.Y. U.S.A.

WADLEIGH MARINE

BOATS & MARINE ACCESSORIES BOX 183 WINNISQUAM, N. H. TEL 524-3652

DEALER