

HOMELITE

SUPER XL




30% FASTER CUTTING

LARGER OIL CAPACITY

35% LARGER FUEL TANK



SUPER LIGHT SAW FOR PROFESSIONALS

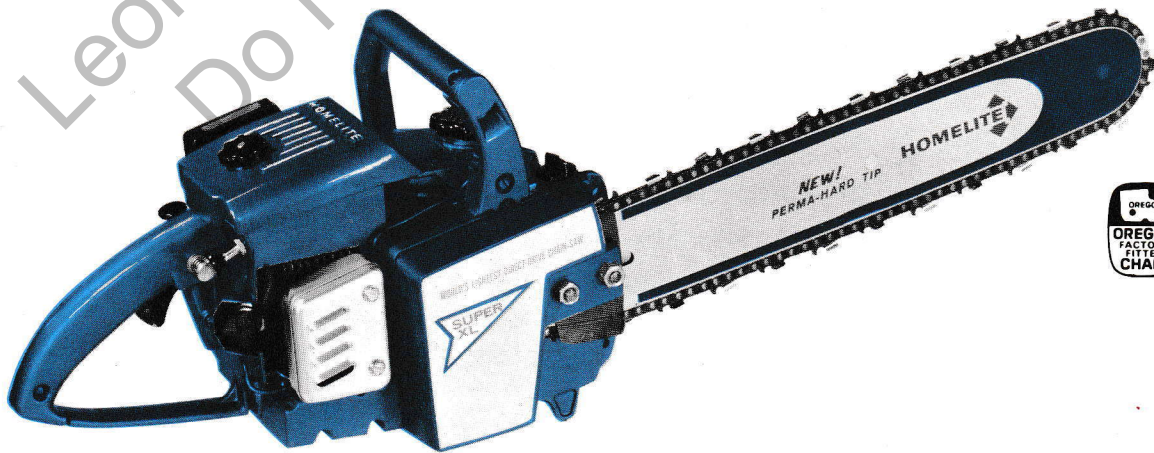

WORLD'S LIGHTEST DIRECT-DRIVE CHAIN SAW WITH SUPER POWER

HOMELITE

SPECIFICATIONS

**SUPER
XL**

- WEIGHT, LESS BAR AND CHAIN ● 13 Pounds 12 Ounces
- CHAIN OILER TYPE AND CAPACITY ● Manual, 4.8 oz Reservoir w/Filter
- DRY FUEL TANK CAPACITY ● 23.6 oz. w/Replaceable Auto. Vent
- MAGNETO ● High Tension, Moisture and Dust Proof
- SPARK PLUG TYPE AND GAP ● Champion TJ-8-J, .025 Gap
- THROTTLE CONTROL ● Trigger in Handle w/Throttle Lock
- BEARINGS ● Anti Friction Needle and Ball
- CARBURETOR ● Tillotson All-Position Diaphragm w/Integral Fuel Pump and Strainer
- MUFFLER ● Ultra Quiet, w/Baffled Spark Arrester
- INTAKE VALVE ● Pyramid Reed
- ENGINE ● Homelite 2 Cycle (Loop Scavenged)
- BORE ● 1 $\frac{3}{16}$ "
- STROKE ● 1 $\frac{3}{8}$ "
- DISPLACEMENT ● 3.55 Cubic Inch
- COMPRESSION RATIO ● 8:1
- IGNITION TIMING ● 30° BTDC Static
- BREAKER POINT SETTING AND LOCATION ● .015" Protected in Sealed Box under Rotor
- ENGINE SPEED ● 6000 RPM under Load
- CHAIN SPEED ● 2625 Ft. per Min. under Load
- CLUTCH ENGAGING SPEED AND TYPE ● 2600 RPM, 3 Shoe, Double Spring Centrifugal
- FUEL AND MIXTURE ● Regular Gas With $\frac{1}{2}$ Pint (16:1) Homelite or SAE 30 MS Oil per Gallon
- BAR SIZES ● 12", 16", 20", 24", 30" and 36"
- ATTACHMENTS ● Utility and Clearing Bars, 14" Plunge-Cut Bow
- CHAIN ● $\frac{3}{8}$ " Pitch #72 Oregon Chipper
- SPROCKET ● 7 Tooth, $\frac{3}{8}$ " Pitch
- FUEL FILTERS ● Felt Pick-Up in Fuel Tank, Wire Mesh Screen in Carburetor
- AIR FILTER ● Micro Mesh Fiber
- HANDLE BAR TYPE ● Flush Cut

HOMELITE A **textron** DIVISION PORT CHESTER, N.Y. U.S.A.

