


HOMELITE

GEAR DRIVE CHAIN SAW

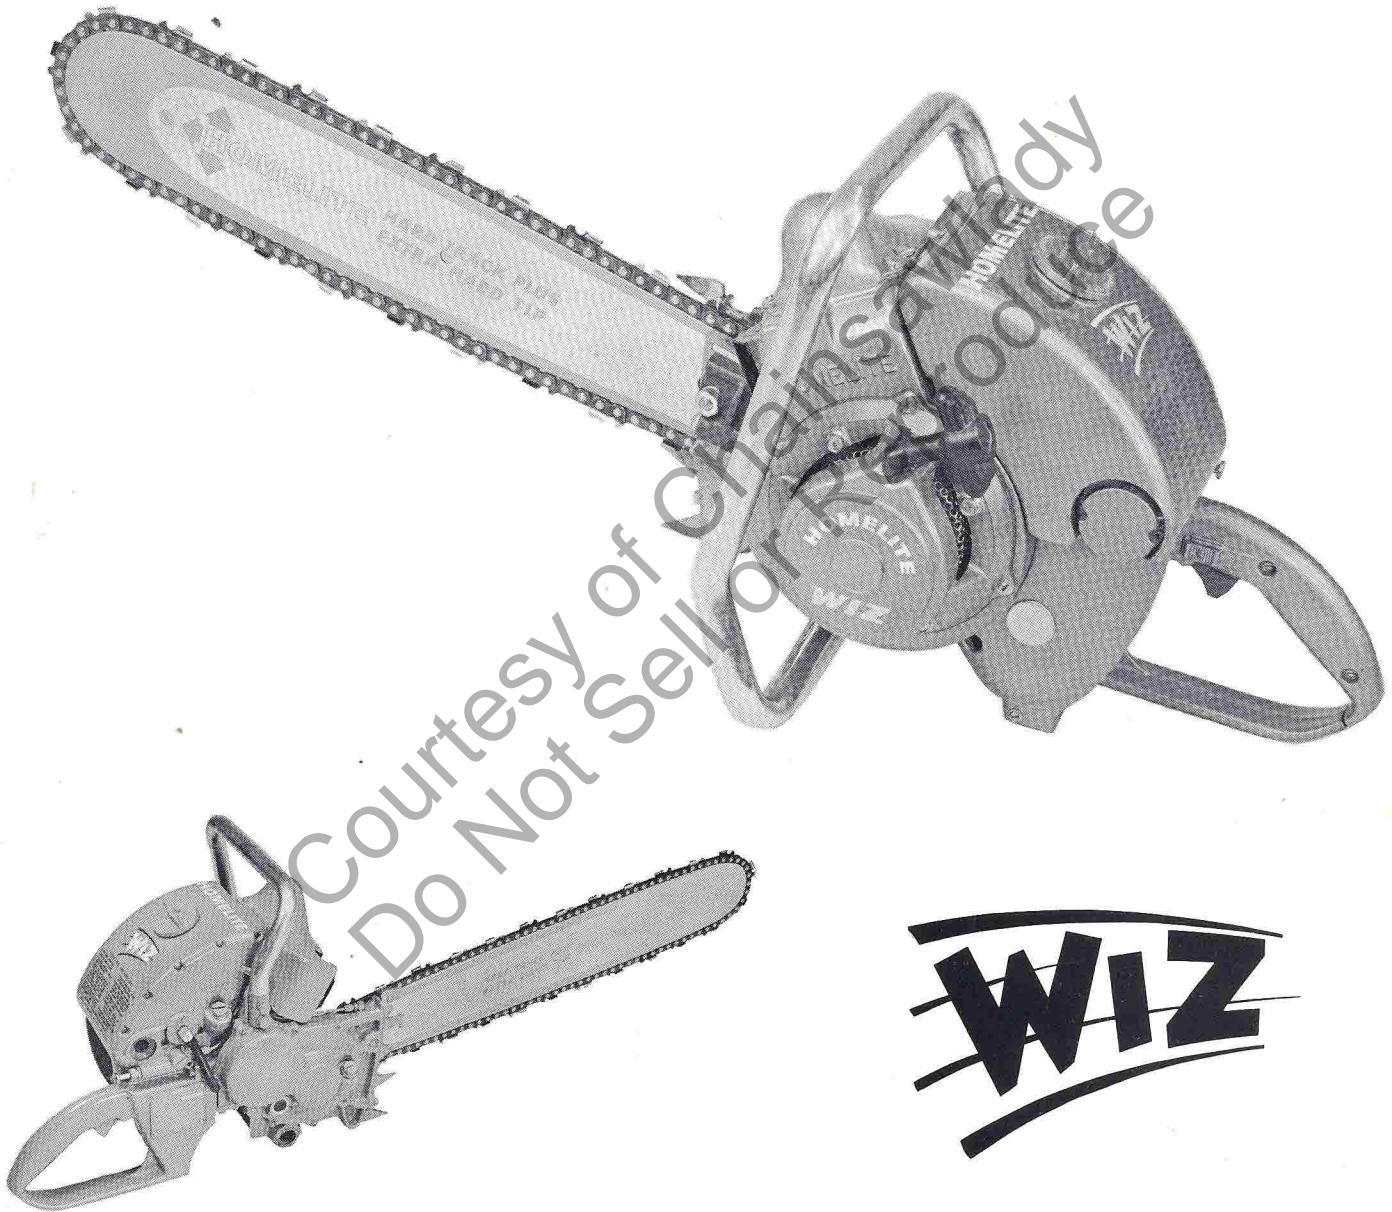

WIZ

HOMELITE

A DIVISION OF TEXTRON INC.
PORT CHESTER, NEW YORK, U.S.A.

MECHANICAL FEATURES OF THE WIZ SAW

Crankshaft journals on both magneto and clutch ends have been increased by $\frac{1}{16}$ ".

A new magneto rotor for bigger shaft.

The new Wiz has bigger backplate and fan housing for better cooling.

Saw has new steel, longer-wearing, clutch spider.

New, wider gears for better engagement. New powdered steel construction with much greater strength. Gear width now $\frac{7}{16}$ " instead of $\frac{3}{8}$ " formerly.

New sprocket shaft with double row, husky ball bearings.

New air filter design permits filter to register on the bore. Means more effective end-sealing; better engine breathing; longer engine life.

New long-flange chain guide plates to direct chain into guide bar groove.

GENERAL SPECIFICATIONS OF THE WIZ SAW

| | |
|------------------------------|---------------------------------|
| Bore | 2" |
| Stroke | $1\frac{3}{8}$ " |
| Displacement | 4.32 |
| Maximum Engine RPM | No Load 7000, Load 6000 |
| Type Reed | Flat Reed |
| Fuel Tank Capacity | 44 Ounces |
| Oil Tank Capacity | 5.14 Ounces |
| Type Sprocket | $\frac{1}{2}$ " pitch, 6 tooth |
| Chain Speed f.p.m. | No load 868, Load 826 |
| Weight | Dry, less bar and chain 20 lbs. |

HOMELITE

A DIVISION OF TEXTRON INC.

PORT CHESTER, NEW YORK