


# HOMELITE®

## XL-902 AM

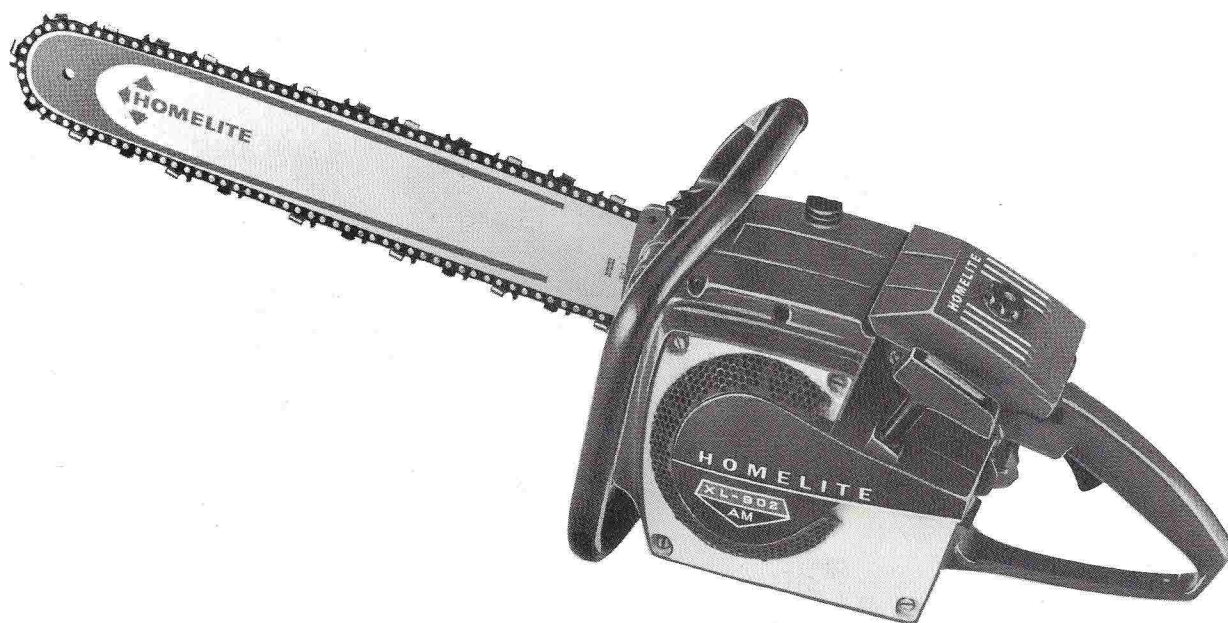

### WITH ALL THESE NEW FEATURES:

- **MORE POWER**
- **NEW** Positive Displacement Automatic Oiling with Manual Override
- **NEW** Full-Power Carburetor
- **NEW** External Screen
- **NEW** Improved Engine Lubrication at Peak R.P.M.
- **NEW** Cooler Running Cylinder
- **NEW** Reinforced Handle Bar
- **NEW** Rugged Lightweight Piston
- **NEW** Improved Engine Balance
- **NEW** Muffler
- **NEW** Stronger Clutch
- **NEW**-Retaining Chains for Gas and Oil Caps
- **NEW** Larger Oil Line
- **NEW** Connecting Rod for Longer Engine Life



# HOMELITE®

## XL-902 AM

### GENERAL SPECIFICATIONS

- |   |   |   |   |
|---|---|---|---|
| <b>BORE</b>                             | ● 2"  | <b>CHAIN OILER TYPE AND CAPACITY</b>        | ● Automatic with Manual Override 7 oz.  |
| <b>STROKE</b>                           | ● 1½"   | <b>WEIGHT LESS BAR &amp; CHAIN</b>          | ● 15½ lbs.  |
| <b>INTAKE VALVE</b>                     | ● Pyramid Reed                                      | <b>FUEL TANK CAPACITY</b>                   | ● 35 ozs.   |
| <b>ENGINE SPEED</b>                     | ● 6000 RPM Under Load                               | <b>BAR SIZES</b>                            | ● 11", 15", 19", 23", 29"   |
| <b>CLUTCH ENGAGING SPEED &amp; TYPE</b> | ● 2600 RPM, Heavy Duty Centrifugal                  | <b>HANDLE BAR TYPES</b>                     | ● Flush Cut   |
| <b>SPARK PLUG TYPE &amp; GAP</b>        | ● Champion CJ-6, .025"                              | <b>CARBURETOR</b>                           | ● Tillotson all position diaphragm with integral fuel pump and fuel strainer . . . external high and low, idle speed adjustment |
| <b>THROTTLE CONTROL</b>                 | ● Trigger in Handle with Throttle Lock              | <b>MAGNETO</b>                              | ● High tension moisture and dust proof  |
| <b>BEARINGS</b>                         | ● Heavy-duty Anti-Friction Roller and Ball Bearings | <b>FUEL FILTER</b>                          | ● Flexible fuel pick-up with replaceable filter   |
| <b>CHAIN TYPE</b>                       | ● ⅜" Pitch No. 72 Oregon Chipper                    | <b>BREAKER POINT SETTING &amp; LOCATION</b> | ● .015" — protected in sealed box under rotor   |
| <b>SPROCKET</b>                         | ● 7 Tooth, ⅜" Pitch                                 | <b>IGNITION TIMING</b>                      | ● 30° BTDC static   |
| <b>CHAIN SPEED UNDER LOAD</b>           | ● 2625 Feet per Minute                              |   |   |
| <b>FUEL MIX</b>                         | ● 16:1  |   |   |
| <b>MUFFLER</b>                          | ● Quiet Type with Baffled Spark Arrester            |   |   |

DEALER:

MANUFACTURED BY

**TERRY INDUSTRIES**

A DIVISION OF **Textron** CANADA LIMITED

180 LABROSSE AVE.

POINTE CLAIRE, QUE.