


HOMELITE

CHAIN SAW

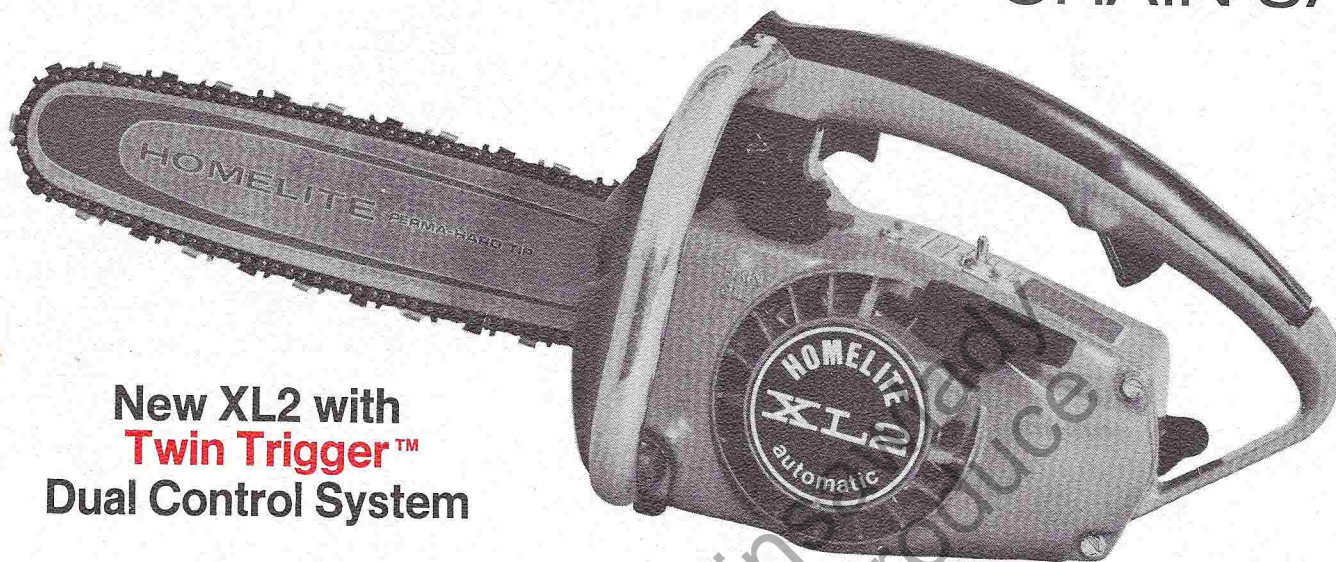

New XL2 with **Twin Trigger™** Dual Control System

SPECIFICATIONS

ENGINE

Type: 2-cycle, loop-scavenged with Power Boost® combustion chamber.

Dry Weight: 7 lb., 3 oz. (3,26 kg)

Displacement: 1.6 cu. in. (26,2 cc)

Bore and Stroke: 1-5/16" x 1-3/16"
(33,34 mm x 30,16 mm)

Cutting Speed: 8000 rpm

Idle Speed: 2900-3200 rpm

Bearings: Crankshaft, needle; connecting rod, aluminum and needle.

Connecting Rod: One piece, hardened steel.

Starter: Rewind, nylon rope, one piece pulley.

Clutch: One piece Centrifugal automatic.

Muffler: Softone™ diffuser type.

Throttle Control: Twin Trigger™ Dual Control System.

IGNITION

Ignition System: Conventional Breaker Point Magneto System.

Ignition Timing: 23° BTDC

Breaker Point Gap: .015" (0,38 mm)

Coil-to-Rotor Gap: .010"-.012"
(0,25 mm-0,30 mm)

Spark Plug: Champion DJ-7J **Spark Plug Gap:** .025" (0,64 mm)

CHAIN AND GUIDE BAR

Guide Bar: Homelite 12" guide bar with gas welded tip.

Chain: Homelite #25 Series. 1/4" pitch.

Chain Oil Capacity: 6.1 U.S. fl. oz., (180 cc)

Chain Oil System: Automatic positive displacement, piston pump. Pressurized tank.

Chain Oil Filter: Cleanable, sintered bronze in tank.

CARBURETION AND FUEL

Air Filter: Polyurethane sponge (replace when dirty).

Carburetor Type: HDC-15 w/fuel pump.

Intake Valving: Stainless steel reed valve into crankcase.

Fuel Tank Capacity: 8.45 U.S. fl. oz. (250 cc)

Fuel Filter: Sintered bronze in tank.

Continuous Operating Time per Filling: Up to 15 minutes.

GENERAL

Homelite exclusive, unique Twin Trigger™ dual control system. Two trigger positions to make wood cutting twice-as-easy.

HOMELITE

A **textron** DIVISION

Port Chester, N.Y., U.S.A. 10573
(914) 939-3400