


HOMELITE

DIRECT DRIVE CHAIN SAW

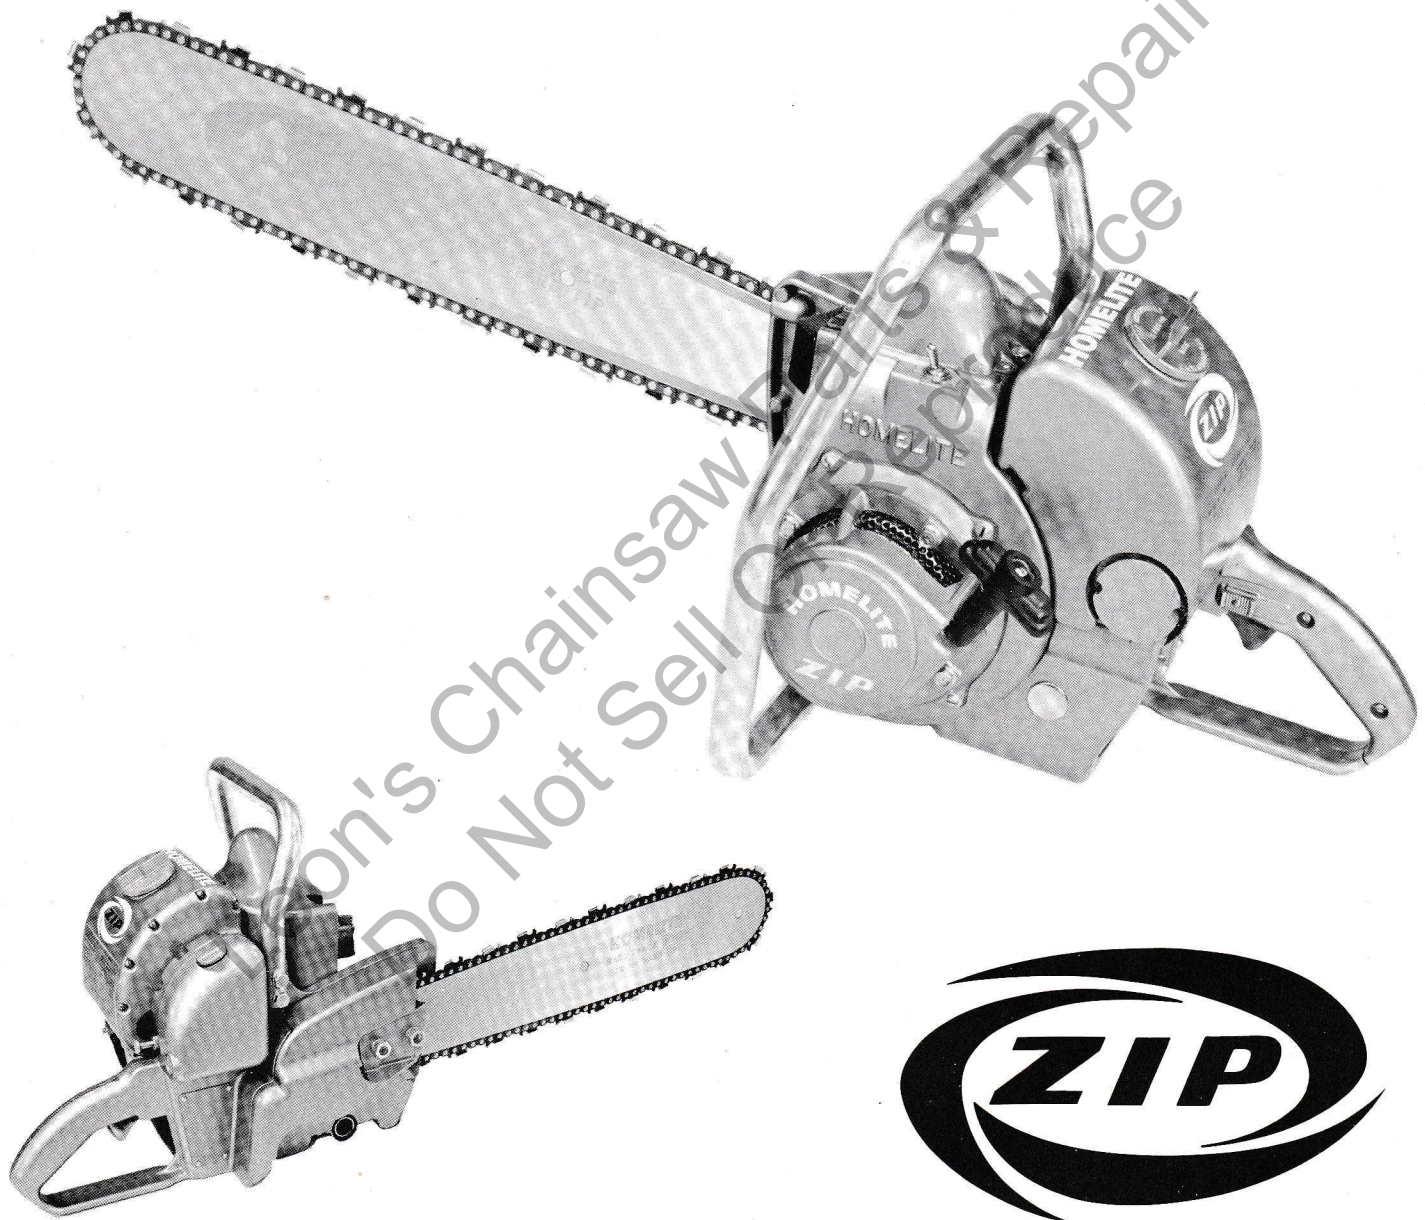

HOMELITE

A DIVISION OF TEXTRON INC.
PORT CHESTER, NEW YORK, U.S.A.

MECHANICAL FEATURES OF THE NEW ZIP CHAIN SAW

New "Plastisol" ends on Wix air filter for better sealing and filtering.
New, stronger, longer-wearing clutch spider made of powdered steel.
Saw will be equipped with new long-flange chain guide plates to direct chain into groove . . . even on longer bars.

Saw will be equipped with a new fuel cap relief valve which can be installed without screws. It is much easier to replace and eliminates troubles resulting from improper installation.

GENERAL SPECIFICATIONS ZIP

Bore	2"
Stroke	1½"
Displacement	4.7
Fuel Tank Capacity	45 Ounces
Oil Tank Capacity	13 Ounces
Maximum Engine RPM	No Load 7000, Load 6000
Type Sprocket	7/16" Pitch, 7 Tooth
Chain Speed f.p.m.	No Load 3573, Load 3062
Weight	Dry-less bar and chain, 18 lbs., 7 oz.

Leon's Chainsaw Parts & Repair
Do Not Sell Or Reproduce

HOMELITE

A DIVISION OF TEXTRON INC.

PORT CHESTER, NEW YORK