



CHAIN SAWS FOR THE HOMEOWNER, FARMER AND PROFESSIONAL



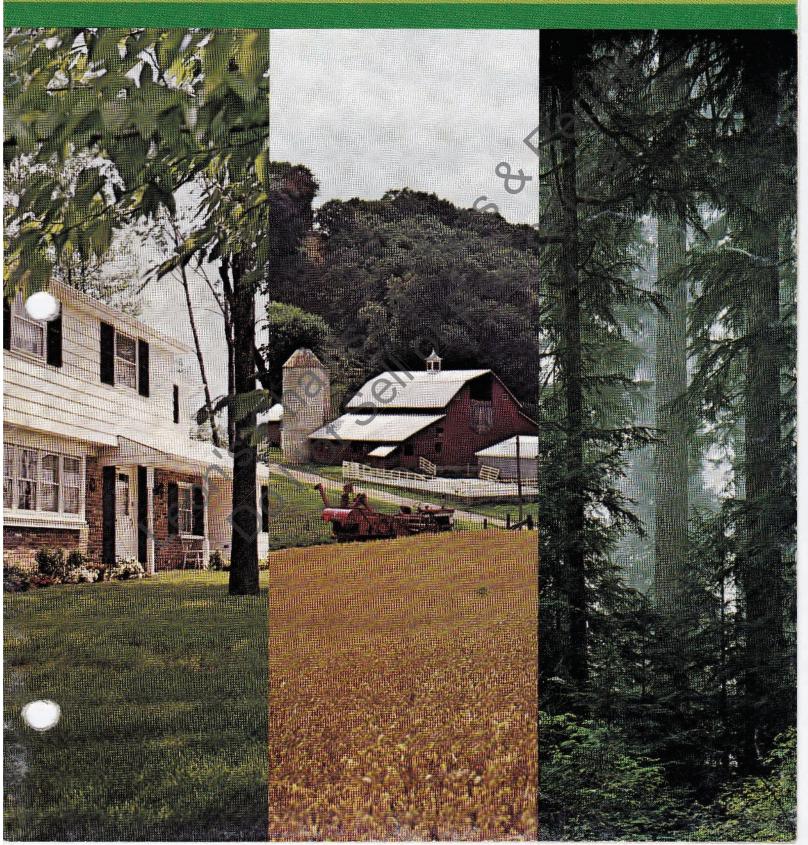

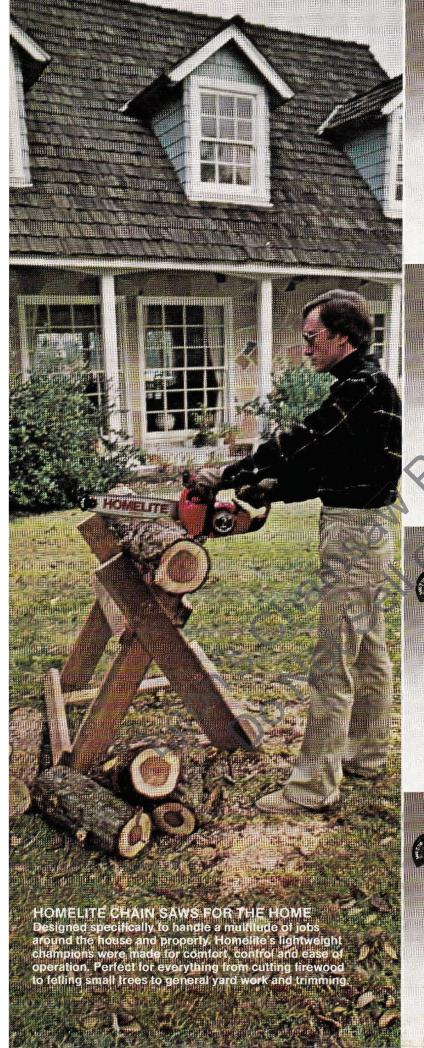

XL[®] AUTO Homelite's lightest chain saw. Specially designed for weekend projects. Features include automatic chain oiling, fingertip controls, all-weather ignition, Softone™ muffler. Available with 10" or 12" bar.




XL[®]-2 AUTOMATIC Homelite's Twin Trigger[®] dual control system allows shifting the XL-2's balance to match different cutting jobs. Complete with 12" Power Tip[®] bar, large fuel and oil tanks, Softone[™] muffler and automatic chain oiling.



SUPER 2 All the features of the XL*-2, plus 20% more power. Deluxe rubber covered handlebar for extra comfort. Twin Trigger* dual control system and 14" Power Tip* bar.



reduces operator fatigue. Deluxe front hand guard and rubber-covered handlebar for greater control and comfort. Safety interlock trigger. 14" Power Tip® bar.

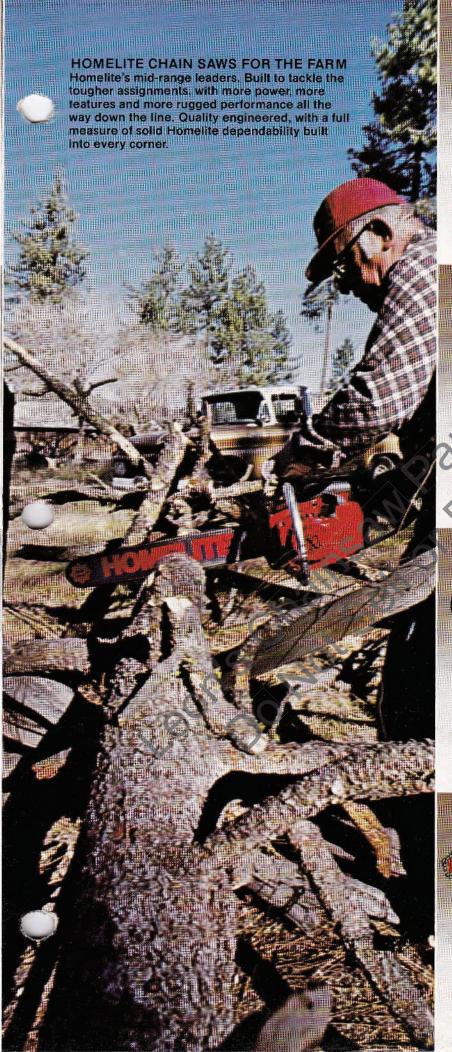



150 The value champion of our mid-range line. The 150 turns in big saw performance without a big saw price. Features large fuel and oil tanks, 16" Power Tip® bar, automatic chain oiling, all-weather ignition and Softone™ muffler.




SUPER EZ® Even with a 16" Power Tip® bar, the Super EZ weighs less than 11 lbs. Both automatic and manual chain oiling match all cutting conditions. Rubber-coated handlebar and rear grip for comfort and control. SimplexTM compression release for fast, easy starting



XL-12 The first lightweight, high-performance chain saw in the world. The XL-12 will drive a cutting bar up to two feet long. Over one million sold to date.



SUPER XL® The deluxe version of our popular XL-12, with 17% more power, larger fuel and oil tanks. Both manual and automatic chain oiling suit virtually any cutting condition. Bar lengths range from 16" to 24."

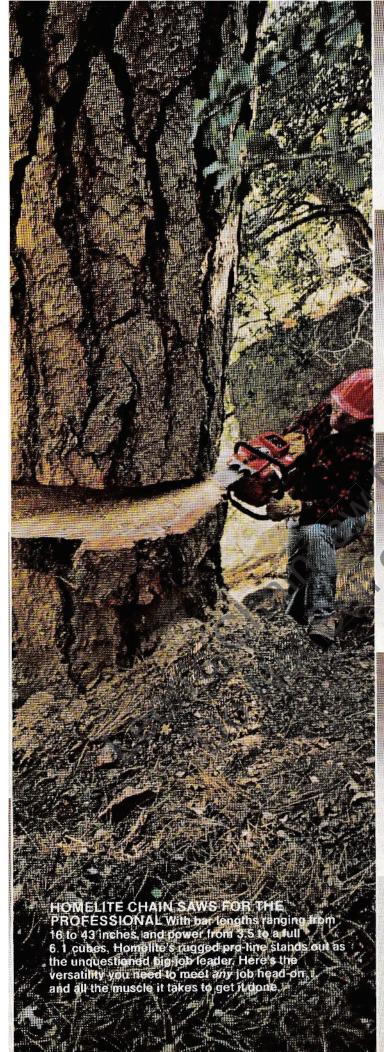



360 Advanced design packs enough muscle to drive cutting bars up to 28" into a 13.2 lb. package. Vibration isolated 3.5 cubic inch engine. Adjustable automatic oiling, rubber-coated handlebar and grip, capacitor-discharge ignition, SoftoneTM dual chamber muffler.



450 Modern vibration isolated chain saw. More power, more performance from high speed hemi-head engine. Larger fuel and oil tanks for fewer "pit stops" on the job. Super CD ignition, both automatic and manual chain oiling, advanced balanced design. Unique chain tensioning device. Choice of bow or bar. Bar lengths range from 15" to 36."



SUPER XL®-925 A full five cubes of rugged, hemi-head muscle. Features large fuel and oil tanks, solid state CD ignition, both manual and automatic chain oiling. Choice of bar or bow. 15" to 36" bar lengths available.



SUPER 650 Advanced vibration isolated chain saw with 6.1 cubic inch hemi-head engine. Cutting bars range from 20" to 43" for big-timber capability. Simplex™ triple-action starting, super CD ignition, large volume tanks, automatic and manual chain oiling. Large sawdust discharge chute prevents clogging.

C-72 Built tough, with a time-proven record of top performance. Comes with your choice of bar or bow. Features all-weather ignition, manual chain oiling, large fuel capacity. Bar lengths available from 14" to 28."

SUPER WIZ 66 Large 4.7 cubic inch gear drive chain saw. Designed especially to handle the most rugged assignments. Extra heavy-duty gear box for long life under high stress conditions. Epoxy-impregnated coil resists heat, dust and moisture. Choice of bar or bow. Bar lengths from 19" to 37" available.



CHAIN SAW ACCESSORIES

GUIDE BARS Available in gas welded, sprocket-nose or Homelite Power Tip®.

SAW CHAIN Variety of sizes, gauge and pitch.

WOODCUTTER'S KIT Seven most-asked-for accessories in a money-saving package.

BAR & CHAIN OIL Quart bottles to 55 gallon drums.

FLAT FILE Ideal for filing depth gauges.

ROUND FILE For sharpening of saw chain cutters.

DEPTH GAUGE JOINTER Measures depth gauge height.

FILE GUIDE AND FILE To maintain correct filing angle of cutters.

WEDGES Avoids binding during heavy cutting.

GREASE GUN For lubricating power tip guide bars and regular-type grease fittings.

GAS CAN AND NOZZLE In 1, 21/2 and 5 gal. sizes.

SPARK PLUGS For all Homelite models.

CARRY CASES Hold saws securely for transport, storage.

2 CYCLE ENGINE OIL To be mixed with gasoline for lubricating engines.

THE HOMELITE SAFE-T-TIP® Protects you and your saw.

When the unshielded nose of a chain saw hits a solid surface, the whirling chain may cause the entire saw to kick back toward the operator.

By shielding the nose of the cutting bar against contact, the SAFE-T-TIP completely prevents "kickback" from happening.

Also protects the nose of the saw from contact with

dirt, stones and obstructions which dull or damage the chain.

NOTE: When the full bar length is needed, the SAFE-T-TIP can be temporarily removed easily and quickly.



XLBC-4 BRUSHCUTTER

Specially designed for clearing brush, undergrowth and saplings up to 2" diameter. Patented, reversible Tri Arc® blade has cutting edges on both sides, easily sharpened with a flat file. An optional sawtooth blade is available for larger saplings. Ignition-stop button on throttle for safety. Handlebar mounting is adjustable to suit operator. Powered by Homelite's 2-cycle, 3.31 cubic inch governed engine. Operates at 5,500 RPM under load, 6,300 RPM no load. 18 ounce fuel capacity. Weight: 28 lbs.

CHAIN SAW SPECIFICATIONS

| 1 | | | | | | | | | | | | |
|----------------------------|-----------|-----------|---------|------------------------|----------|------------|---------------------|---------|------------------------|----------|-----------|----------|
| MODEL | CHANN OF | MATIC OFF | ALLER . | TAMOLERAM & | AR SILES | ARELLIES . | DISPLACE COMPLETE | AESSION | CMITTON CF | | CHAIN OIL | SAFETTIB |
| XL® | 7.1 lbs. | YES | | STEEL | 10"-12" | 37 | 1.6 cu." | 100 | STANDARD | 8.5 oz. | 6.1 oz. | STANDARD |
| XL2 | 7.1 lbs. | YES | | ALUMINUM | 12" | 37 | 1.6 cu." | | STANDARD | 8.5 oz. | 6.1 oz. | STANDARD |
| Super 2 | 7.3 lbs. | YES | | THICK RUBBER COATED | 14" | 37 | 1.9 cu." | | STANDARD | 8.5 oz. | 6.1 oz. | STANDARD |
| VI Super 2† | 9.0 lbs. | YES | | THICK RUBBER COATED | 14" | 37 | 1.9 cu! | | STANDARD | 10.0 oz. | 7.3 oz. | STANDARD |
| 150 | 9.2 lbs. | YES | | VINYL COATED | 16" | 38 | 2.6 cu! | | STANDARD | 16.0 oz. | 8.0 oz. | STANDARD |
| Super E-Z | 8.7 lbs. | YES | YES | THICK RUBBER COATED | 16" | 38 | 2.5 cu! | YES | STANDARD | 14.3 oz. | 4.2 oz. | STANDARD |
| XL12 | 13.2 lbs. | | YES | ALUMINUM | 16"-24" | 38 | 3.3 cu." | | STANDARD | 20.1 oz. | 2.8 oz. | OPTIONAL |
| Super XL | 14.0 lbs. | YES | YES | ALUMINUM | 16"-24" | 38 | 3.5 ¢u!' | | STANDARD | 24.2 oz. | 5.0 oz. | OPTIONAL |
| 360**† | 13.2 lbs. | YES | | THICK RUBBER COATED | 16"-28" | 38 | 3:5 cu! | | CAPACITOR DISCHARGE | 23.3 oz. | 10.1 oz. | OPTIONAL |
| 450**† | 17.3 lbs. | YES | YES | THICK RUBBER COATED | 16" 36" | 38 | 4.5 cu!! | | CAPACITOR DISCHARGE | 31.0 oz. | 19.0 oz. | OPTIONAL |
| Super 650† | 21.5 lbs. | YES | YES | THICK RUBBER COATED | 20"-43" | 40 | 6.1 cu! | YES | CAPACITOR | 42,0 oz. | 19.0 oz. | OPTIONAL |
| Super XL-925 | 16.7 lbs. | YES | YES | THICK RUBBER | 15"-36" | 38 | 5.0 cu ^y | | CAPACITOR DISCHARGE | 34.3 oz. | 12.2 oz. | OPTIONAL |
| C-72 | 19.0 lbs. | | YES | PLASTIC GRIP | 14"-28" | 38 | 4.9 cu!' | | STANDARD | 40.0 oz. | 8.0 oz. | OPTIONAL |
| GEAR DRIVE Super Wiz 66 | 22.7 lbs. | | (ES | ALUMÎNUM | 19"-43" | 50 | 4.7 cu!' | | STANDARD | 53.0 oz. | 7.0 oz. | N.A. |

NOTE: Safe-T-Tip available only for Homelite GW and PT Guide Bars.

*less bar and chain
**also available with chain brake (Models 360 SL & 450 SL)

tvibration isolated

Homelite offers a complete line of quality chain saws, multi-purpose saws, brushcutter, pumps, generators, concrete vibrators, compactors and blowers for home, farm, industrial and commercial applications. For details and information, contact Homelite Division of Textron, P.O. 7047, Charlotte, N.C. 28217 or:

> WALTER A. SMITH, INC. SALES, SERVICE AND PARTS RIEGELSVILLE, PA. 18077 PH. 749-2151. AREA CODE 214



Homelite Division of Textron Inc.

Specifications subject to change without notice.