HOMELITE

DIRECT DRIVE CHAIN SAW

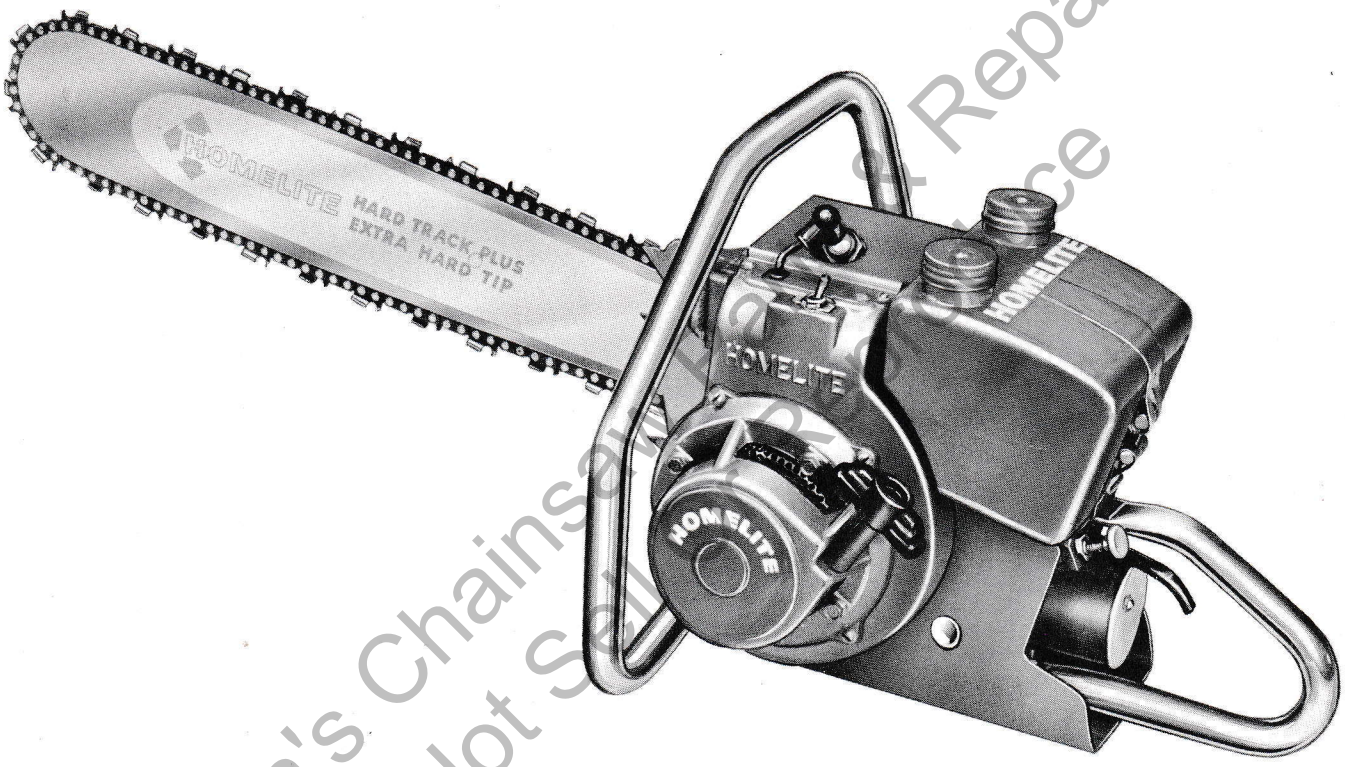

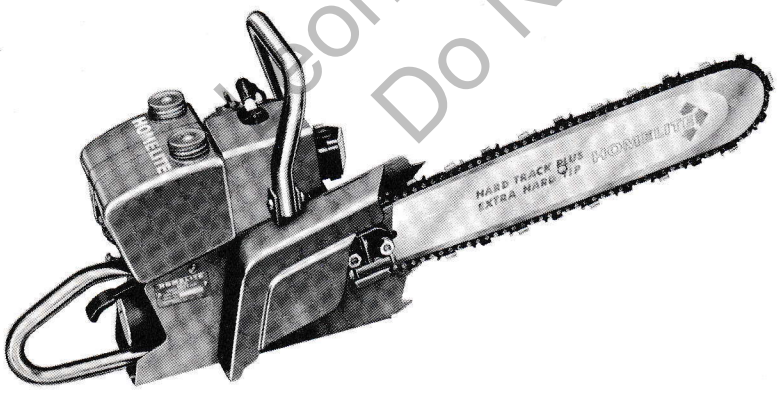

500

Jon's Chainsaw Parts & Repair
Do Not Sell or Reproduce

HOMELITE
A DIVISION OF TEXTRON INC.
PORT CHESTER, NEW YORK, U.S.A.

MECHANICAL FEATURES OF THE NEW "500" CHAIN SAW

New housing protects air filter and carburetor.

New, stronger, longer-wearing clutch spider made of powdered steel.

Saw equipped with new long-flange chain guide plates to direct chain into groove . . . even on longer bars.

Saw equipped with new sawdust shield which encloses sprocket.

GENERAL SPECIFICATIONS OF THE NEW "500"

Bore	2"
Stroke	1½"
Displacement	4.7
Maximum Engine RPM	6000-7000 under load
Type Reed	Flat
Fuel Tank Capacity	46 Ounces
Oil Tank Capacity	20 Ounces
Type Sprocket	7/16" pitch, 7 tooth
Chain Speed f.p.m.	3062 under load
Weight	Dry, less bar and chain 19 lbs., 6 ounces

Leon's Chainsaw Parts & Repair
Do Not Sell Or Reproduce

HOMELITE

A DIVISION OF TEXTRON INC.

PORT CHESTER, NEW YORK

PART NO. 273
50M 8-60

PRINTED IN U.S.A.
C&L LITHO