
HOMELITE

GEAR DRIVE CHAIN SAW

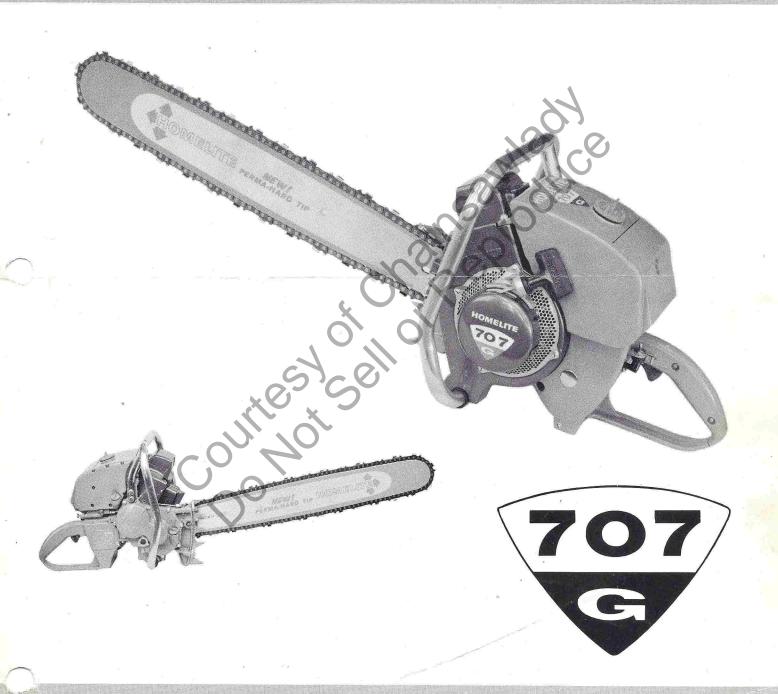

HOMELITE

A DIVISION OF TEXTRON INC.
PORT CHESTER, NEW YORK, U.S.A.

MECHANICAL FEATURES OF THE NEW 707G CHAIN SAW

- 1. New, heavier, counterbalanced crankshaft has been increased in diameter ½6" on magneto end, ¾2" on the crankpin and ½8" on reinforcing boss on magneto side.
- 2. New longer stroke increases displacement to 5.8 cu. in. adding about 6% more power.
- 3. New, flat, pleated, strong, paper air filter with 70 square inches of filtering area.
- 4. The new filter, recessed in rear of tank, scoops air in from back of saw Easily removed for quick cleaning. Stays cleaner longer.
- 5. New switch located close to throttle for easier control of unit.
- 6. New fitted bolts in drive case provide more rugged mounting for guide bars regardless of length.
- 7. New four point mounting secures fuel tank to 707G for long trouble-free service.
- 8. New third point mounting for handle bar, in bottom recess of air shroud, gives solid support for heavy duty production cutting.
- 9. 6" diameter magneto rotor provides extra cooling for more powerful engine.
- 10. New connecting rod with bigger needle bearing for greater load carrying capacity.
- 11. Automatic governor keeps engine at proper speed range and avoids overheating of engine.
- 12. Pistol grip on 707G has been beefed up for added strength.
- 13. New, improved magneto with attached breakerarm pivot post for easy assembly and disassembly.

GENERAL SPECIFICATIONS ON THE 707G CHAIN SAW

Displacement 5.8 Cubic Inches

Fuel Tank Capacity 60 Ounces

Oil Tank Capacity . . . 6.75 Ounces

Maximum Engine RPM . . No Load 7000, Load 6600

Sprocket ½" Pitch—8 Tooth

Chain Speed f.p.m. 2.84 to 1 ratio, No-Load 1643, Load 1408

3.57 to 1 ratio, No Load 1307, Load 1120

Weight Dry-less bar, chain, 21 lbs., 3 oz.

HOMELITE

A DIVISION OF TEXTRON INC

PORT CHESTER, NEW YORK

PART NO. B-283 10M-5-61 PRINTED IN U.S.A.
C&L LITHO