

Hedge Trimmer



String Trimmer



Riding Mower



HO

Homelite has many other grounds maintenance products to help you enhance the value of your property:

**Walk-Behind
Lawn Mowers**

Brushcutters

Blower/Vacs

Edgers

Pressure Washers

Space Heaters

Generators

Snow Throwers


Water Pumps

Air Compressors

Tractors

Plus, a full line of lawn and garden and chain saw accessories, including 2-cycle engine oil and brushcutter blades.

All around your home, you'll find that Homelite® outdoor power equipment is specifically designed to help you maintain the beauty of your home and property. Recent consumer market research studies* show that landscaping can add up to 14% to a home's value. It is easy to see that proper maintenance of your outdoor property can be worth thousands of dollars to you.

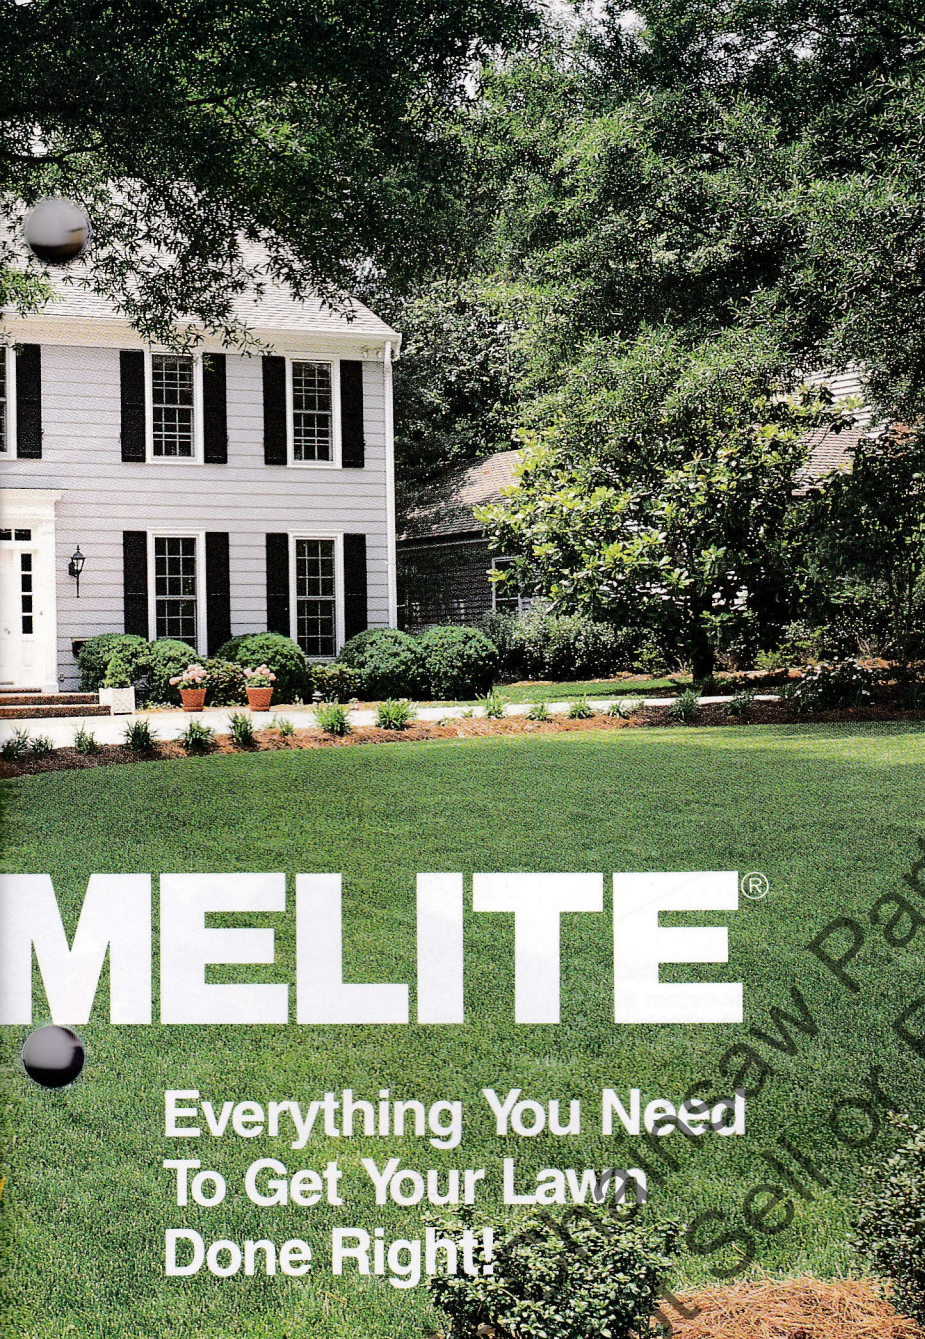

MELITE®

Everything You Need
To Get Your Lawn
Done Right!


As you read this catalog, you'll note the wide range of quality outdoor power equipment units available from Homelite. And, Homelite constantly searches for newer and better ways to make our products more reliable, more convenient, safer and easier to use. At the same time, we make sure you're getting the best value for your investment.

*Source: Trendonomics and National Gardening Assoc.

Chain Saw



Blower

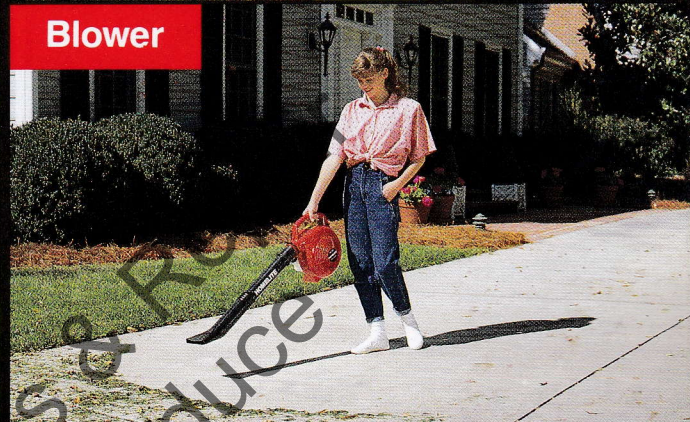

Tiller-Cultivator



TABLE OF CONTENTS

HEDGE TRIMMERS	4
STRING TRIMMERS & BRUSHCUTTERS	6
CHAIN SAWS	14
WALK-BEHIND LAWN MOWERS	24
EDGERS	33
RIDING MOWERS	34
LAWN TRACTORS	36
BLOWERS & BLOWER/VACS	38
TILLERS & CULTIVATORS	40
PRESSURE WASHERS	41
SPACE HEATERS	42
GENERATORS	44
PUMPS	48
AIR COMPRESSORS	50
SNOW THROWERS	51
HOMELITE OFFICES WORLDWIDE	52

HEDGE TRIMMERS

RUGGED AND LIGHTWEIGHT TO TRIM HOURS OFF YOUR WORK.

When you select a hedge trimmer, there are several things to consider:

1) TYPE AND LENGTH OF BLADE.

A double-edge blade allows you to cut in both directions, back and forth. However, a single-edge blade is usually longer, to give you more reach to trim wide bushes and shrubs.

2) WEIGHT AND BALANCE.

The hedge trimmer should be lightweight and well-balanced for maneuverability and comfort.

3) AMOUNT OF TRIMMING YOU WILL DO.

This will help determine the fuel capacity you need for trimming over an extended period.

THE HOMELITE® HT-17 PUTS QUALITY AND INNOVATION IN YOUR HANDS TO MAKE HEDGE TRIMMING EASIER.

NEW! HT-17 HEDGE TRIMMER

The HT-17 is a powerful, portable gas-powered hedge trimmer with the light weight and flexibility of an electric trimmer without the annoying extension cord. This dependable trimmer can go anywhere to trim and manicure hedges, bushes, brush and even branches up to 3/8 in. thick.

2 YEAR
LIMITED WARRANTY
MADE IN THE USA

A BREAKTHROUGH IN LIGHTWEIGHT, GAS-POWERED PERFORMANCE!

Longer Engine Life. Chrome-plated cylinder wall virtually eliminates wear, reduces friction and improves ring life.

1-To-3 Pull Starts. Integrated primer bulb and diaphragm carburetor deliver quick starts.

Lightweight. Aluminum and plastic construction provides exceptional strength, yet the weight is just under 9 lbs.

Fingertip Controls. Pistol grip throttle control, easy access choke and convenient on-off switch are at your fingertips.

Trims In Any Position. Fully adjustable carburetor allows cutting in any position.



HT-17

Smooth Cutting Action. 17 in. single reciprocating double-sided cutter blade means smoother, faster, more complete cutting.

Three-point Vibration Isolation. Reduces fatigue and makes your work easier.

Reliable Starts. No Maintenance. The solid-state ignition means dependable starts time after time with no maintenance worries.



Smooth Cutting Action. 17 in. single reciprocating double-sided cutter blade means smoother, faster, more complete cutting.

Safety Protection. Wraparound handle gives you a sure grip at any angle. Front hand-guard puts protection between you and the blade.


Quiet. Three-chamber, low-tone muffler reduces noise.

One To Three Pull Start Capability!

An integrated primer bulb and diaphragm carburetor provide quicker starts than comparable trimmer engines.

HT-21 HEDGE TRIMMER

This gas-powered unit gives you the same lightweight and ease of maneuverability as the HT-17. However, it has a 21 inch single reciprocating double-sided cutter blade (4 inches longer than the HT-17).

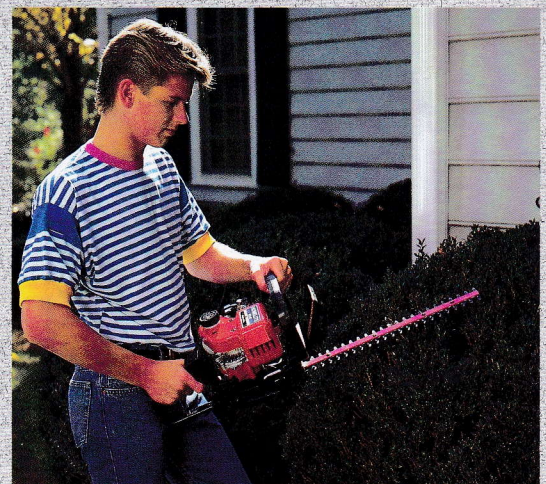

The HT-17. America's first lightweight gas-powered trimmer with the versatility of an electric without the cord.

HEDGE TRIMMER SPECIFICATIONS

Model	UT No.	Engine	Blade Length	Blade Type	Fuel Capacity	Weight
HT-17	18007	16 cc 2-cycle	17 in. (43 cm)	Double-edge	4.2 oz. (125 ml)	8¾ lbs. (3.9 kg)
HT-21	18011	16.3 cc 2-cycle	21 in. (53 cm)	Double-edge	4.2 oz. (125 ml)	9 lbs. (4 kg)

NOTE: Specifications subject to change without notice.

STRING TRIMMERS & BRUSHCUTTERS

ENGINEERED FOR THE WAY YOU WORK

Whatever trimming or cutting job you face around your home, your farm or your work site, Homelite gives you a wide range of practical, powerful tools to choose from. Here, state-of-the-art engineering and innovation are put right in your hands to make your work easier and more comfortable.

Every feature of every Homelite® trimmer and brushcutter is specifically designed to benefit you, the user.

SELECTING A STRING TRIMMER OR BRUSHCUTTER

Homelite offers a complete line of gasoline and electric string trimmers and brushcutters to make light work of any property maintenance job you may have. As always, each of our trimmers and brushcutters meets strict standards for quality and reliability. To select the right trimmer or brushcutter for your needs, there are several things to consider.

New Compact Design. The new compact engine housing design offers a streamlined, less bulky look.

Perfect Balance. Less Fatigue. Sophisticated top-mounted, low-vibration engine provides perfect balance for less operator fatigue.

25% Easier Starting! The larger pulley requires 25% less effort to start than our nearest competitor. In some cases, our engine is more than twice as easy to start.

Longest Pull-Rope In The Industry! 42 in. (106 cm) pull-rope assures reliable starts and protects the engine from starter damage.

Instant Acceleration. Throttle control lever permits immediate acceleration when trimming.

Quick Stopping Without Restarting! Centrifugal clutch stops cutting blade when throttle is released.

Convenient Fingertip Controls! Easy-to-use controls in the handle for easy operation.



There are 14 gasoline-powered string trimmer and brushcutter models and 6 electric models to choose from.

The Perfect Oil/Gas Mix Everytime!

NEW! Homelite® Exact Mix™ 2-Cycle Engine Oil

This premium-grade engine oil is specially formulated for use in all air-cooled, 2-cycle engines. The unique, unbreakable bottle features a handy measuring chamber to assure the right oil-to-gas mixture, whether you're mixing a gallon or more.



Equipped With
Primer Bulb
 for
 Easy 1 to 3 Pull
 Starting*

**Double Duty Trimmer
 And Brushcutter All In One!**
 A Tri-Arc™ blade, saw tooth blade or
 new Machete™ blade can turn your
 string trimmer into a brushcutter to
 cut through vines and heavy weeds.*

Adjustable L-Type Handle.
 The L-type handle adjusts
 easily along the shaft to suit
 your height and reach for
 comfortable operation.

* All Homelite® gas-powered
 string trimmers and brush-
 cutters feature a quick start
 primer bulb system.

Comes Fully Assembled!

No "Green Pants!" Our
 extra-long 61 in. (155 cm)
 drive tube lets you stand
 back from your trimming and
 away from the clippings.

**50% Fewer Parts! Greater
 Reliability!** Our efficient
 string advance system has
 50% fewer moving parts than
 other trimmers. That means
 greater dependability.

Faster, Smoother Cutting!
 17 in. (43 cm) swath, dual-
 line trimming head means
 less vibration and quicker
 cutting.

ST-185

Electric Vs. Gasoline

Generally, if you're trimming within
 100 feet of an electrical outlet, and if all
 you're trimming is grass or light weeds,
 a Homelite electric string trimmer is all
 you need.

If you have to trim areas out of reach
 of a 100-foot extension cord, or if you
 have a heavier than normal growth to
 trim, you'll appreciate the flexibility of a
 Homelite gasoline-powered string
 trimmer.

Shaft Type

String trimmers offer you a choice of
 two types of drive shafts: curved and
 straight. The curved shaft allows you to
 stay closer to your trimming for better
 control and handling. The straight drive
 shaft gives you a longer reach for hard-
 to-trim places such as under shrubs,
 fences and lawn furniture. A straight
 shaft also allows you to trim at different
 angles along slopes and contoured areas.



Extra Comfort!
 The comfort strap distributes the load
 from your hands to your shoulders to
 reduce fatigue.

2 YEAR
 LIMITED WARRANTY

*Tri-Arc™ and saw tooth blades fit
 models: ST-185, ST-385. Machete™ blade
 fits models ST-185, ST-385, ST-485,
 HBC-18, HBC-30 and HBC-30B.

STRING TRIMMERS & BRUSHCUTTERS

30 cc

Choose the Homelite® 30 cc Model That's Right For You.

The 30 cc series of string trimmers and brushcutters offers you a wide selection of gasoline-powered units for light, medium and heavy duty applications.

HLT-16

This lightweight string trimmer weighs only 9¾ pounds (4.4 kg). It's easy to start because of a unique primer bulb system for 1 to 3 pull start capability. **Standard Features:** ■ Quick start primer bulb system for easy starts. ■ Homelite® new design 30 cc 2-cycle engine has higher RPM and more torque power. ■ Dual-line 16 in. (40 cm) cutting swath. ■ Heavy-duty .095 (2.4 mm) gauge line. ■ E-Z-Line™ Advance System. ■ Adjustable loop handle for lower vibration. ■ Comfort strap (opt.).



HLT-17C

The unit is a step up from the HLT-16. It has a wide 17 inch cutting swath enabling you to get the job done faster. The string trimmer comes fully assembled in the carton. **Standard Features:** ■ Quick start primer bulb system for easy starts. ■ Homelite® new design 30 cc 2-cycle engine. ■ Dual-line 17 in. (43 cm) cutting swath. ■ Heavy-duty .095 (2.4 mm) gauge line. ■ Adjustable J-type handle. ■ E-Z-Line™ Advance System. ■ Lightweight at 10¾ pounds (4.9 kg). ■ Centrifugal clutch stops trimmer without stopping the engine. ■ Weed blade for medium duty cutting. ■ Comfort strap.



Light Duty

HLT-18

The HLT-18 has a wide 18 inch cutting swath for faster cutting. It has less vibration than ordinary string trimmer units due to its adjustable loop handle and dual line trimming head. **Standard Features:** ■ Quick start primer bulb system for easy starts. ■ Homelite® new design 30 cc 2-cycle engine. ■ Dual-line 18 in. (45 cm) cutting swath. ■ Heavy-duty .095 (2.4 mm) gauge line. ■ Adjustable loop handle. ■ E-Z-Line™ Advance System. ■ Lightweight at 9¾ pounds (4.4 kg). ■ Comfort strap (opt.).




Medium Duty

HBC-18

The multi-use unit (string trimmer and brushcutter) has a wide 18 inch cutting swath and dual-line head for fast weed trimming and brushcutting. **Standard Features:** ■ Homelite® new design 30 cc

2-cycle engine. ■ Quick start primer bulb for easy starts. ■ E-Z-Line™ Advance System. ■ Dual-line 18 in. (45 cm) cutting swath. ■ Heavy-duty .095 (2.4 mm) gauge line. ■ Adjustable J-type handle with comfort grip. ■ Centrifugal clutch stops trimmer without stopping the engine. ■ Comfort strap. ■ 8 in. (20 cm) Tri-Arc™ blade and 7 in. (18 cm) Machete™ Blade (opt.).

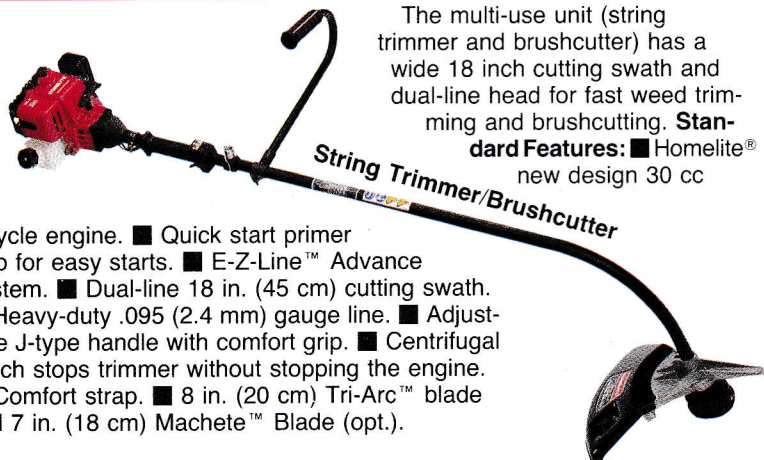

30 CC & 40 CC MODEL SPECIFICATIONS

Model	HLT-16	HLT-17C	HLT-18
UT No.	20585	20586	20584
Engine Displacement	30 cc	30 cc	30 cc
Cutting Swath in. (cm)	Dual 16 (40)	Dual 17 (43)	Dual 18 (45)
Drive Shaft	Curved (Flex)	Curved (Flex)	Curved (Flex)
Line Feed	E-Z-Line™	E-Z-Line™	E-Z-Line™
Clutch	No	Yes	No
Handle	Adjustable Loop	J-Barrier Bar	Adjustable Loop
Guard Deflector	Plastic	Plastic 100°	Plastic 100°
Running Time (min.)	70-90	70-90	70-90
Line Diameter in. (mm)	.095 (2.4)	.095 (2.4)	.095 (2.4)
Wt. Lbs. (kg)	9¾ (4.4)	10¾ (4.9)	9¾ (4.4)

NOTE: Specifications subject to change without notice.


STRING TRIMMERS & BRUSHCUTTERS

25 cc

FULLY ASSEMBLED!



FULLY ASSEMBLED!

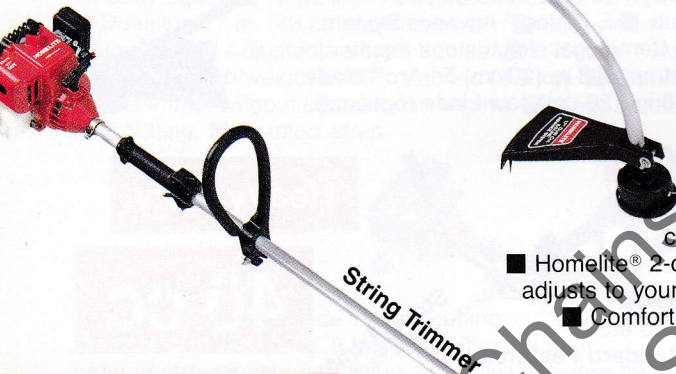

FULLY ASSEMBLED!



MADE IN THE USA

CHOOSE THE HOMELITE® 25 CC MODEL THAT'S RIGHT FOR YOU.

Homelite offers you a wide selection of gasoline-powered string trimmers, some capable of converting to powerful brushcutters. All of these units feature the Homelite® 25 cc 2-cycle engine. With such a choice you are sure to find the right model for your needs and your budget.

ST-155

This practical string trimmer features a dual-line trimming head that cuts a 15 in. (38 cm) swath. The E-Z-Line™ Advance System adds trimming line while cutting with a simple tap of the cutting head. **Standard Features:**

- Homelite® 2-cycle engine.
- D-type handle adjusts to your most comfortable working position.
- Comfort strap (optional).

ST-175

This handy string trimmer takes you a step up from the ST-155. It gives you a wider 17 in. (43 cm) cutting swath and its dual-line trimming head gives you faster cutting with less vibration.

- Standard Features:** ■ E-Z-Line™ Advance System. ■ Homelite® 2-cycle engine. ■ Adjustable loop-type, anti-vibration handle for comfort and control. ■ Comfort strap (optional).

ST-175BC

The ST-175BC gives you an extra measure of operational convenience and control with its centrifugal clutch which disengages the cutting head without stopping the engine. In addition, it offers a wide 17 in. (43 cm) cutting swath as well as a dual-line trimming head for better cutting with less vibration. **Standard Features:** ■ E-Z-Line™ Advance System. ■ Homelite® 2-cycle engine. ■ Adjustable L-type, anti-vibration handle for comfort and control. ■ Comfort strap. ■ Weed blade for medium duty cutting.



25 CC MODEL SPECIFICATIONS

Model	ST-155	ST-175
UT No.	20539B	20541B
Engine Displacement	25 cc	25 cc
Cutting Swath in. (cm)	Dual 15 (38)	Dual 17 (43)
Drive Shaft	Curved (Flex)	Curved (Flex)
Line Feed	E-Z-Line™	E-Z-Line™
Clutch	No	No
Handle	D-Handle	L-Handle
Guard Deflector	Plastic	Plastic
Running Time (min.)	70-90	70-90
Line Diameter in. (mm)	.080 (2)	.080 (2)
Wt. lbs. (kg)	9¾ (4.4)	9¾ (4.4)

25 cc

SPECIAL FEATURE!

All Homelite® string trimmers and brushcutters have a special carburetor priming system for 1 to 3 pull/start capability.

FULLY ASSEMBLED!

ST-185, ST-185C*

This dependable trimmer takes on the tough jobs. Its wide 17 in. (43 cm) cutting swath and dual-line head give you plenty of smooth trimming power. With its 8 in. (20 cm) Tri-Arc™ blade standard, the ST-185 converts quickly and easily into a brushcutter for cutting vines, heavy weeds and brush. For heavy-duty cutting, you can also add the optional 8 in. (20 cm) saw blade. **Standard Features:** ■ E-Z-Line™ Advance System. ■ Homelite® 2-cycle engine. ■ Adjustable L-type handle for comfort and maneuverability. ■ Centrifugal clutch stops trimmer without stopping the engine. ■ Comfort strap.

* Brushcutter kit (optional)

ST-285BC

This popular trimmer combines performance with practicality. Its wide 17 in. (43 cm) cutting swath and dual-line head give you the smooth trimming power you need around your home. Its straight shaft design gives you the reach you need to trim under bushes, fences and lawn furniture. **Standard Features:** ■ E-Z-Line™ Advance System. ■ Homelite® 2-cycle engine. ■ Centrifugal clutch stops trimmer without stopping the engine. ■ Adjustable J-Barrier Bar handle for comfort and control. ■ Weed blade for medium duty cutting. ■ Comfort strap.

ST-385, ST-385C*

Balance, power and dependability make the ST-385 a rugged workhorse for heavy-duty jobs. This tough trimmer converts easily to a brushcutter to cut any job down to size. **Standard Features:** ■ E-Z-Line™ Advance System. ■ Homelite® 2-cycle engine. ■ Dual 17 in. (43 cm) cutting swath. ■ 68 in. (173 cm) heavy-duty straight shaft for plenty of reach and maneuverability. ■ Centrifugal clutch stops trimmer head without stopping the engine. ■ Adjustable D-type handle for stability and control. ■ Comfort strap. ■ 8 in. (20 cm) Tri-Arc™ blade for swift, sure brushcutting. ■ 8 in. (20 cm) saw blade (optional) for heavy-duty cutting. ■ .095 in. (2.4 mm) diameter monofilament line.

* Brushcutter kit and strap (optional)

These units feature the Homelite® 25cc 2-cycle engine.

ST-175BC	ST-185 & ST-185C*	ST-285BC	ST-385 & ST-385C*
20553B	15039B 15079	20581	15040D 15078
25 cc	25 cc	25 cc	25 cc
Dual 17 (43)	Dual 17 (43)	Dual 17 (43)	Dual 17 (43)
Curved (Flex)	Curved (Flex)	Straight (Rigid)	Straight (Rigid)
E-Z-Line™	E-Z-Line™	E-Z-Line™	E-Z-Line™
Yes	Yes	Yes	Yes
L-Handle	L-Handle	J-Barrier Bar	D-Handle
Plastic	Metal	Metal	Metal
70-90	70-90	70-90	70-90
.080 (2)	.080 (2)	.080 (2)	.095 (2.4)
10¾ (4.9)	13½ (6.1)	10½ (4.7)	13 (5.8)

STRING TRIMMERS & BRUSHCUTTERS

ELECTRIC STRING TRIMMERS

Dependable, convenient Homelite® electric string trimmers are great for light yard work. Just plug them into an electrical outlet and you're

ready to go. All five models are double insulated for added protection and are UL approved. All models (except ST-10) feature our exclusive automatic line advance system. You simply press the trigger, release it, then the exact amount of line automatically advances as needed. In addition, our electric string trimmers feature adjustable front handles (except ST-10 and ST-20) and tough .065 in. (1.6 mm) line in convenient, easy-to-replace spools.

ST-10, ST-10A**

This lightweight trimmer is our most economical electric. Ideal for those small trimming chores around the home, the pistol grip handle makes it easy to use and it gets in close with its 10-in. cutting swath. The unit has a simple manual advance and dependable 2.0 amp electric motor.

ST-20

This lightweight trimmer has a 10 in. (25 cm) cutting swath and gives you an extra measure of convenience at an affordable price. Its unique Comfort Cutter handle makes one-handed operation remarkably easy. An automatic line advance feature lets you trim as long as you like without stopping.

ST-40

The ST-40 puts more work and performance at your fingertips. The larger 3.3 amp motor, combined with the dual 14 in. (35 cm) cutting swath, lets you take on thick grass and weeds with ease. The adjustable loop handle gives you the balance and stability you need for cutting control. Other features include automatic line advance for continuous trimming.

ST-30

This hard-working electric is the latest addition to our electric string trimmer line and gives you the extra reach of a straight-shaft trimmer. The long shaft and 12 in. (30 cm) cutting swath lets you trim in any position to handle those hard-to-reach places such as under shrubs and lawn furniture. The innovative top-mounted 3.3 amp motor provides excellent balance for cutting ease and control.


ST-70

The heavy-duty workhorse of our electric trimmer line, the ST-70 cuts big jobs down to size with its husky 5 amp motor. Its extra-wide 16 in. (40 cm) cutting swath lets you cover more ground in less time. The top-mounted motor gives you outstanding balance and control.

All models are double insulated for added protection and UL approved.



Innovative Homelite engineering puts the motor where it counts—in the handle—for perfect balance and ease in handling.

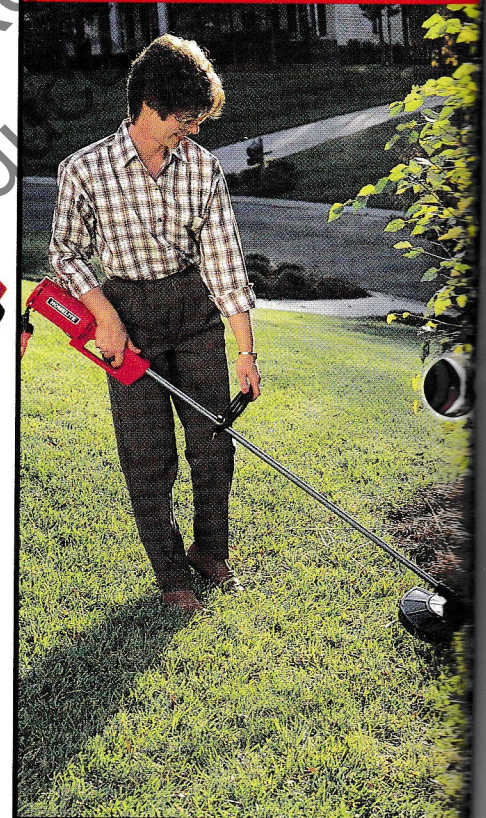

ELECTRIC STRING TRIMMER SPECIFICATIONS

Model	ST-10	ST-10A	ST-20	ST-40	ST-30*	ST-70*
UT No.	21509	21527	21510-A	21511-B	21523	21524-A
Motor Amps	2.0	2.0	2.0	3.3	3.3	5.0
Line Feed	Manual	Automatic	Automatic	Automatic	Automatic	Automatic
Cutting Swath in. (cm)	10 (25)	10 (25)	10 (25)	Dual 14 (35)	12 (30)	Dual 16 (40)
Line Diameter in. (mm)	.065 (1.6)	.065 (1.6)	.065 (1.6)	.065 (1.6)	.065 (1.6)	.065 (1.6)
Handle	Pistol Grip	Pistol Grip	Comfort Handle	Loop	D-handle	D-handle
Wt. Lbs. (kg)	3 (1.3)	3 (1.3)	3½ (1.6)	5½ (2.5)	5¾ (2.6)	6½ (2.9)


* Top mounted motor, straight drive

** The ST-10A is the same as the ST-10 with the addition of an automatic line advance system.

THE FULL ARRAY OF HOMELITE® GAS STRING TRIMMERS AND BRUSHCUTTERS


Today's new generation of Homelite® string trimmers and brushcutters gives you a wide range of power and high-performance units for every need. Trim any place that you want or cut weeds, brush or even small saplings with Homelite® power. The power starts with the rugged Homelite® two-cycle 25 cc and 30 cc engines designed specifically for the string trimmer lineup. Their features and 30 cc engine benefits are endless, for example:

- *Special Carburetor Priming System* for 1 to 3 pull/start capability.
- *Extended Running Life* from a chrome-plated

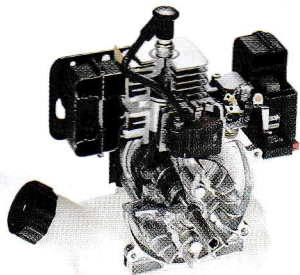

cylinder wall that virtually eliminates wear, reduces friction and improves ring life. • *Lightweight engines* are 10% lighter than comparable competitive engines. • *Top Mount Low-Vibration Engine* gives operator perfect balance, performance and less fatigue. • *New Design Homelite® Two-Cycle Engines* provide quick accessibility to engine components for easy maintenance. • *Diaphragm Carburetor* allows all position cutting during operation. • *Large Three-Chamber Spark Arresting Muffler* with special exhaust silencers effectively reduces engine noise. • *Solid-State Electronic Ignition* for easier starting and low maintenance. • *Low-Tone Intake System* on engine reduces noise levels. • *Forged High Alloy Steel Crankshaft* is more durable than ordinary steel. • *Crankshaft Ball Bearings* give greater durability and smooth performance. • *Top Quality Recoil Starter* provides easy, long-life starts. • *Large Translucent Fuel Tank* shows fuel level. The 23 oz. (65 L) fuel tank is the largest in the industry. Runs up to 1½ hours without refueling.

ORIGINAL REPLACEMENT PARTS AND ACCESSORIES

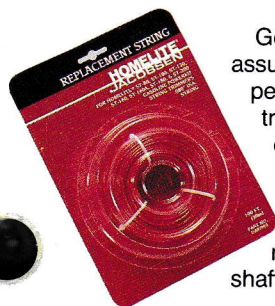

Genuine Homelite® replacement parts assure you of quality and dependable performance from your Homelite® string trimmer and brushcutter. In addition to our brushcutting blades, Homelite offers a complete assortment of replacement string. Prewound spools of monofilament line are available in the gauge you need for all curved shaft and straight shaft models.

Part No.	Description
DA-97952-A	Replacement .080 line (ex. ST-385).
DA-02598	Replacement .095 line — 30 cc units + ST-385.
DA-00714	7 in. (18 cm) Machete™ blade
98071	Replacement .105 in. (2.7 mm) line (brushcutters only)
DA-92703-A	Comfort shoulder strap
DA-98717/03164	8 in. (20 cm) Tri-Arc™ blade/10 in. (25 cm) size
D-98935	8 in. (20 cm) 50-tooth saw blade
98888	Homelite® 2-cycle engine oil 32:1
DA092707-A	Replacement .065 in. (1.6 mm) line (all electric models)

STRING TRIMMER & BRUSHCUTTER BLADE ACCESSORIES

Many of the Homelite® string trimmers also do double duty as powerful brushcutters with the addition of your choice of brushcutting blades.

Tri-Arc™ Blade

The hardened steel blade cuts cleanly through vines, heavy weeds and brush. The blade is reversible to give you a new set of cutting edges to work longer and harder.

Saw Tooth Blade

The 50 sharp teeth on our 8 in. (20 cm) saw blades easily cut down small saplings up to 3 in. (7.6 cm) in diameter. The saw tooth blade gives your trimmer/brushcutter added versatility.



New! The Machete™ Blade

The toughest brushcutter blade available. Now you can convert your gas-powered string trimmer/brushcutter into a unit that is extremely maneuverable and yet provides the cutting power of a chain saw. In the exclusive Homelite design, saw chain teeth are affixed directly to a steel rotating cutting blade giving you the cutting effectiveness of saw chain (at 10,000 RPM) while eliminating chain stretch. Now you can breeze through those tough jobs in cutting thick grass, high weeds, heavy brush and small trees. The Machete™ blade is available in 7 inch (18 cm) size.

CHAIN SAWS

DEPENDABILITY AND PERFORMANCE THAT HAVE NEVER BEEN EQUALED

Homelite is the recognized leader in chain saw technology, design and performance—with an impressive record of rugged dependability.

There are 13 models in our full line, including two electric units. That's 13 opportunities to find the one saw that perfectly fits your needs.

First, ask yourself a few basic questions. What type of cutting jobs will I do? Felling? Log cutting? Pruning?

How often will I do that work?

What is the thickness of wood I will be cutting?

What type of wood will I cut? How hard is it?

Your answers will guide you in selecting the right saw with the right features for the work you plan to do.

MADE IN THE USA

No Kickback! SAFE-T-TIP® anti-kickback device protects you and your saw.

Easy-Grip Filler Cap. Fueling is easy even with gloves on.

Exclusive Raker III® Saw Chain. This Homelite exclusive reduces kickback intensity without compromising cutting quality.

Added Protection. The front handguard protects you from contact with the front of the chain saw.

240

Added Leverage. Bumper spikes provide added leverage as you cut.

Thermoplastic Handlebar. provides a sure grip and easy handling.



With 15 chain saws (including two electrics) to choose from, there's a Homelite® chain saw perfect for your needs.

Simple Servicing. The convenient location and accessibility of the filter and carburetor chamber make field maintenance easy.

Comfortable Handling. Vibration isolation suspension system reduces vibration at all speeds.

Quiet Operation. Dual-chamber Softone™ muffler with side-mounted, bottom discharge provides quiet operation.

Readily Accessible Choke. The choke is positioned for easy operation with a gloved hand.



The exclusive SAFET-TIP® anti-kickback device prevents kick-back by shielding the nose of the cutting bar where kickback occurs. The SAFET-TIP® device also protects the chain at the bar nose from contact with dirt, stones and other obstructions which would dull or damage the chain. The SAFET-TIP® device is standard on all Homelite® chain saws.

DETERMINE YOUR DUTY RATING

The duty rating depends on the kind of cutting you will do and how often you will do it. Homelite® chain saws are available in three duty ratings:

Light Duty:

For use primarily around the home on an occasional basis. These can be either gasoline or electric powered.

Medium Duty:

For use around the home or in the forest on an occasional basis.

Heavy Duty:

For frequent use.



Longer Engine Life. Power-head design provides cooler operation for longer working life.

Convenient On/Off Switch.

Rear Handguard.

CHAIN SAWS



There are an endless number of jobs around the home that can be handled with a Homelite® chain saw.

POWER TO CUT AROUND-THE-HOME CHORES DOWN TO SIZE

LIGHT DUTY ELECTRIC

Uncomplicated, reliable Homelite® electric chain saws are double insulated for added protection. Push-button manual chain oiler assures longer chain life. Their quality ball-and-sleeve bearing construction eliminates the need for engine lubrication.

EL

These quiet, reliable electrics offer smooth operation with power to spare for cutting and trimming large logs. Rugged and dependable for years of hard use. **Standard Features:** ■ Electra™ guide bar. ■ Rear hand-guard for added operator protection. ■ Built-in device to maintain proper chain tension.



LIGHT DUTY GASOLINE

Homelite® light duty chain saws are excellent as an inexpensive, all-around utility chain saw for limbing, pruning and felling small trees. When used and maintained properly, these saws will provide years of trouble-free service.

Rugged and lightweight, they have all the quality features of our big saws—including chrome plated cylinders for smooth operation and longer service life.

XL®

Hemi-head, 2-cycle 1.8 cu. in. (30 cc) engine powers our lightest weight and lowest priced gasoline saw. Fiberglass-reinforced housings keep weight to a minimum and strength to a maximum. **Standard Features:** ■ Primer bulb for easy 1 to 3 pull starting. ■ Anti-vibration suspension system. ■ Chrome plated cylinder wall for extended engine life. ■ Hard Track or Power Tip® guide bar. ■ 37 Raker III® saw chain. ■ Automatic chain oiling. ■ Electronic solid-state ignition. ■ SAFE-T-TIP® anti-kickback device.



WITH A QUICK START PRIMER BULB

SUPER 2

The precision balanced Super 2 is easy to start and use. Its 2.0 cu. in. (33 cc) 2-cycle engine gives you everything you need to fell trees or cut logs. **Standard Features:** ■ Primer bulb for easy 1 to 3 pull starting. ■ Anti-vibration suspension system. ■ Chrome plated cylinder wall for extended engine life. ■ Power Tip® guide bar. ■ 37 Raker III® saw chain. ■ Comfortable thermoplastic handle-bar. ■ Automatic chain oiler. ■ Electronic solid-state ignition. ■ SAFE-T-TIP® anti-kickback device.



WITH A QUICK START PRIMER BULB



PERFORMANCE SAWS DESIGNED FOR ACTIVE WOODCUTTERS

200

This 2.0 cu. in. (33 cc) state-of-the-art chain saw has many consumer advantages. Its features are aimed at increasing the life and ease of operation of the chain saw. **Standard Features:**

- Primer Bulb for easy 1 to 3 pull starting.
- Anti-vibration suspension system.
- Chrome plated cylinder wall for extended engine life.
- 37 Raker III® saw chain.
- Automatic chain oiler.
- Electronic solid state ignition.
- Power Tip® guide bar.
- SAFE-T-TIP® anti-kickback device.
- Chain brake.

WITH A
QUICK START
PRIMER BULB



MEDIUM DUTY GASOLINE

Light yet rugged. Homelite® medium duty chain saws are the perfect saws for everyday use around the home, the job or the farm. They're nimble enough for limbing and pruning, with power to spare for tree felling and log cutting.

240

Packed with power and performance features, this lightweight model is great for the active woodcutter. Its rugged 2.4 cu. in. (39 cc) engine can easily handle a wide variety of cutting needs. Balanced design and vibration isolation assure operating comfort. Automatic chain oiling adds to bar and chain life.

- Standard Features:**
- Power Tip® guide bar.
 - 37 Raker III® chain.
 - Electronic solid state ignition for reliable starts.
 - Vibration isolation for smooth operation.
 - Automatic chain oiling for longer bar life.
 - SAFE-T-TIP® anti-kickback device.
 - Chain brake (opt.).



250

Designed for the semi-professional, the Homelite® 250 chain saw is a high performance unit that provides the ultimate in reliability, low fuel consumption and ease of maintenance along with a power-to-weight ratio that ranks it tops in the industry. Its powerful 2.5 cubic inch, 2-cycle engine has a chrome plated cylinder wall for extended engine life. And its advanced features and unit construction provide state-of-the-art technology at your fingertips.

- Standard Features:**
- Integrated primer bulb and diaphragm carburetor provide quick starts.
 - Improved muffler design results in one of the quietest running chain saws available.
 - Automatic adjustable oil pump for precision control of oil flow during operation.
 - Spring/rubber mounted anti-vibration.
 - SAFE-T-TIP® anti-kickback device.
 - Raker III® low kickback saw chain.
 - Chain brake.

WITH A
QUICK START
PRIMER BULB



CHAIN SAWS

MEDIUM DUTY SAWS (continued)


300

A great saw for the semi-professional. Its 3.0 cu. in. (49.2 cc) engine makes this a high performance saw ideal for the most demanding jobs. **Standard**

Features: ■ Primer bulb for easy 1 to 3 pull starting. ■ Spring/rubber mounted anti-vibration suspension system. ■ Chrome plated

cylinder wall reduces friction and improves engine life. ■ Power Tip® guide bar. ■ Adjustable automatic oil pump. ■ Improved muffler design. ■ Electronic solid-state ignition. ■ .325 Raker III® chisel chain. ■ SAFE-T-TIP® anti-kickback device. ■ Chain brake.

WITH A
QUICK START
PRIMER BULB

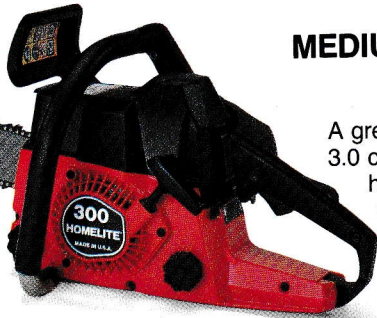

330

The 330 is a versatile saw packed with advanced features, including a three-shoe clutch for longer life. It is one of our more popular models. **Standard Features:**

■ Powerful 3.3 cu. in. (54 cc) 2-cycle engine. ■ Automatic chain oiling for longer bar life. ■ Thick rubber-coated handlebar for sure handling. ■ Interlock to prevent accidental chain engagement. ■ Electronic solid-state ignition for dependable starts. ■ SAFE-

T-TIP® anti-kickback device. ■ Chain brake (opt.).



360

The 360 is one tough customer. This rugged saw is a popular choice for professionals. Its powerful 3.5 cu. in. (57 cc) 2-cycle engine can tackle the most demanding cutting jobs. **Standard Features:**

■ Automatic chain oiling for longer bar life. ■ Power Tip®, gas-welded and sprocket tip guide bars in 16 to 24 inch (40 to 60 cm) lengths. ■ Raker III® series 38 chromed chain. ■ Vibration isolation for smooth operation.

■ Electronic solid-state ignition. ■ Deluxe, thick rubber coated handlebar and grip. ■ Throttle latch. ■ Conveniently located reusable air filter. ■ Dual chamber Softone™ muffler. ■ SAFE-T-TIP® anti-kickback device. ■ Chain brake (opt.).



SUPER XL®

The Super XL® features a powerful 3.5 cu. in. (57 cc) engine for fast cutting. It has a large fuel and oil capacity for extended cutting time. This is an ideal chain saw for farmers and contractors. **Standard**

Features: ■ Power Tip®, gas-welded and sprocket tip guide bars in 16 to 24 inch (40 to 60 cm) lengths. ■ Automatic chain oiling with manual override.

■ Professional style front and rear handguards. ■ Electronic


solid-state ignition. ■ Multi-chamber Softone™ muffler. ■ Raker III® series 38 chromed chain.

■ SAFE-T-TIP® anti-kickback device. ■ Convenient throttle latch.



1 YEAR
LIMITED WARRANTY

MADE IN THE USA

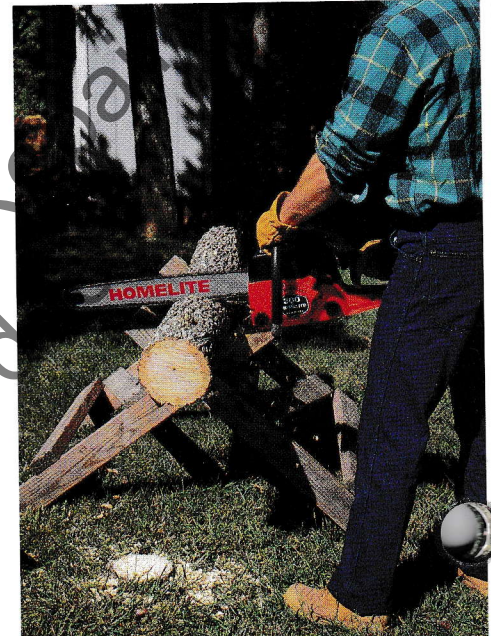

Whether you're clearing heavy storm damage or cutting chords of firewood, Homelite® medium duty chain saws get the job done in a hurry.

Warranty service can be obtained from a Homelite® dealer authorized to make warranty repairs. If you need warranty service, check first with the dealer from whom you purchased the product, or call the 1-800 phone number listed on page 52 and we will give you the name and location of the nearest dealer providing warranty service.

**PROFESSIONAL
QUALITY CHAIN
SAWS THAT CAN
TACKLE THE BIG
JOBS AROUND THE
HOME OR IN THE
WOODS.**

HEAVY DUTY GASOLINE

Homelite® heavy duty gasoline saws are designed for felling large trees and for regularly cutting large amounts of timber and firewood. Light enough for use around the home, yet powerful enough for the deep forest. These chain saws are especially popular with active woodcutting homeowners, professional tree services, farmers and those who want the dependability of a professional chain saw in a lightweight package.



Homelite® heavy duty chain saws are specially designed for daily use by loggers and woodcutters.

**A WORD
ABOUT
SAFETY**

Any power tool, when used improperly, can be dangerous. Proper protective clothing, including safety glasses when appropriate, should be worn when operating outdoor power equipment. Be sure to read and follow the operating instructions and safety tips in the owner's manual that comes with your Homelite product. And don't forget to refer any questions about safety to your Homelite dealer.

410

This precision-balanced, professional chain saw is designed to provide exceptional handling, power and reliability with a rugged 4.1 cu. in. (67 cc) engine. It also features extremely low vibration and noise levels for greater comfort. Strategic placement of engine components allows easy maintenance, and its advanced carburetor delivers a smoother idle and better acceleration. **Standard Features:** ■ Power Tip® Gas-Welded and Sprocket Tip guide bars. ■ Vibration isolation. ■ CD ignition. ■ Automatic/manual oiling. ■ 3-shoe clutch. ■ Raker III® saw chain. ■ Rubber-coated handlebar. ■ SAFE-T-TIP® anti-kickback device. ■ Chain brake (opt.).



545

The unique engine design ensures hundreds of hours of trouble-free operation. The 545 delivers more power than you'd expect from such a lightweight package. Its carburetor is set away from direct engine heat to prevent vapor lock in hot weather; plus, the unique muffler design makes this one of the quietest chain saws in its class. **Standard Features:** ■ 5.43 cu. in. (89 cc) 2-cycle engine. ■ Automatic, adjustable oiling. ■ Chain speed of 3,940 feet per minute (1,202 m/min.) @ 9,000 RPM. ■ CD ignition ■ Softone™ muffler with spark arrestor. ■ Vibration-isolated for operator comfort. ■ SAFE-T-TIP® anti-kickback device. ■ Chain brake standard.



**SUPER
XL® 925**

The popular, time-tested dynamo with 4.7 cu. in. (77 cc) of real cutting and logging power. Its dependable 2-cycle engine is ideal for the heaviest, most strenuous cutting situations. **Standard Features:** ■ Gas-Welded, Power Tip® and Sprocket Tip guide bars. ■ Manual and automatic chain oiling system. ■ Throttle latch. ■ 3-shoe clutch. ■ Raker III® saw chain. ■ SAFE-T-TIP® anti-kickback device.




SUPER 1050

A workhorse known the world over for its combination of powerful engine torque and heavy-duty reliability. Specially designed for rugged, high production professional logging operations. **Standard Features:** ■ Gas-Welded guide bar. ■ 40 series chromed chain. ■ Manual and automatic chain oiling system. ■ All-weather ignition. ■ Bumper spike. ■ Throttle latch. ■ Rubber-coated handlebar. ■ SAFE-T-TIP® anti-kickback device.



CHAIN SAWS

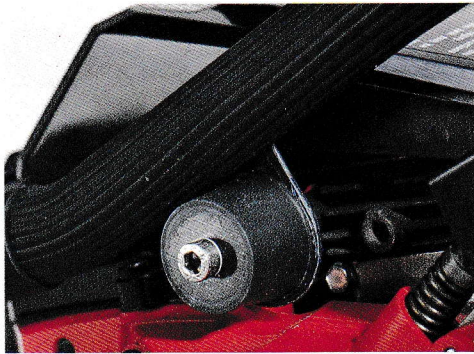

SELECT THE RIGHT FEATURES

While most Homelite® chain saws come with automatic oil pumps, it is sometimes preferable to have a manual oil pump override in order to add extra oil to the cutting operation; for instance, when cutting pulpy wood or wood containing a lot of sap. Homelite does offer selected saws

with a manual oil pump override. Check individual saw specifications.

A vibration isolation system increases comfort and reduces fatigue when you use your chain saw for extended periods. Most Homelite® chain saws are equipped with a vibration isolation system.

USER-FRIENDLY FEATURES ON MANY HOMELITE® GASOLINE-POWERED CHAIN SAWS:

- Homelite® 2-cycle engine features positive lubrication in all positions for high performance and long life.
- Squish chamber cylinder design for maximum power and smooth operation.
- Reusable air filter in an easily maintained, convenient location; can be cleaned and reused; keeps carburetor free of contaminants to extend engine life.
- All-weather solid-state ignition system provides increased performance, spark plug life and fuel economy, sure starting and less maintenance.
- Aluminum, plastic and magnesium die-cast construction provides strength and light weight.
- Automatic recoil starter allows easy starting.
- Raker III® low-kickback saw chain minimizes kickback.
- Rubber-coated handle grips increase operating comfort.
- A chain brake is optional on many chain saws.
- SAFE-T-TIP® anti-kickback device protects you and your saw.
- Easy-to-reach controls give you full control of the saw. Controls can be reached without removing your hand from handle.
- Chain automatically stops at idle.
- Softone™ dual-chamber muffler reduces the noise level—not the power level.
- Spark arrestor muffler meets State and Federal standards for fire safety.
- Automatic chain oiling system meters adequate chain oil for cutting ease, maximum chain life and economical use.

SELECTING THE PROPER GUIDE BAR LENGTH

The length of the guide bar around which the chain travels depends on two things: **1) the diameter of the wood you'll be cutting** and **2) the size of the saw you choose**. As a general rule, you choose a guide bar that is 2 in. (5 cm) longer than the diameter of the wood you'll be cutting.

Homelite® guide bars are designed to reduce friction and deliver increased performance to the cutting teeth. There are four types:

Gas-Welded Bar:

Features a special hardened nose for extra-long wear under tough cutting conditions.

Power Tip® Bar:

The sprocket nose reduces friction for increased cutting speed and power.

Sprocket Tip Bar:

This professional quality bar features

a replaceable low-friction sprocket nose assembly.


Hard Track Bar:

Economical, long-lasting steel bar with hardened rails.



YOUR CHAIN SAW ENGINE

Each Homelite® chain saw engine is carefully matched to the unit to meet the most demanding performance standards. Note these features of a typical Homelite® 2-cycle engine.

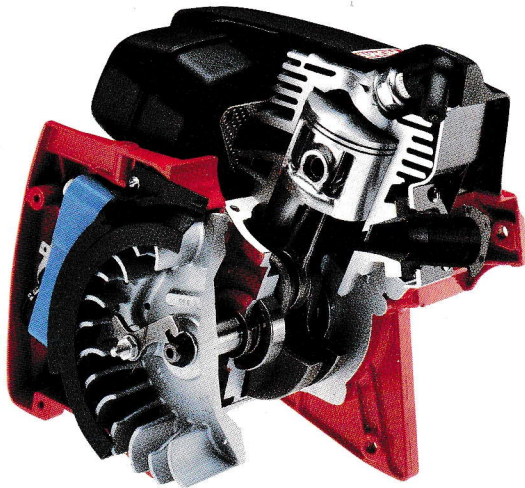

- **Reduced Noise.** Large two-chamber spark arresting muffler with exhaust silencers reduces exhaust noise significantly.
- **Long Life.** Forged alloy steel crankshaft is heat treated for strength and durability.
- **Peak Power.** Durable piston rings seal the combustion chamber, preventing blow-by for peak efficiency.
- **No Maintenance. No Moving Parts.** Self-contained, epoxy-encapsulated electronic ignition module has no moving parts and delivers high voltage for sure starts.
- **Smooth Operation.** Ball bearing crankshaft bearings reduce friction for smooth operation.
- **Reduced Friction.** Longer Ring Life. Exclusive process improves the durability of cylinder wall chrome-plating to virtually eliminate chrome wear.
- **Dichronite Coating.** This high-tech ultra-thin engine coating enhances the power and performance of critical engine parts during the initial break-in period.
- **Protected Against Wear.** Silverplated, caged connecting rod bearings assure greater durability for longer life.
- **Maximum Efficiency.** Electrolytic chromium-plated cylinder wall is specially treated to retain lubrication. Squish combustion chamber provides peak power with maximum fuel efficiency.
- **Cool Running.** Lightweight die-cast aluminum flywheel provides plenty of cool air for the engine.
- **Precision Engineered For Maximum Performance.** Cool running, cast aluminum piston is precise to within 5/10,000 of an inch.

CHAIN SAW SPECIFICATIONS

Model	UT No.	Bar Sizes in./cm.	Bar Type	Chain Series	Displacement cu.in./cc	Chain Oil Capacity oz./ml	Fuel Capacity oz./ml	Automatic Oiler	Powerhead Weight	Chain Brake
EL 12 (7 amp)	16000	12 (30)	Electra	37* Raker III®	N/A	4 (118)	N/A	No	4 lbs., 5 oz. (1.9 kg)	No
EL 14 (9 amp)	16001	14 (35)	Electra	37* Raker III®	N/A	4 (118)	N/A	No	6 lbs., 12 oz. (3 kg)	No
XL®	10694	10 to 16 (25 to 40)	HT, PT	37* Raker III®	1.8 (30)	6.1 (180)	8.5 (252)	Yes	7 lbs., 8 oz. (3.4 kg)	No
SUPER 2	10696	14 to 16 (35 to 40)	PT	37* Raker III®	2.0 (33)	6.1 (180)	8.5 (252)	Yes	7 lbs., 12 oz. (3.5 kg)	No
200	10690	10 to 16 (25 to 40)	HT, PT	37* Raker III®	2.0 (33)	6 (177)	8.5 (252)	Yes	8 lbs., 8 oz. (4 kg)	Yes
240	10625	16 to 18 (40 to 45)	PT	37* Raker III®	2.4 (39)	7.3 (215)	14.7 (435)	Yes	9 lbs., 12 oz. (4.4 kg)	Opt.
250	10681	16 to 20 (40 to 50)	PT, SP	.325** Chisel Raker III®	2.5 (40)	12.6 (378)	22.3 (659)	Yes	10 lbs., 8 oz. (4.9 kg)	Yes
300	10687	16 to 20 (40 to 50)	PT, SP	.325** Chisel Raker III®	3.0 (49.2)	12.2 (360)	22.3 (659)	Yes	11 lbs., 12 oz. (5.3 kg)	Yes
330	10604A	16 to 24 (40 to 60)	SP, GW, PT	38* Raker III®	3.3 (54)	8 (237)	16 (473)	Yes	12 lbs., 8 oz. (5.7 kg)	Opt.
360	10501A	16 to 24 (40 to 60)	PT, GW, SP	38* Raker III®	3.5 (57)	10.1 (299)	23.3 (689)	Yes	14 lbs., 13 oz. (6.7 kg)	Opt.
SUPER XL®	10045C	16 to 24 (40 to 60)	PT, GW, SP	38* Raker III®	3.5 (57)	5.0 (148)	24.2 (716)	Yes	13 lbs., 14 oz. (6.3 kg)	No
410	10486B	16 to 31 (40 to 78)	PT, GW, SP	38* Raker III®	4.1 (67)	12 (354)	24 (709)	Yes	16 lbs., 14 oz. (7.2 kg)	Opt.
545	10691 ^x 10692 ^{xx}	20 to 43 (50 to 109)	SP, GW	38 (.063) Series	5.43 (89)	18.3 (541)	31 (917)	Yes	16 lbs. (7.3 kg)	Yes
SUPER XL® 925	10415C	16 to 31 (40 to 78)	PT, GW, SP	38* Raker III®	4.7 (77)	12.2 (360)	7.7 (228)	Yes	17 lbs., 4 oz. (7.8 kg)	No
ER 1050	10139B	23 to 60 (58 to 152)	GW	40 Series	6.1 (100)	34.3 (1L)	49.3 (1.5L)	Yes	22 lbs., 10 oz. (10.3 kg)	No

^xFlush-cut handle.
^{xx}Wraparound handle.

NOTE: Specifications subject to change without notice.

*Raker III® Semi-Chisel
** .325 Raker III® Chisel

CHAIN SAW ACCESSORIES



As a manufacturer of quality chain saws, Homelite helps you maximize their performance and long life with a complete assortment of chain saw accessories.

A. File-N-Joint Tool

A fast, lightweight, precision tool that sharpens chain cutters and adjusts depth gauges.

B. Gas Cans

Available in 1 gal. (3.8 L) (A97536), 2½ gal. (9.4 L) (A97537) and 5 gal. (18.9 L) (A97538) sizes. Optional nozzle (A97539) for easy fueling.

C. Bar And Chain Oil

Assures longer wear and better cutting performance. Available in 1 quart and 1 gallon unbreakable vinyl plastic containers with screw-on caps*. Also available in 55 gal. (208 L) drums.

D. Metal Grease Gun

Ideal for lubricating guide bar and sprocket nose bearings, or, in some instances, clutch bearings. Refillable.

E. Plastic Grease Gun

A multipurpose gun for lubricating sprocket or roller nose guide bars and regular type grease fittings. Preloaded with lubricant and ready to use.

F. 2-Cycle Engine Oil

Formulated to be mixed with gasoline for lubricating 2-cycle engines at 32:1 or 16:1.

G. Combination Wrench

A screwdriver, spark plug wrench and bar nut wrench all in one.

H. Depth Gauge Jointer

.020 in. (.5 mm), .025 in. (.6 mm), .030 in. (.8 mm) and .035 in. (.9 mm). Accurately measures raker height for even cutting and proper chip clearance.

I. File Guide And File

To maintain correct filing angle of cutters. Provided with round file (3/16 in. - 4.7 mm, 5/32 in. - 4 mm or 7/32 in. - 5.5 mm) which is securely held in place with large wing nut and clamp.

J. Wedges

5 1/2 in. (13.7 cm), 8 in. (20 cm) and 10 in. (25 cm). Wedges take the weight off heavy cutting to avoid pinch and bind when felling and bucking.

K. Round File

Homelite® round files incorporate flat cutting spiral design for precise filing of cutters. Available in single and double packs, and in bulk (doz.) quantities of 1/8 in. (3.2 mm), 5/32 in. (4 mm), 3/16 in. (4.7 mm), 7/32 in. (5.5 mm) and 1/4 in. (6.3 mm) sizes.

L. Flat File

6 in. (15 cm). Tempered for hardness and long filing life.

M. Spark Plugs

Homelite® spark plugs are available for all models of Homelite® saws, as well as for a variety of other brands.

N. Bumper Spikes

Easily attach to your chain saw and provide a better "bite" and leverage into the wood.

*In Canada, comes packed in 241 ml and 4 L plastic containers.

NEW! Exact Mix™ 2-Cycle Engine Oil

This advanced-formula oil is specially developed to be mixed with gasoline for lubricating air-cooled 2-cycle engines. The exclusive bottle design has a built-in measuring chamber which allows you to quickly and easily pre-measure the exact amount of oil needed to mix with one gallon (3.8 L) of gasoline.




Saw Chain

Homelite® saw chain features pre-sharpened cutters for less drag, longer cutter life, smoother cutting and boring. Tempered-steel tie straps and drive links reduce stretch and add strength. Available in various loop sizes, gauges and pitches.



Carry Cases

Made of impact-resistant, high-density polyethylene for safe transport of chain saws. Cases are vacuum formed to withstand rugged use.

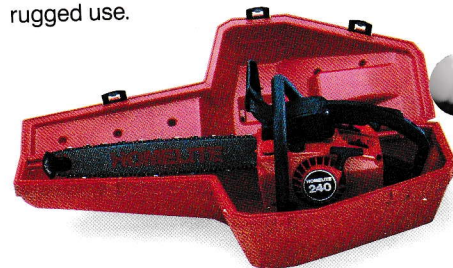



Over the past few years, the industry working with the Consumer Product Safety Commission has developed and published chain saw safety standards aimed at preventing kickback injuries and other types of injuries associated with chain saw usage. To this end, Homelite offers its Six Point Safety System aimed at maximizing the safe usage of your chain saw. This system meets the safety standard established by the American National Standards Institute (ANSI).

THE HOMELITE® SIX POINT SAFETY SYSTEM

PREVENTIVE



1. EXCLUSIVE SAFE-T-TIP® ANTI-KICKBACK DEVICE: The SAFE-T-TIP anti-kickback device completely prevents kickback injuries from happening. The SAFE-T-TIP device is standard on all Homelite® saws.



2. RAKER III® LOW-KICKBACK SAW CHAIN: Innovative three-raker design substantially reduces wide-angle kickback injuries compared to ordinary chain—WITHOUT SACRIFICING CUTTING ABILITY. Raker III chain is standard on all light and medium duty saws and many heavy duty saws.



3. OWNER'S EDUCATION: Covers Owners Manual, Warning Labels and Hang Tags affixed to products. A careful reading of this material is another effective way to reduce injuries due to kickback and other type injuries. Your Homelite dealer is also one more source where you can be educated on safe and proper cutting practices. **Owners Manual, warning, etc. are standard with all Homelite saws.**

PROTECTIVE

4. CHAIN BRAKE: When activated by the left hand, the chain brake is intended to reduce wide-angle injuries from kickback by stopping a moving chain. The chain brake enables you to lock the chain when carrying a saw from one location to another. Chain brakes are available on many saws.

5. FRONT HANDGUARD: Handguards are standard on all chain saws. The front handguard is designed to protect you in the event your left hand slips while operating a chain saw. The incidence of hand and arm injuries has been reduced significantly since this device was introduced.

6. VIBRATION ISOLATION: A series of isolators (cushions) are used in the design of a saw to isolate the cutting attachments from the engine. They are located at critical vibration areas on the saw and act as springs to reduce transmitted vibration. This increases your comfort and reduces fatigue. This feature is available as a standard item on some saws.

Other Homelite® safety products include: goggles, safety hat, ear protectors and face shield.

WARNING:
Kickback will occur when the chain takes too large a cut while rounding the top part of the bar near the tip. The chain can stop, instantaneously, causing the chain saw to pinwheel back in an arc toward the operator.

WALK-BEHIND MOWERS

SAVE WORK, SAVE MONEY, SAVE THE ENVIRONMENT


The new Homelite® Twin Blade Mulching Mower has two blades with six cutting surfaces, set in an extra deep deck for double-cutting mulching action. As you mow, this mulching action cuts grass and leaves into a fine-particle mulch and blows the tiny particles down into the lawn. In a short time they decompose and return vital nutrients to the soil. As a result, your lawn requires less commercial fertilizer and less water. And this extraordinary mulcher-mower minimizes the need for periodic thatch removal.

- Available in a 20 inch cut model—push or power-propelled and electric start.
- Comes completely assembled in carton.

WHY MULCH?

A mulching mower utilizes a multi-pitch, multi-stage blade and a dome-like shaped deck. This unique design allows air suction to lift the grass upright to be cut and recut into fine particles. These particles are then forced back into the turf near the soil level.

Mulching returns the clippings to the soil, where they decompose within 14 days. This returns the valuable nutrients to the soil giving you a healthier lawn. Mulching also reduces the evaporation of water from the soil.

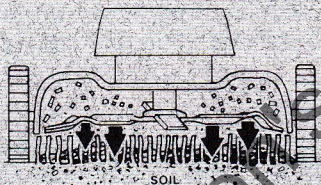

LIGHTWEIGHT RUSTPROOF ALUMINUM DIE-CAST DECK

All Homelite® walk-behind mowers (i.e., mulcher, rear baggers and convertibles) feature a lightweight, die-cast aluminum deck which we make ourselves to ensure consistent high quality. It's cast into a single piece of rust-proof aluminum to maximize aerodynamic performance.

Our decks are about 30% lighter than competitive mulching mower steel decks (less weight to maneuver around). The deck also features a super hard powder-painted surface for a lifetime of use.


Why Use A Mulching Mower? By recycling lawn waste at home, you can save time and money, improve your grass and **protect the environment.**

Easy Adjustments for Cutting Heights.

Quick-change five position wheel and adjusters provide cutting heights from 1 to 3 inches.

Sure-Footed Traction. Large wheels with rubber tires for excellent maneuverability.

Creates Suction for Fine Mulching. The dual blades double-cut and mulch grass into fine particles.

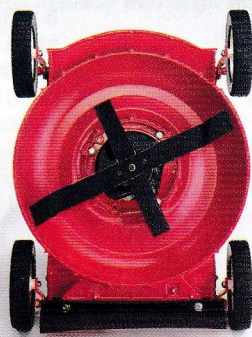

Two blades with six cutting surfaces are set in an extra deep rustproof aluminum deck for double-cutting mulching action.

Tough, Long-Lasting Handles and Deck. Powder-paint finish on deck and handles for a tough, durable finish.

Easy, Comfortable Handling. Three-position, full folding handles adjust to your height.

Lightweight and Easy To Push. At 60 pounds this unit is easy to maneuver. Power-propelled model weighs 66 lbs. Electric start model: 75 lbs.

Quiet, Strong and Durable. The 3.5 HP 180cc QUANTUM provides reliable performance.

2 YEAR
LIMITED WARRANTY
3 YR. ON GEAR-DRIVE
TRANSAXLE
MADE IN THE USA

LIFETIME GUARANTEE!

The all-aluminum deck **cannot** and **will not rust** through a lifetime of regular use.

Mulching Mower

- No more raking
- No more bagging
- No more clippings.

ooth, Power-
riffs & Strat-
TUM engine
ugged, reli-
-mance.

Rustproof, Longer Life Deck. Aerodynamic aluminum extra deep die-cast deck is rustproof.



Specially engineered for Homelite! The Briggs & Stratton Quantum engine has been custom built for Homelite® walk-behind lawn mowers.



HM20P5



HM20P5E



**HM20
PUSH MOWER**

The HM20 mulching mower features the latest in engine technology—the lightweight 4 HP *Quantum* engine—is extremely quiet, cool running and easy-starting. Its aerodynamic aluminum extra deep die-cast deck is lightweight and rustproof. And its dual blades double-cut and mulch grass into fine particles for even dispersal back into the lawn. This push mower weighs 60 pounds and is easy to maneuver.

**HM20P5
POWER-PROPELLED
MOWER**

Our power-propelled mulcher features a 5 HP *Quantum* engine for those larger lawns. Other features include a rustproof die-cast aluminum deck, dual blades for fine mulching of grass, three-position full folding handles and quick-change five position wheel adjusters.

Note: Mower specifications appear on page 32.

**HM20P5E
POWER-PROPELLED MOWER
ELECTRIC START**

This instant start mulching mower features a 5 HP *Quantum* engine, electric start and a convenient backup rewind starter. This top-of-the-line model has an environmentally safe powder-paint finish, quick change five position wheel adjusters (from 1 to 3 inches), and large 8 inch wheels (more maneuverable).

Leon's Chainsaw Parts & Repairs

WALK-BEHIND MOWERS

MULTI-SPEEDS TO MATCH YOUR MOWING STYLE

The Homelite® 3-speed rear bagger self-propelled mowers are the ultimate "cutting machines." Their new high-vacuum deck design stands grass up for a cut that is smooth and one that adds a manicured look to a lawn. A three speed gear-drive transaxle provides the maximum in multi-speed options so that the perfect operating speed can be selected. And a dependable, 5 HP high-torque *Quantum* engine, especially engineered for Homelite by Briggs & Stratton, provides the muscle to take on the big mowing jobs.


FEATURES:

- **Lightweight Aluminum Rustproof Deck**—Will not rust through a lifetime of use.
- **Deep Deck Design Improves Airflow**—Up to 45% at its lowest deck height setting. Airflow is increased at all settings.
- **3-Speed Gear-Drive Transaxle**—Features multi-speed settings and "no-jerk" shift-as-you-mow operation.
- **Big 3-bushel Rear Grass Catcher**—The largest capacity rear bag in the industry.
- **Fully Assembled In Carton**—Open carton, unfold handle, tighten two wing nuts, add gas and oil... then mow the lawn.

3-SPEED GEAR-DRIVE TRANSAXLE

This reliable gear drive lets you match mowing speed to your particular walking pace. Also the mowing conditions of your property (i.e., hills, trees, shrubbery, open spaces, etc.) will dictate your choice of mowing speed. The shift lever is conveniently located within the operator's reach. It features a smooth engaging cone-clutch mechanism for "no-jerk" shift-as-you-mow operation.

Its powder metal gears are designed to stand up under heavy loads giving the unit longer life and rugged durability.

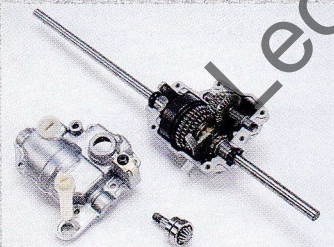

HSB21P5CG POWER-PROPELLED 4-CYCLE ENGINE BLADE/BRAKE/CLUTCH

This 5 HP rear bagger power-propelled mower has a blade/brake/clutch (BBC). This allows the blade to stop in three seconds after the control bar is released, but the engine keeps running (i.e., no need to restart engine to continue mowing operation). The unit also has all the other feature/benefits as outlined on model HSB21P5G.



Tough, Long-Lasting Handles. Powder-painted handles resist scratches and rust to look good and last longer.

MOWER GROUND SPEEDS

High Range-Speeds MPH (km/h)	Low Range-Speeds MPH (km/h)
1. 2.0 (3.2)	1. 1.8 (2.9)
2. 2.6 (4.2)	2. 2.3 (3.7)
3. 3.2 (5.1)	3. 2.9 (4.7)

The Homelite® 3-speed gear drive transaxle provides 6 distinct speeds in two speed ranges via a manually adjusted 2 speed pulley.

Easy-On, Easy-Off Emptying. L-handles and push-button latch make it easy to remove and empty the 3-bushel rear grass catcher.

3-Speed Gear-drive Transaxle. Provides three speeds for shift-as-you-mow operation.

Lifts Grass For Even Cutting. The 21 in. high-lift blade lifts grass tall and straight for clean and even

HSB21P5CG



De
Alu
imp
effi

WALK-BEHIND MOWERS

THE RECOGNIZED NAME FOR RUGGED DEPENDABILITY.

The Homelite® walk-behind lawn mower line is living up to its famous name in performance and practicality. Each of these rugged, dependable mowers gives you the power you need and the convenience you appreciate.

FEATURES INCLUDE:

- Rustproof aerodynamic aluminum die-cast deck.
- Vacuum action wind tunnel deck and 21 inch high-lift blade lifts and cuts grass clean and even.
- Big 3-bushel bag is the largest in the industry.
- Powerful 4 or 5 HP 4-cycle or 4 HP 2-cycle engines for those big jobs.
- All mowers have side-discharge capability (side-discharge chute is optional).

HSB21 PUSH MOWER 4-CYCLE ENGINE

This economical push mower delivers durability and dependability. A rugged 4 HP, 4-cycle engine coupled with a high-vacuum deck and rear grass bagging gives your lawn the manicured look you want. A side-discharge chute is optional.



2 YEAR
LIMITED WARRANTY
3 YR. ON GEAR-DRIVE
TRANSAXLE
MADE IN THE USA

Note: Mower specifications appear on page 32.

Tough, Long-Lasting Handles. Powder painted handles resist scratches and rust to look good and last longer.

Easy Adjustments for Working Comfort. Three-position handle-bar, adjustment lets you set the height most comfortable for you.

Easy-On, Easy-Off Emptying. L-handles and push-button latch make it easy to remove and empty the 3-bushel rear bag.

Rear-Wheel Drive Improves Traction. Rear wheel drive means traction improves as bag fills.*

Lifts Grass For Even Cutting. The 21 in. high-lift blade lifts grass tall and straight to cut it clean and even.

*On power-propelled models only.

**RUSTPROOF
ALUMINUM
DIE-CAST
DECK**



HSB21P4

HSB21

20% MORE POWER*

*The 30 cc units have 20% more power than units equipped with 25 cc engines.



These units feature the Homelite® 30 cc and 40 cc 2-cycle engine.

HBC-30

This string trimmer/brushcutter unit has an 18 inch cutting swath with dual-line head. Its straight shaft design allows you to trim in those hard-to-get-to places. **Standard Features:**

- Quick start primer bulb for easy starts.
- Homelite® new design 30 cc 2-cycle engine.
- E-Z-Line™ Advance System.
- Dual-line 18 in. (45 cm) cutting swath.
- Heavy-duty .095 (2.4 mm) gauge line.
- Adjustable D-type handle with comfort grip.
- Centrifugal clutch stops trimmer without stopping engine.
- 8 in. (20 cm) Tri-Arc™ blade, 7 in. (18 cm) Machete™ Blade and 8 in. (20 cm) saw blade, and comfort strap (optional).




30 cc

HBC-30B

A straight shaft string trimmer/brushcutter that is a rugged workhorse for those heavy jobs. Its 18 inch wide cutting swath and dual-line head make jobs easy to handle. **Standard Features:**

- Quick start primer bulb for easy starts.
- Homelite® new design 30 cc 2-cycle engine.
- Dual-line 18 in. (45 cm) cutting swath.
- E-Z-Line™ Advance System.
- Adjustable nordic-type handle.
- Centrifugal clutch stops trimmer without stopping engine.
- Comfort strap.
- 8 in. (20 cm) Tri-Arc™ blade, 7 in. (18 cm) Machete™ blade, and 8 in. (20 cm) saw blade (optional).

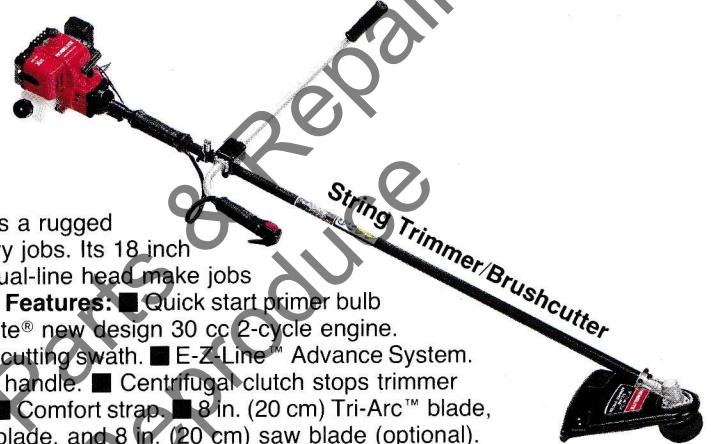

HBC-38

The HBC-38 is designed to meet the needs of the hard-working professional. It slices down tall grass and weeds and easily handles brush and small saplings. **Standard Features:**

- Quick start primer bulb for easy starts.
- Powerful 40 cc 2-cycle engine.
- Dual-line 18 in. (45 cm) cutting swath.
- Heavy-duty .105 (2.7 mm) gauge line.
- Manual line advance system.
- Centrifugal clutch stops trimmer without stopping the engine.
- Adjustable bicycle-type handle.
- Special carrying harness.
- Straight shaft for plenty of reach and maneuverability.
- Guarded muffler meets all U.S. and European requirements.
- 10 in. (25 cm) saw and brush blade (optional).



Heavy Duty

40 cc

HBC-40

The HBC-40 is tough and durable and it packs a punch with its large 40 cc engine. This unit can easily handle saplings up to 5 in. (7 cm) in diameter and can cut the toughest brush in a hurry.

Standard Features:

- Quick start primer bulb for easy starts.
- Powerful 40 cc 2-cycle engine.
- Vibration isolated.
- Dual-line 20 in. (50 cm) cutting swath.
- Heavy-duty .105 (2.7 mm) gauge line.
- Centrifugal clutch stops trimmer without stopping the engine.
- Manual line advance system.
- Adjustable Nordic-type handle.
- Guarded muffler meets all U.S. and European guidelines.
- Comes with 10 in. (25 cm) Tri-Arc™ blade.
- Optional 10 in. (25 cm) saw blade.



HBC-18	HBC-30	HBC-30B	HBC-38	HBC-40
15075	15071	15072	15077	15069
30 cc	30 cc	30 cc	40 cc	40 cc
Dual 18 (45)	Dual 18 (45)	Dual 18 (45)	Dual 18 (45)	Dual 20 (50)
Curved (Flex)	Straight (Rigid)	Straight (Rigid)	Straight (Rigid)	Straight (Rigid)
E-Z-Line™	E-Z-Line™	E-Z-Line™	Manual	Manual
Yes	Yes	Yes	Yes	Yes
J-Handle	D-Handle	Nordic	Bicycle	Nordic
Metal	Metal	Metal	Metal 100°	Metal 100°
70-90	70-90	70-90	45-60	45-60
.095 (2.4)	.095 (2.4)	.095 (2.4)	.105 (2.7)	.105 (2.7)
13½ (6.1)	13 (5.8)	14½ (6.6)	16 (7.3)	18 (8.2)



HSB21P5

Mow At Your Pace.
Two manual speed settings let you adjust the mowing speed to your walking pace.

Easy Oil Check. Top-mounted oil dipstick makes checking, filling and draining a snap.

Longer Wear, Optimum Performance. Special oil system ensures that all bearings and engine parts are thoroughly lubricated for longer life and increased performance.

Quiet, Smooth, Powerful. The Briggs & Stratton Quantum engine provides rugged, reliable performance.



HSB21P4-2



SIDE-DISCHARGE CHUTE

A lightweight, high-strength side-discharge chute is available for your rear bag mower. Many lawn services advise you not to bag grass immediately after lawn treatment.

**HSB21P4 & HSB21P5
POWER-PROPELLED MOWERS
4-CYCLE ENGINES**

These powerful mowers are great for the tough jobs. With 4 or 5 HP, 4-cycle Briggs and Stratton Quantum engines, they adapt to varying cutting conditions with adjustable cutting heights, from 1 to 3 in. (2.5 to 7.6 cm). The units high-vacuum cutting system lifts grass, cuts it evenly and blows it into the large, reinforced 3 bushel (105 L) rear grass catcher. A side-discharge chute is optional.

**HSB21P4-2 & HSB21-2
POWER-PROPELLED OR PUSH
2-CYCLE ENGINES**

These mowers are a 4 HP two-cycle version of the HSB series of mowers. Two-cycle power is especially advantageous for those who mow their grass mainly on steep slopes or uneven terrain, or who prefer two-cycle operation. These two-cycle engines feature a cast iron cylinder liner and a triple-element air filter for long engine life.

THE 2-CYCLE I-C ENGINE

This engine sets a new standard in two-cycle lawn mower engine performance as the most powerful engine in its class. ■ Handles the heaviest mowing conditions with 30% more torque at a low 2400 rpm. ■ Easy one-pull starting with less effort, thanks to advanced carburetor design and solid-state Magnetron ignition. ■ Big 2 qt. (1.9 L) fuel tank lets you mow up to 2 hrs. between fills. ■ Surpasses tough international standards for quiet operation with a big 47 cu. in. (780 cc) muffler.



Sure-Footed Traction.
Large 8" wheels with rubber tires provide sure footing and maneuverability over any terrain.

WALK-BEHIND MOWERS

HOMELITE® WALK-BEHIND MOWER SPECIFICATIONS

Model	UT No.	Drive Type	Cutting Width in. (cm)	Engine	HP	Cutting Height Adj. in. (cm)	Rear Catcher bu. (L)	Fuel Capacity qts. (L)	Solid-State Ignition	Controls	Wheels in. (cm)	Unit Weight lbs. (kg)
Walk-Behind Mulching Mowers:												
HM20	30139	Push	20 (50)	B&S <i>Quantum</i> 4-cycle	4.0	1-3 (2.5-7.6)	NA	1.5 (1.4)	Yes	Zone Start	8 (20)	60 (27)
HM20P5	30153	Power-propelled	20 (50)	B&S <i>Quantum</i> 4-cycle	5.0	1-3 (2.5-7.6)	NA	1.5 (1.4)	Yes	Zone Start	8 (20)	66 (30)
HM20P5E	30160	Power-propelled	20 (50)	B&S <i>Quantum</i> 4-cycle	5.0	1-3 (2.5-7.6)	NA	1.5 (1.4)	Yes	Push Button Elec. Start	8 (20)	75 (34)
3-Speed Walk-Behind Mowers (Rear Bagging):												
HSB21P5G	30140	Power-propelled	21 (53)	B&S <i>Quantum</i> 4-cycle	5.0	1-3 (2.5-7.6)	3 (105)	1.5 (1.4)	Yes	Zone Start	8 (20)	76 (35)
HSB21P5CG	30161	Power-propelled	21 (53)	B&S <i>Quantum</i> 4-cycle	5.0	1-3 (2.5-7.6)	3 (105)	1.5 (1.4)	Yes	Blade/Brake/Clutch	8 (20)	85 (38)
HSB21P5EG	30162	Power-propelled	21 (53)	B&S <i>Quantum</i> 4-cycle	5.0	1-3 (2.5-7.6)	3 (105)	1.5 (1.4)	Yes	Push Button Elec. Start	8 (20)	87 (39)
Rear Bagging Walk-Behind Mowers:												
HSB21	30147	Push	21 (53)	B&S <i>Quantum</i> 4-cycle	4.0	1-3 (2.5-7.6)	3 (105)	1.5 (1.4)	Yes	Zone Start	8 (20)	65 (29)
HSB21P4	30148	Power-propelled	21 (53)	B&S <i>Quantum</i> 4-cycle	4.0	1-3 (2.5-7.6)	3 (105)	1.5 (1.4)	Yes	Zone Start	8 (20)	72 (33)
HSB21P5	30155	Power-propelled	21 (53)	B&S <i>Quantum</i> 4-cycle	5.0	1-3 (2.5-7.6)	3 (105)	1.5 (1.4)	Yes	Zone Start	8 (20)	72 (33)
HSB21-2	30146	Push	21 (53)	B&S I/C 2-cycle	4.0	1-3 (2.5-7.6)	3 (105)	2 (1.9)	Yes	Zone Start	8 (20)	66 (30)
HSB21P4-2	30145	Power-propelled	21 (53)	B&S I/C 2-cycle	4.0	1-3 (2.5-7.6)	3 (105)	2 (1.9)	Yes	Zone Start	8 (20)	72 (33)
Side-Discharge Walk-Behind Mowers:												
HSD20	30151	Push	20 (50)	B&S <i>Quantum</i> 4-cycle	3.5	1½-3½ (3.8-8.9)	2¼ (79) Opt.	1.5 (1.4)	Yes	Zone Start	8 (20)	53 (24)
HSD20P	30152	Power-propelled	20 (50)	B&S <i>Quantum</i> 4-cycle	3.5	1½-3½ (3.8-8.9)	2¼ (79) Opt.	1.5 (1.4)	Yes	Zone Start	8 (20)	59 (27)
HSD20V	30141	Push	20 (50)	B&S <i>Sprint</i> 4-cycle	3.5	1½-3½ (3.8-8.9)	2¼ (79) Opt.	1.5 (1.4)	Yes	Zone Start	8 (20)	53 (24)
HSD20-2	30142	Push	20 (50)	Tecumseh 2-cycle	4.0	1½-3½ (3.8-8.9)	2¼ (79) Opt.	1.5 (1.4)	Yes	Zone Start	8 (20)	52 (23)
HSD20P-2	30143	Power-propelled	20 (50)	Tecumseh 2-cycle	4.0	1½-3½ (3.8-8.9)	2¼ (79) Opt.	1.5 (1.4)	Yes	Zone Start	8 (20)	58 (26)
HSC20-2	30144	Push	20 (50)	B&S I/C 2-cycle	4.0	1½-3½ (3.8-8.9)	2¼ (79) Opt.	2 (1.9)	Yes	Zone Start	8 (20)	57 (25)
HE20	30092	Push	20 (50)	B&S Electric 1000 Watt	N/A	1½-3½ (3.8-8.9)	1½ (53) Opt.	N/A	N/A	Zone Start	8 (20)	46 (21)

ATTACHMENTS AND REPLACEMENT PARTS FOR SIDE-DISCHARGE MOWERS

Part No.	Description	Part No.	Description
JA-994262	2¼ bu. (79 L) rear bag kit (includes adapter)	JA-994264	1½ bu. (53 L) rear bag kit (Model HE20)
JA-994208	Replacement grass bag only	JA-994209	Replacement bag only — HE20
JA-392422	Replacement blade	JA-993780	Mulcher Kit

ATTACHMENTS AND REPLACEMENT PARTS FOR REAR BAGGER MOWERS

Part No.	Description	Part No.	Description
JA-993845	Side-discharge chute	JA-991189	Replacement blade (HSB21P5C)
JA-992108	Battery charger kit	JA-992766	Replacement blade (HSB21P4, HSB21P5, HSB21P5E, HSB21, HSB21-2, HSB21P4-2)
JA-518759	3 bu. (106 L) replacement grass bag		

WALK-BEHIND LAWN MOWER SAFETY SYSTEM.

Homelite® walk-behind lawn mowers meet or exceed all Consumer Product Safety Commission (CPSC) safety standards. These stringent standards are met with these three innovative mower control options:

Zone Restart. The blade and engine stop within three seconds after the control bar is released. To restart, hold the control bar down and pull the starter rope conveniently located at operator level.



Blade/Brake/Clutch (BBC). When the control bar is released, the blade stops within three seconds, but the engine keeps running. There is no need to restart the engine to resume mowing.



Push-Button Electric Start. The blade and engine stop within three seconds after the control bar is released. A simple push of the conveniently located electric start button quickly restarts the mower.



2 YEAR
LIMITED WARRANTY
 3 YR. ON GEAR-DRIVE
 TRANSAXLE
MADE IN THE USA



HSB21P5EG

Easy Oil Check. Top-mounted oil dipstick makes checking, filling and draining a snap.

Quiet, Smooth, Powerful. The Briggs & Stratton Quantum engine for rugged, reliable performance.

Sure-Footed Traction. Large 8" wheels with rubber tires provide sure footing and maneuverability over any terrain.




HSB21P5G

Deep-Deck Design
Aluminum Deck. For improved bagging efficiency.

**IMPROVED DECK!
 IMPROVED AIR FLOW!**

The models featured on this page feature the Homelite new deep deck design that improves air flow at all mower deck height settings—up to forty-five percent on the lowest setting. The unique wind-tunnel designed deck, high-lift blade and wide-mouth 3-bushel rear grass catcher gives you the finest cutting/bagging unit on the market today.

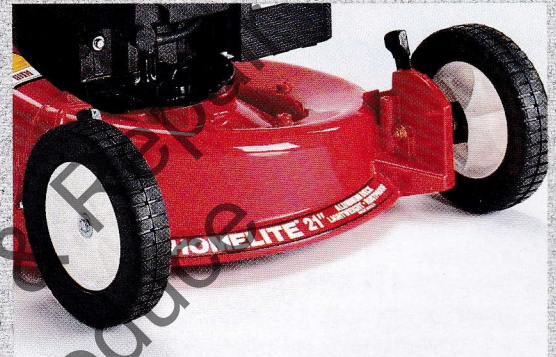

**HSB21P5G
 POWER-PROPELLED
 4-CYCLE ENGINE**


This is the "big daddy" of our line of walk-behind mowers. The powerful 5 HP unit is designed to make the job go faster and easier... giving you more leisure time. From its easy start engine, 3-speed transmission, deep-deck design, and rear bagger or optional side-discharge capability this is the "performance mower" of the 90's.

**HSB21P5EG
 POWER-PROPELLED
 4-CYCLE ENGINE
 ELECTRIC START**

The ultimate in easy-start and easy-to-use mowing... featuring an on-board electric start system. Starting is simply just the push of a button. A powerful 5 HP Quantum engine and alternator charge its 12-volt battery. A back-up rope starter is provided for sure starting reliability.

FULLY ASSEMBLED IN CARTON!


All 3-speed units come fully assembled in the carton. Just unfold the handles, tighten two wing nuts, add oil and gas, position the bag and you're ready to mow. A new design lower handle assembly allows the unit to fold down easily for storage and transportation.

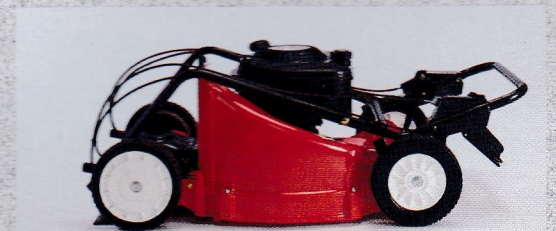



E300HD EDGER

The Homelite E300HD is an easy to use high performance edger unit. It has an ergonomically designed bowed handle for comfort and ease of operation. A wide front wheel provides stability and balance. Depth control can be adjusted from the operator position. And a fully guarded belt drive provides for safer operation.

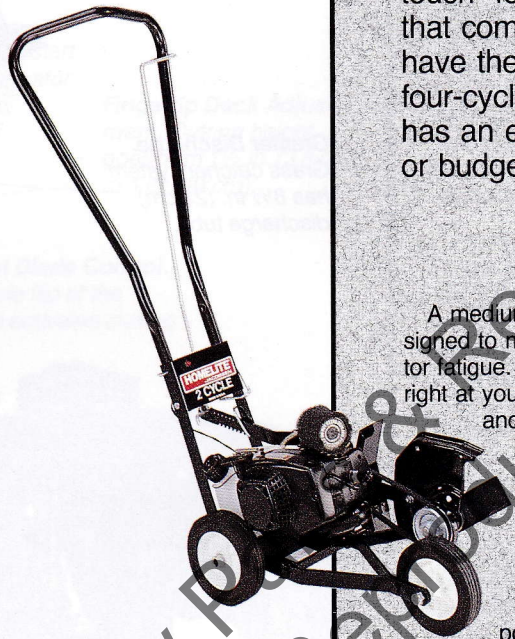

E150-2 EDGER 2-CYCLE POWER

A medium duty unit that is ergonomically designed to maximize control and minimize operator fatigue. Cutterhead depth controls are located right at your fingertips for easier access and greater safety. **Standard Features:**

- Tough 32.8 cc, 2-cycle Tecumseh engine.
- Remote depth control (multiple increments up to 2¾ in.) can be adjusted from operator position.
- Dual cutting edge 9 in. blade with blade disengagement lever.
- Folding handles for storage and transport.
- Belt drive for lifetime of rugged use.
- Comes fully assembled in carton.
- Unit has two-year warranty but cutterhead bearing and shaft assembly has a five year warranty.



E300HD EDGER 4-CYCLE POWER

This heavy duty edger gives you all the root-busting, weed-eating, job-handling power you need to get the job done right . . . every time. The extra heavy duty welded steel frame, is especially designed for the toughest commercial applications. Its foot-operated blade clutch—located

- well back of the business end of the machine—has been designed for easy use and maximum safety. **Standard Features:**
- Powerful Briggs & Stratton 3 HP gas engine (3,950 RPM).
 - Adjustable four-position cutter head for bevel cut in either direction.
 - Wide front wheel (2¾ in.) for better stability and maneuverability.
 - Dual cutting edge 9 in. star blade has four cutting edges for faster, smoother cuts.
 - Fingertip cutterhead depth control up to 2¼ in.
 - Belt drive for long life.
 - Unit has two-year warranty but cutterhead bearing and shaft assembly has a five year warranty.

HOMELITE® EDGER SPECIFICATIONS

Model	E150-2	E300HD
UT No.	22085	22086
Engine	Tecumseh 32.8 cc	Briggs & Stratton 3 HP
Starter	Recoil	Recoil
Depth of Cut (cm)	2¾ (7)	2¼ (5.7)
Blade RPM	3,850	3,950
Blade Size in. (cm)	9 (23)	9 (23)
Belt Drive	Yes	Yes
Shipping Weight Lbs. (kg)	31 (14)	69 (31)

2 YEAR
LIMITED WARRANTY

RIDING MOWERS

CHOOSE THE ONE THAT'S RIGHT FOR YOU

RUGGED UNITS

Homelite® riding mowers really perform for you with wide 30½ in. (77 cm) cutting blades which get the big jobs done in a hurry. These mowers are powered by extra-heavy duty Briggs & Stratton engines for years of dependable operation. All engines have 3 qt. (28 L) fuel capacity.

SUPERIOR REAR BAGGING CAPABILITY

When you choose the optional 7 bu. (246 L) twin bagger, you take full advantage of our exclusive turbo-vent engineering which ensures that the bags fill completely. The twin bagger is easy and lighter to empty. In fact, 30 gal. (113 L) trash bags can be used to make emptying even easier.

TWIN BLADE MULCHING KIT

Conversion of your riding mower deck to a mulching mode is simple and easy. With a special optional twin blade mulching kit (includes special twin cutting blades, side-discharge cover plate, wing nuts and bolts) you can convert your present deck to a mulching deck (initial installation requires tools to install blades).

The advantages of mulching are many (no bagging, no raking, no more clippings) and you contribute to healthy growth of your lawn while making a contribution to the environment by recycling what would be waste product.



The mulching kit utilizes a multi-pitch, multi-stage blade and dome-like shaped deck. The unique design allows air suction to lift the grass upright to be cut and recut into fine particles. These particles are then forced back into the turf near the soil level.

Big Capacity. Unique bagging system holds a big 7 bushels of clippings.

Greater Discharge. Grass catcher system has 8½ in. (21 cm) discharge tube.



Powerful I/C Engine (10 & 12 HP units)

The Briggs & Stratton I/C engine has a 12-volt electric start with tri-circuit alternator. Its large air cleaner employs automotive-type double filtering to run cleaner and longer between maintenance checks. Its **Magnetron** electronic ignition has no moving parts to fail. The low vibration and Super Lo-Tone muffler assure quiet, comfortable operation.

RE830E W/TWIN BAGGER

5 Speed Capability. Special transmission has the right range of power for any mowing situation.

Dual Discharge. Pivoting chute allows easy changeover between bagging and side-discharge.

2 YEAR LIMITED WARRANTY
MADE IN THE USA

Model	UT No.	Engine	Steering	Transmission Speeds @ 3600 rpm	Tires	Clutch
RE830	32003	Briggs & Stratton Synchron-balanced 8 HP	Rack and Pinion Pivoting Front Axle	(5 speed) Fwd - 0-5 mph (0-8 Km/h) Rev - 1.5 mph (2.7 Km/h)	Front-Tubes 11 X 4.00-5 Turf Rear-Tubeless 16 X 6.50-8 Turf	Electric Clutch for Blade Engagement
RE830E	32034	Briggs & Stratton Synchron-balanced 8 HP	Rack and Pinion Pivoting Front Axle	(5 speed) Fwd - 0-5 mph (0-8 Km/h) Rev - 1.5 mph (2.7 Km/h)	Front-Tubes 11 X 4.00-5 Turf Rear-Tubeless 16 X 6.50-8 Turf	Electric Clutch for Blade Engagement
RE1030E	32035	Briggs & Stratton Synchron-balanced Cast Iron Sleeve 10 HP (I/C)	Rack and Pinion Pivoting Front Axle	(5 speed) Fwd - 0-5 mph (0-8 Km/h) Rev - 1.5 mph (2.7 Km/h)	Front-Tubes 11 X 4.00-5 Turf Rear-Tubeless 16 X 6.50-8 Turf	Electric Clutch for Blade Engagement
RE1230E	32036	Briggs & Stratton Synchron-balanced Cast Iron Sleeve 12 HP (I/C)	Rack and Pinion Pivoting Front Axle	(5 speed) Fwd - 0-5 mph (0-8 Km/h) Rev - 1.5 mph (2.7 Km/h)	Front-Tubes 11 X 4.00-5 Turf Rear-Tubeless 16 X 6.50-8 Turf	Electric Clutch for Blade Engagement

Three Powerful Engines. Briggs & Stratton, 8, 10 or 12 HP engines deliver the muscle you need.

More Comfort. Vinyl-covered, foam rubber seat gives more comfort and support.

Automotive-Type Steering. Rack and pinion steering provides precise control.

Fast Starts. Electric start with on-board alternator means immediate, reliable starts.

Fingertip Deck Adjustment. Cutting height goes from 1½ in. (3.8 cm) to 4 in. (10 cm).

Instant Blade Control. A simple flip of the switch activates cutting blade.

Problem-Free Tires. Inner tubes in front tires maximize performance.

Adjusts To Terrain. Pivoting front axle provides driving stability.

Advanced Deck Design. 13-gauge semi-torus steel deck is strong, durable and provides the ultimate in suction power.

Smooth Takeoffs and Quick, Smooth Stopping. Gas cylinder clutch provides smooth starting. Disc brakes assure quick stops.



RE830

This economical 8 HP version of the RE1230E sports the same performance features combined with an 8 HP synchro-balanced Briggs & Stratton engine. The solid-state ignition assures reliable 1 to 3 pull starting.

RE830E

The HR830E gives you the performance of the HR830 plus a dependable 12-volt start system with dual circuit alternator. The recoil-start backup offers dependable 1 to 3 pull/start capability.

RE1030E

For those seeking more than 8 HP but who don't need as much as 12, this is your riding mower. The electric start gets you going instantly; plus, all the quality, convenience and performance features are here with a midsize 10 HP Briggs & Stratton I/C engine providing dependable, long-lasting power.

RE1230E

This powerful workhorse takes on the big lawns with ease. The solid-state electronic ignition ensures immediate start-up. Its heavy-duty Briggs & Stratton Industrial/Commercial engine is built for a long life of hard work with a cast iron cylinder liner, hardened valves, rotators and valve seats. The big 30½ in. (77 cm) cutting deck is 15% stronger than previous designs. In addition, the cutting deck is a semi-torus design which allows more uniform and consistent lift for clean, effective bagging.

REPLACEMENT PARTS


Part No.	Description
JA-991661	Replacement blade
JA-991658	Sand blade
JA-991659	Replacement high-lift blade
JA-991142	Tow hitch

NOTE: For easy service and storage the unit can be stood on end by using optional stand-up tubes or by using grass catcher mounting tools for it.

Turning Radius in. (cm)	Deck Height in. (cm)	Cutting Width in. (cm)	Dimensions in. (cm)	Shipping Weight lbs. (kg)
30 (76)	1½ X 4 (3.8-10) Adj. 6 positions	30½ (77)	L 61½ (156) W 33¾ (86) H 36 (91)	388 (176)
30 (76)	1½ X 4 (3.8-10) Adj. 6 positions	30½ (77)	L 61½ (156) W 33¾ (86) H 36 (91)	406 (184)
30 (76)	1½ X 4 (3.8-10) Adj. 6 positions	30½ (77)	L 61½ (156) W 33¾ (86) H 36 (91)	412 (187)
30 (76)	1½ X 4 (3.8-10) Adj. 6 positions	30½ (77)	L 61½ (156) W 33¾ (86) H 36 (91)	418 (190)


Superior Deck and Grass Bagging System (up to four times faster.*)

Large discharge tube and rear bag collector provide excellent grass bagging capability.

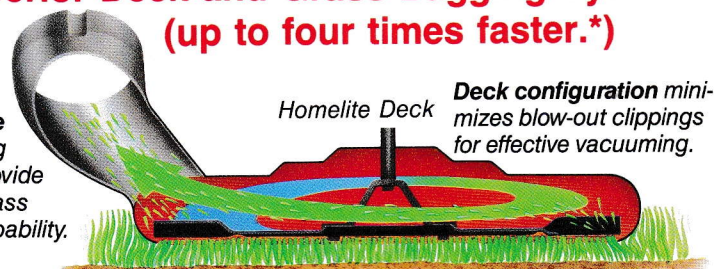

Deck readily converts to side-discharge mode for gentle, even distribution of clippings on lawn surface.

***Aerodynamically-balanced blade creates increased air velocity up to four times faster than conventional systems.**

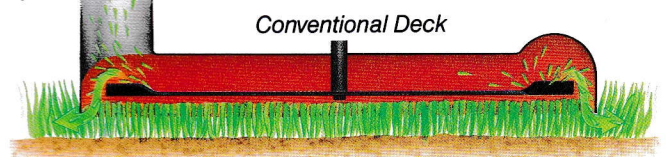

RIDING LAWN TRACTORS

RUGGED WORKHORSES THAT CUT YARD WORK DOWN TO SIZE

Homelite® riding lawn tractors deliver comfort, simplicity and rugged performance. All controls are easy to reach for simplified operation. Rack-and-pinion steering assures sure handling with a tight 30 in. (76 cm) turning radius on the HRT1240G and 22 in. (56 cm) on the LT1438H. The pivoting front axle gives you a comfortable level ride. Convenient key starting gets you under way instantly. Dual headlights extend your working day. The comfortable cushioned vinyl-covered seat reduces fatigue. Wide tires prevent tracks on the lawn. Safety-interlock seat switch prevents PTO engagement when you're not in the seat. Mowing deck mounts easily without tools. The heavy duty steel frame stands up to weather and wear.



HRT1240G

This unit is equipped with a 40 in. (101 cm) mowing deck and powerful 12 HP Briggs & Stratton synchro-balanced Industrial/Commercial engine. This quiet, smooth running engine features a long-life, minimum-maintenance *Magnetron* electronic ignition, electric start and on-board alternator for charging the 12 volt battery. **Standard Features:** ■ 6-speed shift-on-the-go transaxle with six forward speeds and two reverse speeds for easy operation. ■ Full floating twin blade 40 inch cut with manual 6 position height adjustment. ■ Disc brake with automatic parking release. ■ Solid-state ignition. ■ Combination clutch/brake pedal. ■ Automotive type steering wheel. ■ Turf saver front and rear tires. ■ Easy fill translucent one-gallon gas tank. ■ Wraparound type headlights. ■ Tilt seat. ■ Electric starter with 12 volt alternator. **Options:** ■ Rear mounted twin bag grass catcher (7 cu. ft. capacity) that accepts standard 33 gallon lawn bags, 40" single stage snowblower, 40" dozer/snow blade, tire chains and wheel weights.

LT1438H

You get peak performance with this unit which is equipped with a Briggs & Stratton 14 HP *Vanguard* engine. The unit gives peak torque at low RPM. Its compact "V" cylinder design reduces vibration for an extremely smooth, quiet performance. Within the engine cast iron sleeves protect against wear. The overhead valve design (OHV) allows for more HP output with less displacement. There is less carbon build-up, longer valve life and improved fuel economy. A hydrostatic transmission provides smooth automated no shift operation for easy handling and riding comfort. **Standard Features:** ■ A *Magnetron* electronic ignition for easy starts. ■ Dual element air filtering system. ■ Sound treatment package provides quiet running for operator comfort. ■ Full pressure lubrication provides controlled flow of oil to bearings for less wear and longer life.



LT1238G

This unit is equipped with a 38 in. (96 cm) mowing deck and reliable 12 HP Briggs & Stratton synchro-balanced Industrial/Commercial engine. The smooth-running, low-noise engine features a long-life, minimum-maintenance *Magnetron* electronic ignition, electric start and an on-board alternator for charging the battery. Other valuable features include: ■ A 6-speed transmission with six forward speeds and two reverse speeds for optimum performance under various conditions. ■ 1¼ gal. (4.7 L) fuel tank for fewer stops and extended operation.

RIDING LAWN TRACTOR SPECIFICATIONS

Model	HRT1240G	LT1238G	LT1438H
UT No.	33024	33021	33022
Engine	12 HP Briggs & Stratton Synchro-balanced I/C	12 HP Briggs & Stratton Synchro-balanced I/C	14 HP OHV Twin Cylinder Briggs & Stratton Engine
Fuel Capacity gal. (L)	1 (3.8)	1¼ (4.7)	1¼ (4.7)
Speeds (Forward) MPH (Km/h)	up to 5.6 (8.9)	up to 5.6 (8.9)	Variable to 6.3 (10.1)
Wheels			
Front	15.00 x 6.00	15.00 x 6.00	15.00 x 6.00
Rear	18.00 x 9.50	18.00 x 8.50	20.00 x 10.00
Mowing Deck in. (cm)	40 (101)	38 (96)	38 (96)
Dimensions in. (cm)	L 63 (160) W 37 (94) H 39 (99)	L 66 (168) W 35 (89) H 36 (91)	L 66 (168) W 39 (99) H 36 (91)
Weight lbs. (kg)	420 (191)	465 (211)	495 (224)
Shipping Wt. lbs. (kg)	450 (204)	495 (225)	525 (239)

TWO YEAR LIMITED WARRANTY!



Homelite® Lawn Tractors



Homelite® Riding Mowers

When you have a Homelite® riding mower or tractor pulling for you, you have a lot of power to do a lot of work. That's why we offer such a complete line of attachments and accessories.

Whether you're picking up clippings, carting, cutting, spreading or even plowing, you can count on these quality attachments for dependability.



Super Bagger Grass Catcher System
(30" and 35" Decks)
UT No. 36060
(Requires #36061)



Barrel Bagger™ Grass Catcher System
UT No. 36072




Single Bag Rear Grass Catcher
UT No. 36069



Twin-Tapered Bag Rear Grass Catcher
UT No. 36070



Fertilizer Spreader
UT No. 36062

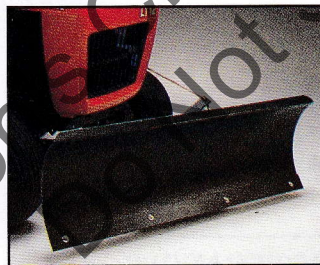

Front Snow Blade
UT No. 36073 (LT1438H)
UT No. 36080 (HRT1240G)



Fertilizer Spreader
UT No. 36062




30 in. (76 cm) Dethatcher
UT No. 36056A



Dump Carts

- UT No. 36001 4 cu. ft. (113 L)
- UT No. 36061 7 cu. ft. (198 L)
- UT No. 36006 10 cu. ft. (283 L)

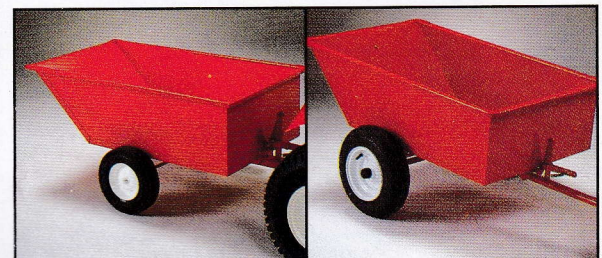

Dump Carts

- UT No. 36001 4 cu. ft. (113 L)
- UT No. 36061 7 cu. ft. (198 L)

BLOWERS & BLOWER/VACS

BLOWERS. THEIR VERSATILITY MAKES CLEANING UP A BREEZE.

Homelite® blowers and blower/vacs are ideal for such outdoor cleanup jobs as sweeping leaves, dirt, grass clippings and debris from lawns, driveways, patios and other surfaces. The Homelite® Blower/Sprayer/Mister is an excellent tool for spraying insecticides, fertilizers and herbicides on lawns, shrubs, trees and gardens.

IT'S A BLOWER!



The HB-180 is a balanced power blower that delivers a maximum air velocity of 150 MPH.

IT'S A VAC!



The HB-180V is a combination blower/vacuum that allows you to vacuum and bag in one easy step.

BLOWER ACCESSORIES

Part No.	Description
A-00390-C	Easy, screw-on vacuum attachment kit (HB-180, HB-180V)
DA-98138-A	Shoulder strap kit (HB-180, HB-180V)

Fingertip Control. Conveniently located On/Off switch on the handle. Trigger throttle provides precise control from low idle to maximum speed.

Down-The-Tube Exhaust. Engine exhaust is sent down the tube away from you. This allows greater comfort and right or left-handed operation.

All-Position Operation. The combination of lightweight, perfect balance and engine efficiency lets you operate the unit in any position.

Perfect Balance. Reduces Arm Fatigue. With the balance centered in the handle, you can move the blower easily.

Extra-Large Bag. Extra-large 1¾ bu. (61 L) bag capacity lets you pick up more before stopping to empty.

Dependable Performance. Dependable 2-cycle, air-cooled Homelite® engine for reliable 1-to-3 pull starting.

Quietest In The Industry. This powerful blower measures only 70 dBA at 50 ft. (15 m).

BLOWER SPECIFICATIONS

Model	HB-100	HB-180	HB-180V
UT No.	08011	08009	08010
Displacement	25 cc	25 cc	25 cc
Vacuum Capability	N/A	Optional	Standard
Max. Air Volume CFM	350	375	375
Max. Air Velocity mph (km/h)	150 (241)	150 (241)	150 (241)
Decibels (dBA) at 50 ft.	69	69	69
Length in. (cm)	13.5 (34)	12 (30.5)	12 (30.5)
Width in. (cm)	9 (23)	9½ (24)	9½ (24)
Height in. (cm)	14½ (37)	13½ (34)	13½ (34)
Weight lbs. (kg)	9.6 (4.4)	10 (4.5)	10 (4.5) (Blower only)

NOTE: Specifications subject to change without notice.

Controlled Air Flow. For more efficient blower operation, deeper nozzle allows greater control of the air flow.

**150 MPH AIR JET!
THIS POWERFUL
HURRICANE AIR JET
MAKES CLEANUP A
BREEZE.**

Comfortable Operation. Low vibration levels, better balance and no torque reaction make Homelite® blowers easy to manage and operate.

DO NOT OPERATE VACUUM WITHOUT BAG SECURELY FASTENED. DO NOT OPEN, REMOVE OR ATTACH BAG WHILE ENGINE IS RUNNING. REPLACE WORN OR WEAKENED WITH HOMELITE REPLACEMENT.

HB-180V

**2 YEAR
LIMITED WARRANTY**

MADE IN THE USA

BP-250

- 08017
- 25 cc
- N/A
- 375
- 150 (241)
- 70
- 5 (38)
- 10 (27)
- 20 (50)
- 12¾ (5.8)




HB-100 BLOWER

Weighing less than 10 pounds, this handheld blower produces a 150 mph (241 km/hr) hurricane of power to clean up leaves, grass clippings and debris quickly and easily. Fingertip controls and its low noise operation makes this blower a great work-saver.



HB-180 BLOWER

The HB-180 is a lightweight, versatile blower for most home cleanup chores. Its 25 cc Homelite® gasoline engine features a solid state ignition for quick, dependable starts. This handy blower has the power to quickly clear leaves, grass clippings and other debris. (The optional vacuum attachment quickly converts the HB-180 into a blower/vacuum.)

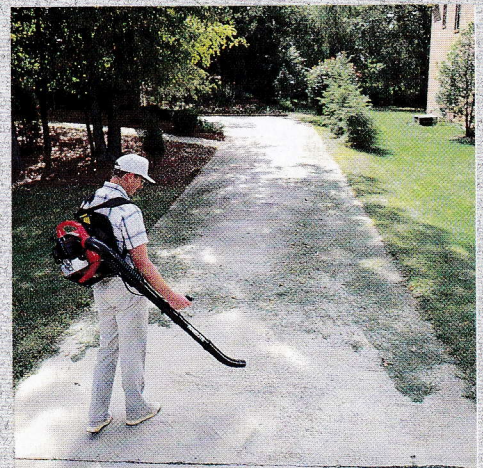

The BP-250 Backpack Blower is designed to take on the tough jobs with comfort, power and low noise.

BP-250 BACKPACK BLOWER

This portable blower is lightweight at 12¾ lbs., produces a powerful 150 mph air velocity and is super quiet, operating at a maximum sound level of 70 decibels at 50 feet. The unit's fully padded backpack harness slips easily on-or-off and permits the operator to work comfortably for hours.

TILLERS AND CULTIVATORS

POWER TO DIG IN AND WORK HARD

Homelite® garden tillers are designed to dig deep and turn earth around the home, in the garden or on the farm. Powered by dependable Briggs & Stratton engines, these tillers have the might to work long and hard. Three different models give you a choice for the tilling jobs you have to do.

MTC-12 FRONT-TINE TILLER

This front-tine tiller turns gardens, landscapes and lawns into easy-to-tend "showpieces." A rugged worm-gear drive transmission and durable heavy-duty centrifugal clutch make the MTC-12 a rugged long-life unit that's practically maintenance free. Attachments include: dethatcher (JA-994121), aerator (JA-994122), edger (JA-994123) and wheel transport kit (JA-994124).



RT-5 REAR-TINE TILLER

This heavy-duty, rear-tine tiller is powered by a 5 HP Briggs & Stratton engine. Built to work hard with a heavy-duty chain drive and pneumatic tires, it tills to a depth from 1 in. to 6 in. with 11 in. slasher tines. **Standard Features:** Full-width tine shield, a trailing shield to smooth out the ground and counter rotating tines.



FT-5 FRONT-TINE TILLER

Powered by a 5 HP Briggs & Stratton engine, this popular-sized front-tine tiller cuts a path up to 26 in. wide. Its depth bar can be adjusted to 7 in. **Standard Features:** Chain drive with 14 in. diameter rigid steel tines, tubular steel handles, 10 in. diameter semi-pneumatic tires.



The Homelite® MTC-12 tiller/cultivator goes into places full-size tillers can't go. It turns gardens, landscapes and lawns into easy-to-tend "showpieces." It's the perfect size for small home jobs like flower beds to help in soil preparation, weeding and hoeing.

TILLER SPECIFICATIONS

Model	MTC-12	RT-5	FT-5
UT No.	22082	22084	22083
Engine	Tecumseh 2 cu. in. (32.8 cc)	B&S 5 HP 12.6 cu. in. (206.5 cc)	B&S 5 HP 12.6 cu. in. (206.5 cc)
Drive	Worm gear	Chain	Chain
Tilling Width	7 in.-10 in. (18 cm-25 cm)	11 in.-24 in. (28 cm-61 cm)	20 in.-26 in. (50 cm-66 cm)
Tine Circle Diameter	8 in. (20 cm)	11 in. (28 cm)	14 in. (36 cm)
Depth Control	Adjustable to 4 in. (10 cm)	1 in.-6 in. (2 cm-15 cm)	Adjustable to 7 in. (17 cm)
Length	36 in. (91 cm)	56 in. (142 cm)	46 in. (116 cm)
Width	15 in. (38 cm)	25 in. (63 cm)	25 in. (63 cm)
Height	41 in. (104 cm)	43 in. (109 cm)	40 in. (101 cm)
Shipping Wt.	25 lbs. (11.3 kg)	175 lbs. (79.4 kg)	120 lbs. (54.4 kg)

NOTE: Specifications subject to change without notice.

PRESSURE WASHER SPECIFICATIONS

Model	HPW1000E	HPW1200B
UT No.	01802	01803
Pressure	1000 PSI (68 BAR)	1200 PSI (82 BAR)
Motor	1.5 HP 120 V Electric 3,450 RPM	4-cycle Briggs & Stratton, 3 HP @ 3,600 RPM
Flow	1.8 GPM (6.8 L/min)	1.7 GPM (6.4 L/min)
Length	29 in. (74 cm)	29 in. (74 cm)
Width	17 in. (43 cm)	17 in. (43 cm)
Height	35 in. (49 cm)	35 in. (49 cm)
Weight	76 lbs. (34.5 kg)	73 lbs. (33 kg)

NOTE: Specifications subject to change without notice.



For outdoor washing or cleaning a Homelite® pressure washer can make almost any cleanup less of a chore. The trigger type hand gun with 24 inch wand has an adjustable tip that can be set from low pressure to high-pressure for versatility in many cleaning jobs such as preparing a house for painting.



CLEANING POWER AT YOUR FINGERTIPS.

Homelite® Pressure Washers can handle a wide variety of cleaning tasks. These 1000 and 1200 PSI units are lightweight and portable to clean houses, walks, cars, trucks, boats, motor homes, swimming pools and much more. The wheeled dollies make it easy to get around. Both of these dependable units feature quick-connect couplings at both ends of the hose to get you in action easily. A pulsation dampener absorbs shocks from pressure pulses for increased unit life.

HPW1000E (ELECTRIC)

You can clean homes, boats, cars, RV's and more with this electric pressure washer. The wheeled dolly give you complete mobility with a convenient cord hook for easy storage. The HPW1000E also features adjustable downstream soap and chemical solvent injection to provide you with complete cleaning control. For your protection, a ground fault interrupter (GFI) is provided on 35 ft. (10.7 m) of power cord to insure electrical connections are isolated from your work area. A pulsation dampener reduces vibration and surges for longer machine life and comfortable operation.

HPW1200B (GAS-POWERED)

This gas-powered washer gives you 1200 PSI of washing power with a 3 HP Briggs & Stratton 4-cycle gas engine. The two-wheeled dolly gives you mobility, while the big three quart fuel tank lets you get the cleaning done with few stops. The trigger-control wand and downstream soap and chemical injection help make any big cleaning chore a breeze. A pulsation dampener reduces vibration and surges for longer machine life and comfortable operation.

- Ideal to clean up these jobs around the home: ■ Mud and grass on mowers, tractors, and garden tools ■ House surfaces for painting ■ Winter dirt on lawn and garden furniture ■ Oil, grease and other driveway soil ■ Moss, algae and dirt on sidewalks, patios, walls and fences ■ Cluttered gutters ■ Grimy barbecue grills ■ Pools, saunas and spas ■ Dirty kennels and animal pens ■ Clean all types of vehicles: cars, trucks, RVs, motorcycles, boats and bicycles.

SPACE HEATERS

DEPENDABLE PERFORMANCE YOU CAN WARM UP TO ANYWHERE

Heat up your garage, barn or workshop, small buildings, warehouses and construction sites fast with these Homelite® portable oil-fired and propane heaters.

Homelite® kerosene space heaters use No. 1 fuel oil or kerosene and plug into any 110V electrical outlet to deliver from 35,000 BTUs to 150,000 BTUs. All units are ARL approved. Through balanced combustion and state-of-the-art ignition systems, they provide quiet operation at nearly 100% fuel efficiency.

Homelite® propane space heaters provide from 150,000 BTUs to 375,000 BTUs. One model, the HP250, is a convection heater and requires no electricity to operate. When needed, more than one propane heater can be run off the same fuel supply.

How To Select A Space Heater:

- 1) Determine the size of the area you want to heat. The larger the area, the greater the BTUs needed to heat it. Consult the specifications chart to find the number of cubic feet of space each unit can thoroughly heat.
- 2) Estimate the length of time you expect to operate the space heater continuously. Running time is directly related to fuel capacity and efficiency.
- 3) Consider mobility. Although Homelite® space heaters are portable, you may want to add a wheel carriage for greater mobility.

Standard Features on most Homelite space heaters:

- High-capacity blower circulates warm air the instant the heater is turned on.
- Solid-state ignition system makes starting instantaneous.
- Self-lubricating air compressor for longer life and smoother performance.
- Automatic shut-off for safety.
- Stainless steel combustion chamber for long wear.
- Flame-out control for added safety.

KEROSENE

HH35

The HH35 is a compact, low-cost heater with enough output to warm a small garage or shop. It's perfect for heating up small work areas in a hurry.

HH50

The HH50 provides enough efficient, low-cost heat to warm most 2-car garages, sheds or workshops. It operates for up to 11 hours on one filling of kerosene or No. 1 fuel oil.

HH100

This heavy-duty model is rated for the extra-big heating needs of contractors, farmers and larger commercial uses. It will run 12 hours on one filling of kerosene or No. 1 fuel oil. Front handle and wheel carriage included for added portability.

HH150

This workhorse is powerful enough for the heating needs in warehouses, barns and construction sites. Equipped with heavy-duty wheels and a front handle for mobility, it will run for 12 continuous hours on one filling of kerosene or No. 1 fuel oil.



WARNING!


Note: Do not use Homelite® space heaters to heat living or sleeping areas. Space heaters are only to be used in well-ventilated areas. Emissions from space heaters may cause asphyxiation from carbon monoxide or lack of oxygen. Do not use space heaters near volatile materials such as gasoline.

PROPANE



HP155

A truly versatile propane heater, the HP150 can deliver 150,000 BTUs of comfortable, efficient heat. This is an excellent heater for outbuildings, to warm concrete during curing or for a large barn or workshop. This unit features a direct spark ignition, high-capacity blower and a high-torque motor for reliable starts.

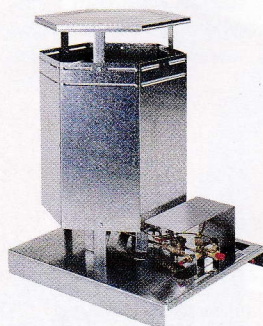

HP275

This propane convection heater is ideal for heating locations where electricity is unavailable. This economical unit delivers 230,000 BTUs of comfortable heat. This unit features a quick-start push-button Piezo ignition that needs no matches, a stainless steel top for long life and an automatic fuel shut-off safety system.



HP375

The quietest propane heater in its class, the HP375 packs 225,000 to 375,000 BTUs in a small, compact, portable shell. Heat output is controlled by manually adjusting the regulator. Other features include direct spark ignition, high capacity blower, a high torque motor for reliable starts, flame-out safety sensor, air-sensor safety switch, hose and regulator.


SPACE HEATER SPECIFICATIONS

Model	UT No.	Output BTUs	Operating Time (hrs)	Heating Area cu. ft. (cu. m)	Fuel Capacity gal. (L)	Motor (HP) (60 Hz AC, 115V)	Air Flow (cfm)	Length in. (cm)	Width in. (cm)	Height in. (cm)	Weight lbs. (kg)
KEROSENE											
HH35	65042	35,000	11.5	5,000 (140)	3 (11.3)	1/15	180	30 (76)	11.8 (30)	13.8 (35)	35 (15.8)
HH50	65043	50,000	10.9	6,000 (190.4)	4 (15.1)	1/15	180	30 (76)	11.8 (30)	14.8 (37)	36 (16.3)
HH100	65044	100,000	12.2	13,600 (380.8)	9 (34.1)	1/6	400	34 (86)	18 (47)	21 (54)	52 (23.5)
HH150	65045	150,000	12.2	20,500 (574)	13 (51.1)	1/4	540	41.7 (105)	20 (52)	25 (63)	74 (33)
PROPANE											
HP155	65052	150,000	-	20,500 (574)	N/A	1/8	550	32 (81)	13.25 (34)	16.5 (42)	32 (14.5)
HP275	65053	230,000	-	34,200 (958)	N/A	N/A	N/A	17.2 (44)	13.8 (35)	21.5 (55)	15 (6.8)
HP375	65048	375,000	-	51,000 (1,428)	N/A	N/A	1,500	34 (86)	12.6 (32)	19.7 (50)	52 (23.6)

NOTE: Specifications subject to change without notice.

Kerosene or Propane?

Kerosene's primary advantage is its ready availability and low price. However, when propane is the predominant fuel source as it often is on the farm or a job site, it does offer several specific benefits. Propane is a lighter fuel with less chance of contamination and its clean burning characteristics mean virtually no maintenance is required. In addition, using propane eliminates a lot of fuel handling since the tank is usually filled by the propane dealer.

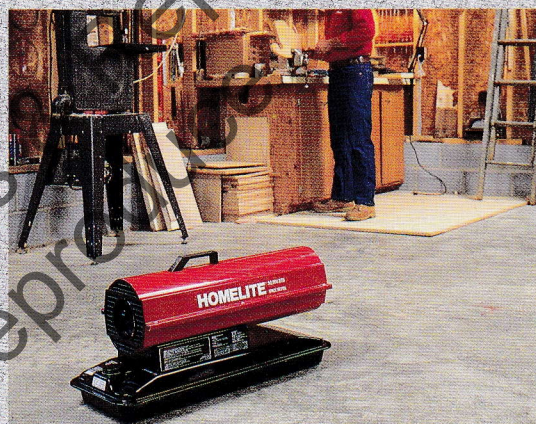

HEATER ACCESSORIES

Part No.	Description
00529-03	Portable forced air thermostat maintains pre-selected temperature on oil-fired and propane heaters (except HP275).
00529-05	Wheel and handle kit for HH35 and HH50 space heaters.
00529-33	Tune-up parts (spark plug and air filter kit) for HH35 and HH50.
00531-04	Tune-up parts (spark plug and air filter kit) for HH100 and HH150.

GENERATORS

PORTABLE POWERHOUSES THAT WON'T LEAVE YOU IN THE DARK.

High-performance Homelite® generators are compact and portable and designed to provide economical electric power when and where you need it. These rugged, durable generators deliver a wide range of power and can be matched to the electrical requirements around your home, farm, campsite or workplace.

EH SERIES

All EH series portable gasoline-powered generators feature cast iron sleeves that provide up to 3 times the life of a conventional engine!

EH2500HD

For emergencies, power tools or odd jobs around the home, this economical generator is your machine. With all the performance and dependability of its high-powered cousins, the EH2500HD gives you 2300 watts of continuous AC power with 2500 watts for powerful motor start-ups. It features a two-plug 120 volt receptacle with "U" ground. Inherent voltage regulation protects your valuable appliances from high- and low-voltage power surges.

EH4400HD & EHE4400HD

Whether you need economical power for emergency standby or to run power tools and other equipment around the home or farm, the EH4400HD is a power plant you can count on. The EH-series generators deliver 4000 watts of continuous power with up to 4400 watts available for powerful start-ups. The EHE4400HD delivers all the power and performance of the EH4400HD with the addition of an electric starter and battery for quick starts in an emergency. The on-board alternator keeps the battery fully charged for reliable starts when needed.

EH5500HD & EHE5500HD

The 5500 series are more powerful generators with synchro-balanced engines that have cast-iron sleeves for longer life. The EH5500HD generator delivers 5000 watts of continuous power with up to 5500 watts available for powerful start-ups. The EHE5500HD is the electric start version of the EH5500HD. It has a battery with foot activated starter. An on-board alternator keeps the battery fully charged for reliable starts when needed.

EHE4400HD. Economy generator delivers maximum power levels at low cost.




Extra-Large Fuel Tank for Longer Running Time.

EHE4400HD

Heavy-Duty Cast Aluminum Cooling Fan.

Handy Foot-Start. Foot-activated electric start eliminates bending. The on-board alternator keeps the battery fully charged. (Recoil start backup standard.)

NOTE: NEMA TYPE RECEPTACLE CODES AND SYMBOLS SHOWN WITH EACH GENERATOR LISTING.

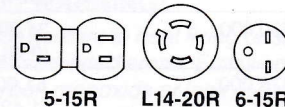

**CAST IRON SLEEVE!
PROVIDES UP TO 3 TIMES
THE LIFE OF A
CONVENTIONAL
ENGINE**

Protection And Convenience. The easy-carry tubular roll cage is powder painted for rust resistance and provides the generator with a sturdy measure of protection.


Reliable Power. The solid-state voltage regulator maintains output voltage to 6% (same as your local power company).

Circuit Breaker Protection. Prevents damage to generator in event a line or tool shorts out.

"No Tools" Easy-Ground Lug Feature.

Sure-Footed Stability. Rubber feet prevent the unit from "walking" during operation.

Low Tone Muffler

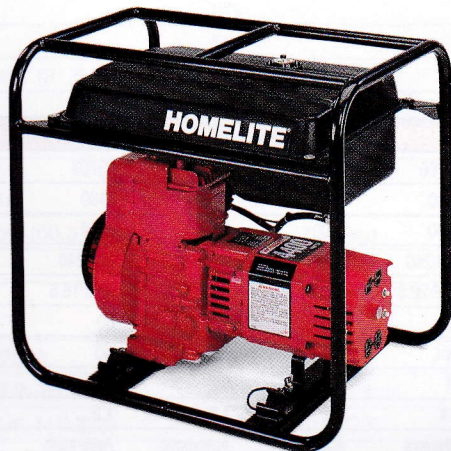


HRL4400HD

The new Homelite® HRL4400HD generator is compact and portable and provides heavy duty electrical power for a full working day, on one tank of gas. It has a powerful 8 HP Briggs & Stratton engine, low-oil shut-off, circuit breakers and vibration-isolated mounts. A rugged tubular steel frame protects the generator from rough handling.


HL SERIES

The HL series offers a line of portable gas-powered generators from 2500 to 5500 watts. These units provide compact design, economical operation and manual or electric start versions.

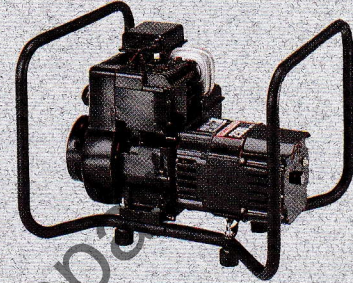


HL2500

This unit offers dependable power when and where you need it. Its 5 HP Briggs & Stratton engine provides the emergency power you need. Features include: circuit breaker protection, low tone muffler, solid-state ignition and two 120 volt AC outlets.

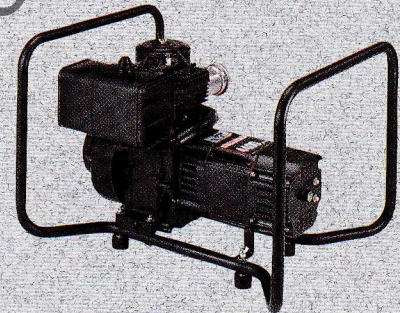

HL4400 & HLE4400

These rugged units provide 4400 watts* of electric power. The HL4400 is manual start and the HLE4400 is an electric start unit. Features include: Two 120 volt outlets and two 240 volt AC outlets, rugged 8 HP Briggs & Stratton engine, solid-state ignition, circuit breaker protection, low tone muffler and heavy duty air cleaner. The electric start unit has an on-board alternator for battery charging.

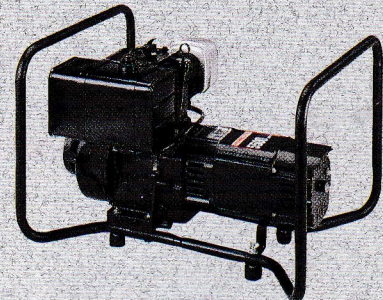

HL5500 & HLE5500

These units deliver maximum power levels at low cost. You have 5500 watts* to handle almost any emergency. Features include: a rugged 10 HP Briggs & Stratton engine, solid-state ignition, circuit breaker protection.


*Maximum

GENERATORS

GENERATOR ACCESSORIES


Super Lo-Tone Muffler

An easy-to-install option for the EH4400 generator only. It replaces the harsh "bark" of a standard muffler with a low, mellow sound. Great for standby operation and use where noise is objectionable.

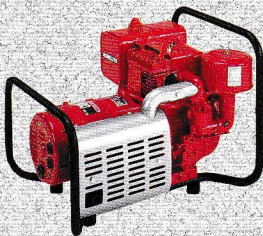


Two Wheel Generator Dolly

Eliminate lifting and lugging with this convenient dolly. Installation is simple and easy. Fits all Homelite® EH series generator models.

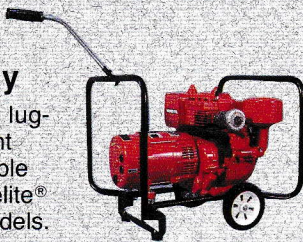

Two Wheel Transport Dolly

Heavy duty tubular steel with semi-pneumatic tires. Fits all Homelite® 176, 178, 180 series and HG3500 and HGE3500 generator models.

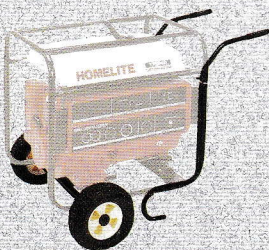

Spark Arrestor

Latest design spark arrestor for safety and fire prevention. Meets USDA Forest Service standard. Installs easily with special clamp. Fits all Homelite® 176, 178, 180 series, EH4400HD, EHE4400HD, and HG3500 and HGE3500 generator models equipped with Briggs & Stratton engines.



SELECTING A GENERATOR
TABLE 1: HOME APPLIANCES
APPROXIMATE WATTAGE REQUIREMENTS

Equipment	Wattage*	Equipment	Wattage*
Air Conditioning (10,000 BTU)	2000-3000	Food Freezer	300-500
Blanket	150	Heater (Radiant)	1300
Broiler	1400	Hot Plate	1250
Clothes Dryer (Electric)	5000-10,000	Refrigerator/Freezer	600-2000
Coffee Maker	850	Sump Pump	400-3000
Dishwasher	1500-2500	TV (Color)	100-350
Fan (Attic)	375	Toaster	1100-1700
Fan (Furnace)	800-1200	Water Heater	3000-4500
Fan (Window)	200	Water Pump	1000-3000
Heaters, Space	1/4 to 2 hp	Saws, Chain	800-1500
Compressors	1/4 to 3 hp	Saws, Circular 6 in. (15 cm)	1000-2500
Drills 1/4 in. (.62 cm)	250-600	Drills 3/8 in. (.95 cm)	300-600
Saws, Table	1 to 3 hp	Drills 1 in. (2.5 cm)	1000
Grinders, Bench	1/4 to 1 hp	Lights	Check bulb wattage

TABLE 2: MOTOR-STARTING REQUIREMENTS

Motor HP Rating	Approx. Running Watts	Universal Motors	Motor HP Rating	Repulsion Induction Motors	Capacitor Motors
1/8	275	400	1/8	600	850
1/4	400	500	1/4	850	1050
1/3	450	600	1/3	975	1350
1/2	600	750	1/2	1300	1800
3/4	850	1000	3/4	1900	2600
1	1000	1250	1	2300	3000

*Horsepower of higher horsepower are not generally used in this classification.

GENERATOR ACCESSORIES

Part No.	Description
A-31656-G	Floodlights.
46058 (100 amp)	Manual line transfer switches.
46057 (200 amp)	(required by National Electric Code whenever a standby generator takes over from normal electric service).
UT/05048	Dolly Kit. HG50-3400, HG50-5300 and HD50-3800.
A-49945	Super Lo-Tone muffler. Optional on EH4400HD and EHE4400HD. EH & HL models (4400 series only).
UT/05041	Dolly Kit optional on all EH and HL model 4400 & 5500 series.
A49942	Spark arrestor (all generators using Super Lo-Tone muffler).

GENERATOR SPECIFICATIONS


Model	EH2500HD	EH4400HD	EHE4400HD	EH5500HD	EHE5500HD	HL2500	HL4400	HLE4400	HL5500	HLE5500	HRL4400HD
UT No.	03700	03701	03705	03702	03706	03697	03698	03703	03699	03704	03751
Watts (Int.)	2500	4400	4400	5500	5500	2500	4400	4400	5500	5500	4400
Watts (Cont.)	2300	4000	4000	5000	5000	2300	4000	4000	5000	5000	4000
Volts AC	120	120/240	120/240	120/240	120/240	120	120/240	120/240	120/240	120/240	120/240
Amps AC	19.1	33.3/16.6	33.3/16.6	41.6/20.8	41.6/20.8	19.1	33.3/16.6	33.3/16.6	41.6/20.8	41.6/20.8	33.3/16.6
CPS (Hz)	60	60	60	60	60	60	60	60	60	60	60
Low Oil Shut-Off	Opt.	Opt.	Opt.	Opt.	Opt.	No	No	No	No	No	Yes
HP @ 3600 RPM	5.0	8.0	8.0	11	11	5.0	8.0	8.0	10	10	8
Run Time/Tank (hrs)*	1.8	1.2	1.2	1.4	1.4	1.8	1.2	1.2	1.4	1.4	7.8
Volt Reg.	Inherent	Inherent	Inherent	Inherent	Inherent	Automatic	Automatic	Automatic	Automatic	Automatic	Inherent
Ship Wt. lbs. (kg)	75 (34)	109 (49.5)	131 (59)	141 (64)	163 (73.9)	72 (32.6)	101 (45.8)	123 (55.8)	132 (59.8)	154 (69.8)	155 (70.3)

NOTE: Specifications subject to change without notice.

*At full rated continuous load.

RECEPTACLES FOR 50 Hz GENERATORS

Europe
250 V 16 AMP



France
250 V 10 AMP




United Kingdom
120 V 16 AMP



220 V 16 AMP



South Pacific (Australia)
250 V 10 AMP



HOMELITE® 50 Hz GENERATORS

	HG50-1400	HG50-2000	HG50-2500
SPECIFICATIONS:			
*Model (UT No.)	HG50-1400EU (03651) HG50-1400FR (03652) HG50-1400UK (03719) HG50-1400SP (03654)	HG50-2000EU (03655) HG50-2000FR (03656) HG50-2000UK (03720) HG50-2000SP (03658)	HG50-2500EU (03659) HG50-2500FR (03660) HG50-2500UK (03721) HG50-2500SP (03662)
Engine	Wisc. Robin W1-145 3.4 HP @ 3000 RPM	Wisc. Robin W1-185 4.6 HP @ 3000 RPM	Wisc. Robin W1-230 5.5 HP @ 3000 RPM
Voltage Regulation	10%	10%	10%
CPS (Hz)	50	50	50
Fuel Capacity	2 gals. (7.6 L)	2 gals. (7.6 L)	2 gals. (7.6 L)
Running Time (hrs./tank)*	7.0	5.0	3.0
Outlets	1 (2 UK)	1 (2 UK)	1 (2 UK)
Noise Level at 7 Meters (23 ft.)	68 dBA	70 dBA	74 dBA
Weight (Unit)	78 lbs. (35.4 kg)	88 lbs. (39.9 kg)	102 lbs. (46.3 kg)
Oil Level Warning System	Yes	Yes	Yes
Exhaust Muffler (extra large/low tone)	Yes	Yes	Yes
Wattage – Max./Cont.	1400/1200	2000/1700	2500/2100
AC Amps	5.2 (UK 10.9/5.5)	7.4 (UK 15.5/7.7)	9.1 (UK 19.1/9.5)
AC Volts	230 (UK 110/220)	230 (UK 110/220)	230 (UK 110/220)
DC Output: Amps/Volts	8.2/12	8.2/12	8.2/12

	HG50-3400	HG50-5300	HD50-3800
SPECIFICATIONS:			
*Model (UT No.)	HG50-3400EU (03723) HG50-3400FR (03664) HG50-3400UK (03722) HG50-3400SP (03666)	HG50-5300EU (03724) HG50-5300FR (03725) HG50-5300UK (03669) HG50-5300SP (03670)	HD50-3800EU (03675) HD50-3800FR (03725) HD50-3800UK (03677) HD50-3800SP (03678)
Engine	Wisc. Robin W1-230 7.6 HP @ 3000 RPM	Wisc. Robin W1-390 11 HP @ 3000 RPM	Wisc. Robin WRD1-350 7.5 HP @ 3000 RPM
Voltage Regulation	6%	6%	6%
CPS (Hz)	50	50	50
Fuel Capacity	5.7 gals. (21.5 L)	5.7 gals. (21.5 L)	1.2 gals. (4.5 L)
Running Time (hrs./tank)*	12.5	6.0	3.0
Outlets	2	2	2
Noise Level at 7 Meters (23 ft.)	74 dBA	76 dBA	80 dBA
Weight (Unit)	133 lbs. (60.3 kg)	171 lbs. (77.6 kg)	183 lbs. (83.0 kg)
Oil Level Warning System	Yes	Yes	No
Exhaust Muffler (extra large/low tone)	Yes	Yes	Yes
Wattage – Max./Cont.	3400/2800	5300/4300	3800/3500
AC Amps	12.2 (UK 25.5/12.7)	18.7 (UK 39.1/19.5)	15.2 (UK 31.8/15.9)
AC Volts	230 (UK 110/220)	230 (UK 110/220)	230 (UK 110/220)
DC Output: Amps/Volts	8.2/12	8.2/12*	8.2/12

*Code number suffixes indicate:

EU = Europe UK = United Kingdom
FR = France SP = South Pacific

*UT No. 03688 (8.2/24)



HG50-1400



HG50-2000




HG50-2500



HG50-3400



HG50-5300

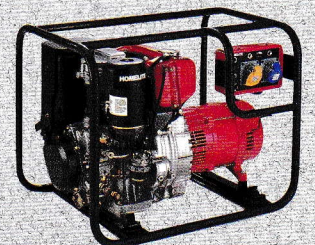

HD50-3800

PUMPS

THE POWER TO MOVE WATER WHERE YOU WANT IT.

Homelite® pumps are perfect for most water transfer needs such as pool care, pressure washing, spraying, watering lawns and gardens, drainage and even fire fighting.

How To Select Your Pump.

As with any power equipment, your first consideration must be how you will use it. You should determine about how much water you want to pump, how fast and in what volume. With this information, you can choose the appropriate pump with the correct power and capacity for your needs.

THE AP-125 PUMP

This lightweight pump weighs just 9 lbs. (4 kg), yet moves up to 1,860 gal. (7,040 L) per hour. The pump uses a 1 in. (2.5 cm) suction hose and discharges through an ordinary garden hose. It comes complete with couplings, adapters and 10 ft. (3 m) of suction hose with strainer.





CENTRIFUGAL PUMPS

The CC series pumps have closed-vane impellers that eliminate the need for shimming. The discharge nipple on CC series pumps can be rotated easily to discharge in any direction.

CC200


This rugged pump is excellent for all types of clear water transfer, as well as for situations where a small amount of solids may be mixed with the water. Its 3 HP I/C engine handles up to 9,000 gph (34,100 L/h) with a 2 in. (5 cm) suction and discharge.

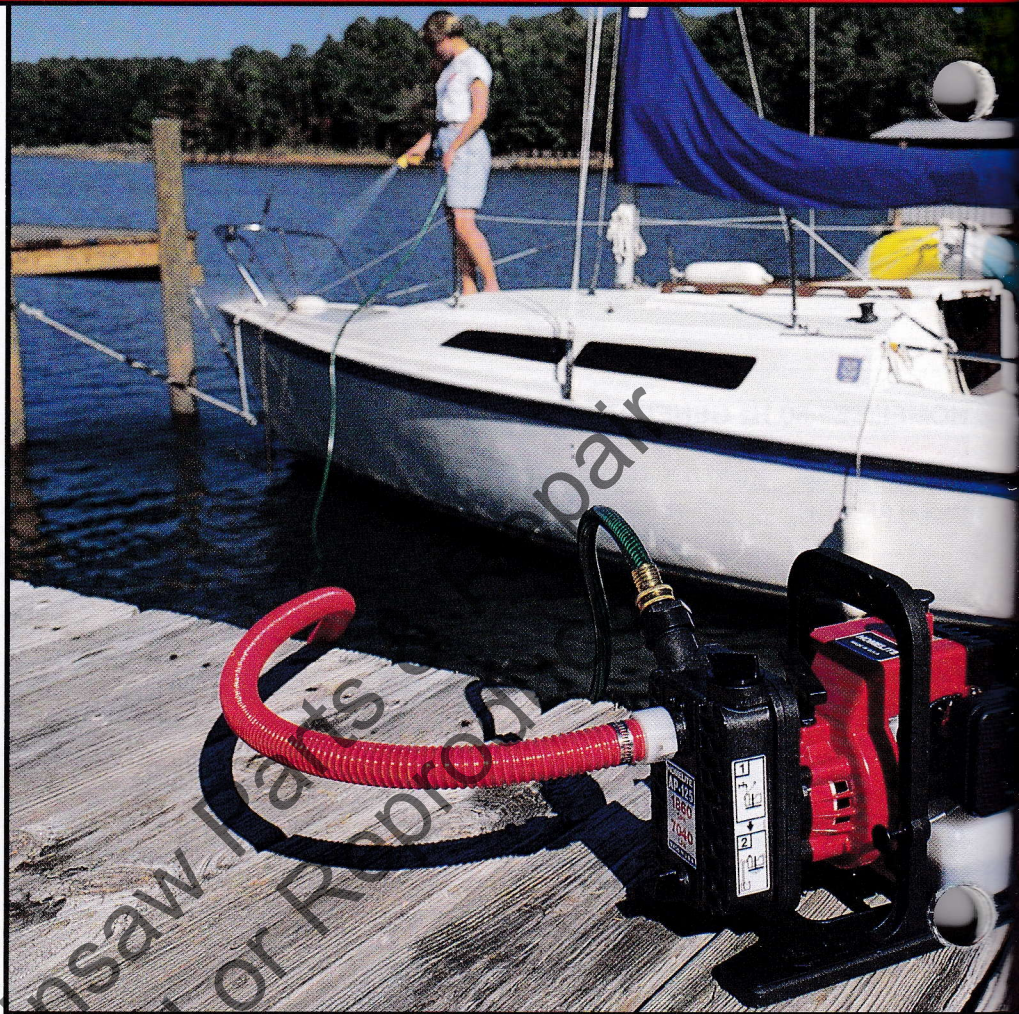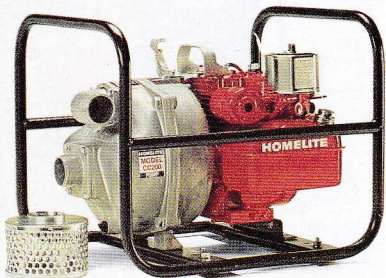

PUMP SPECIFICATIONS

Model	AP-125	CC200	CC205
UT No.	01704	01567	01568
Construction	Thermoplastic	Cast Aluminum	Cast Aluminum
Max. Capacity gph (L/h)	1,860 (7,040)	9,000 (34,000)	10,500 (39,800)
Total Lift ft. (m)	20 (6)	28 (8.5)	28 (8.5)
Total Head ft. (m)	110 (34)	105 (32)	115 (35)
Priming Time sec. @ 25 ft. lift	70	140	110
Length in. (cm)	11¼ (29)	21½ (55)	21½ (55)
Width in. (cm)	10¼ (26)	18½ (47)	18½ (47)
Height in. (cm)	10¾ (27)	17¼ (44)	17¼ (44)
Weight lbs. (kg)	9 (4)	57 (26)	60 (29)
Hose Size in. (cm)	Discharge: 2 (5) Garden Hose Suction: 1 (2.5)	2 (5)	2 (5)

NOTE: Specifications subject to change without notice.

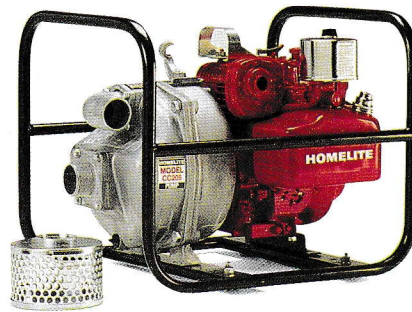

CC205

This handy workhorse can handle up to 10,500 gph (39,700 L/h) and is powered by a muscular 5 HP I/C engine. Its rubber-cushioned feet prevent walking when in operation.

AGRICULTURAL PUMPS

Homelite® agricultural pumps have become very popular with farmers, contractors and home gardeners. Their durability and corrosion resistance lets you pump not only water but also fertilizers and other chemical products. They offer pumping capacities ranging from 8,400 to 9,600 gph (31,800 to 36,300 L/h).




AP220

With a 3 HP engine, this rugged pump moves up to 8,400 gph (31,800 L/h). It's built tough for either clear water or chemical transfer. This unit is equipped with a EPDM seal and rubber components for corrosion resistance and quiet operation.

AP320


A popular model for use where minimal solids are present. This pump features skids, nipples, strainers and abrasive-resistant rubber volute liner for maximum performance. Its 3 HP engine moves up to 8,400 gph (31,800 L/h). Equipped with BUNA-N seal and rubber components, it's corrosion resistant for clear water, fertilizer or herbicide pumping.

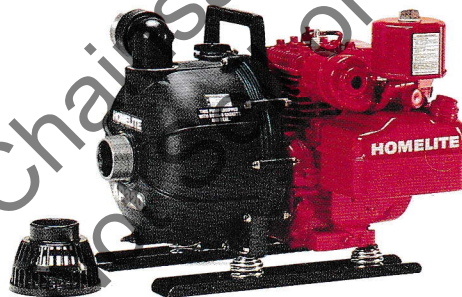

AP520


With a powerful 5 HP engine, this mighty machine moves up to 9,600 gph (36,300 L/h). Its corrosion-resistant construction makes it great for water and farm chemical pumping. Equipped with EPDM seal and rubber components.

AP220	AP320	AP520
01549	01551	01552
Thermo-plastic	Thermo-plastic	Thermo-plastic
8,400 (31,800)	8,400 (31,800)	9,600 (36,300)
28 (8.5)	28 (8.5)	28 (8.5)
110 (33.5)	110 (33.5)	120 (37)
65	65	65
18 (46)	19 (48)	18¾ (47)
14¾ (37)	14¾ (37)	14¾ (37)
12 (31)	14¼ (36)	13½ (34)
32 (14.5)	38 (17)	38 (17)
2 (5)	2 (5)	2 (5)

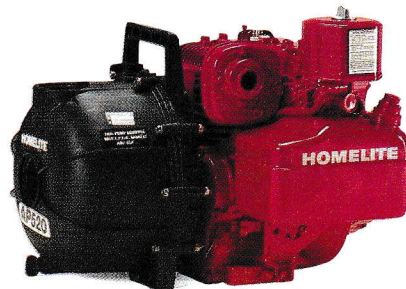

Pump Accessories

PVC suction hose. 1½ in. to 4 in. (3.8 to 10cm) diameter. 10 ft. to 25 ft. (3 to 7.6 m) long.



Fire nozzle with 1½ in. (3.8 cm) NPT threads.



PVC discharge hose. 1½ in. to 4 in. (3.8 to 10 cm) diameter. 25 ft. to 100 ft. (7.6 to 30 m) long.



Welded steel strainer for 1½ in. to 4 in. (3.8 to 10 cm) diameter suction hose.



Puddle sucker removes water from ground level.

AIR COMPRESSORS

AIR POWER... ALL YOU NEED WHEN YOU NEED IT

The "hottest" products for the workshop and work site today are air tools (such as air nailers, see photo). These are the biggest time and labor saving devices on the market today. To satisfy this demand Homelite® has introduced a series of rugged air compressors to power this new generation of air tools.

HOMELITE® AIR COMPRESSORS. HERE'S WHAT THEY CAN DO!

HAC75E

- Inflation Uses
- Air Nailers
- Power Washing
- Spray Painting
- Air Staplers
- Tire Check
- Air Brush

HAC500B

- All Air Tools
- Sandblasting
- Air Sanding
- Power Washing
- Spray Finishing
- Air Drill
- Body Polisher (Automotive)


HAC75E AIR COMPRESSOR ELECTRIC

The HAC75E provides the efficiency of using an electric unit. Its wide-body design provides up to a 30% increase in air output when matched against comparable models. This unit allows you to get more work done in less time and at less cost. **Standard Features:** ■ Lightweight at 62 pounds. ■ Rustproof tanks. ■ Steel ball bearings and solid brass fittings. ■ Teflon impregnated cylinder sleeves. ■ Regulator/gauge kit available.



HAC500B AIR COMPRESSOR GAS-POWERED

This is a heavy-duty unit that can be used for those tough jobs on-site where electric power is not available. Tough jobs that you wouldn't take on before now can be done quickly and efficiently. **Standard Features:** ■ Rugged steel belt guard. ■ Steel ball bearings and solid brass fittings for unsurpassed reliability. ■ Rustproof tanks. ■ Teflon impregnated cylinder sleeves. ■ Tough aluminum pump with cast-iron liner. ■ Front and back handles for lifting or rolling. ■ Regulator/gauge kit available.

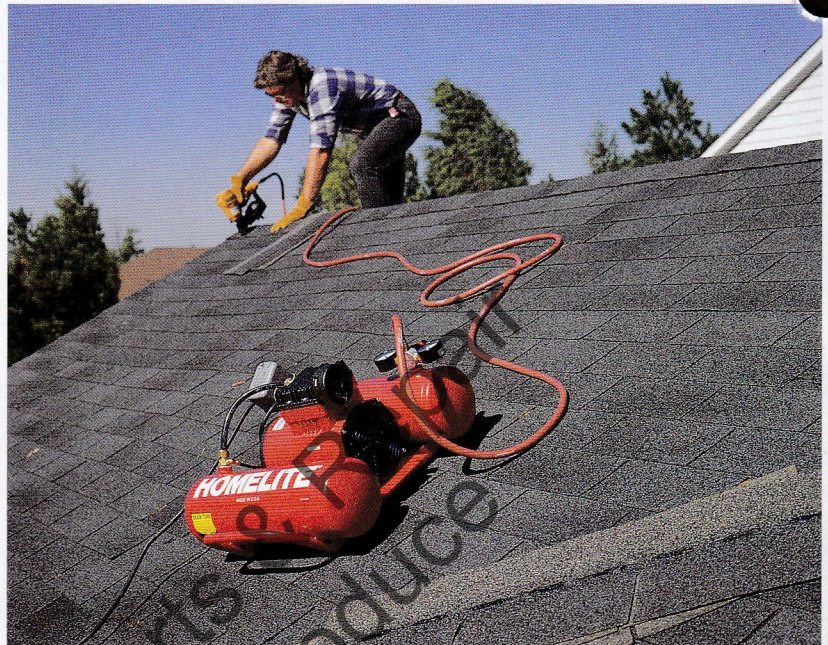

Model	HAC75E
UT No.	06045
Motor	¾ HP electric, capacitor
Air Displacement	4.5 CFM
Air Delivery	2.5 CFM @ 100 PSI
Max. Pressure	125 PSI (8.5 BAR)
Safety Valve Setting	135 PSI (9.1 BAR)
Automatic Control	Pressure switch
Compressor	Oilless, single piston
Tanks	Twin, 2 gal. (7.6 L)
Length	18.9" (48 cm)
Width	25.2" (64 cm)
Height	11.9" (30.2 cm)
Weight	62 lbs. (28.1 kg)

Model	HAC500B
UT No.	06048
Engine	5 HP gasoline, Briggs & Stratton I/C engine
Air Displacement	8.8 CFM
Air Delivery	6.0 CFM @ 100 PSI
Max. Pressure	125 PSI (8.5 BAR)
Safety Valve Setting	135 PSI (9.1 BAR)
Automatic Control	Continuous run unloader valve
Compressor	Oil splash, twin piston, open ball bearing
Tanks	Twin, 3½ gal. (13.2 L)
Length	42.1" (106.9 cm)
Width	18" (45.7 cm)
Height	24.75" (62.9 cm)
Weight	118 lbs. (53.5 kg)

THE MUSCLE TO CLEAR THE WAY THROUGH WINTER'S WORST

In your battle to win the cold war against snow, we give you a choice of powerful, dependable snow throwers. Each of these "cold warriors" features a winterized engine for sure starts and reliable performance, plus plenty of other important features to help you clean your way through the worst that winter can dish out.



SNOW THROWER ACCESSORIES

Description	Model	Part No.
Electric Start Kits	320/420	JA-990486
	624	JA-99250-4
	824	JA-99250-3
	523	JA-99411-7
Tire Chains	624/824	JA-58547
	523	01110-05
Slicer Bar	624/824	JA-58555 (Each)
	523	01110-30 (Pair)

320 & 320E SNOW THROWERS

The 320 features adjustable handles, easy-access controls and a paddle control bar that stops the spinning paddle in seconds without shutting off the engine. Big 7 in. (18 cm) wheels make the unit easy to push and corner. Conversion to electric starting is easy with an optional electric starter kit or the 320E comes with factory installed starter.

SNOW THROWER SPECIFICATIONS

Model	320	320E	420	420E	523	624	824
UT No.	35011-B	35012-B	35020-A	35021-A	35023	35018-A	35019-A
Type	Push	Push	Push	Push	Power-propelled	Power-propelled	Power-propelled
Engine cu. in. (cc)	Homelite® 6.2 (102)	Homelite® 6.2 (102)	Homelite® 6.2 (102)	Homelite® 6.2 (102)	5 HP	6 HP	8 HP
Starter	Recoil	Electric with recoil backup	Recoil	Electric with recoil backup	Recoil (opt. 120v)	Recoil (opt. 120v)	Recoil (opt. 120v)
Clearing Width in. (cm)	20 (50)	20 (50)	20 (50)	20 (50)	23 (58)	24 (61)	24 (61)
Fuel Capacity qts. (L)	2 (1.9)	2 (1.9)	2 (1.9)	2 (1.9)	4 (3.8)	4 (3.8)	4 (3.8)
Speeds (Km/h)	N/A	N/A	N/A	N/A	6 Forward: 2 Reverse	4 Forward: 0.8 (1.3) to 2.5 (4) Reverse: 1.1 (1.8)	4 Forward: 0.8 (1.3) to 2.5 (4) Reverse: 1.1 (1.8)
Discharge Guide Rotation	90°	90°	210°	210°	210°	200°	200°
Ship Wt. lbs. (kg)	62 (28)	67 (30)	76 (35)	79 (36)	200 (91)	238 (108)	248 (113)

NOTE: Specifications subject to change without notice.

420 & 420E SNOW THROWERS

These little giants are lightweight and compact for easy handling and storage. The unique scraper bar and paddle design cleans right down to the pavement to help prevent icing. These lightweight single-stage machines easily clear a 20 in. (50 cm) swath through snow up to 13 in. (33 cm) deep. They can throw snow up to 30 ft. (9 m).

THROWS SNOW UP TO 30 FT.!

624/824 SNOW THROWERS

These Homelite® snow throwers are the heavyweights of our snow thrower line. The muscular 2-stage collector/impeller breaks through high drifts and frozen barricades with a powerful one-two punch, in-line speed control provides four forward speeds and reverse. The Model 624 features a winterized 6 HP Tecumseh engine. The Model 824 offers even more power with an 8 HP engine.


523 SNOW THROWER

This heavy-duty two-stage unit's in-line speed control puts six forward and two reverse speeds at your fingertips. The high-speed self-cleaning four-blade impeller chops up packed snow and gets it out of your path. The handle folds for easy transporting, the scraper bar is adjustable and reversible. The skid can be raised and lowered depending on the surface. For safety, the handle-mounted control levers stop all motion when you take your hands from the machine (A 110V electric start is optional).

FOR THE LOCATION OF YOUR NEAREST HOMELITE SERVICING DEALER IN THE UNITED STATES, PUERTO RICO, AND THE VIRGIN ISLANDS.

CALL: 1-800-242-4672

NOTE: DEALER INFORMATION, TECHNICAL ADVICE AND PRODUCT INFORMATION CAN BE OBTAINED AT THIS NUMBER.

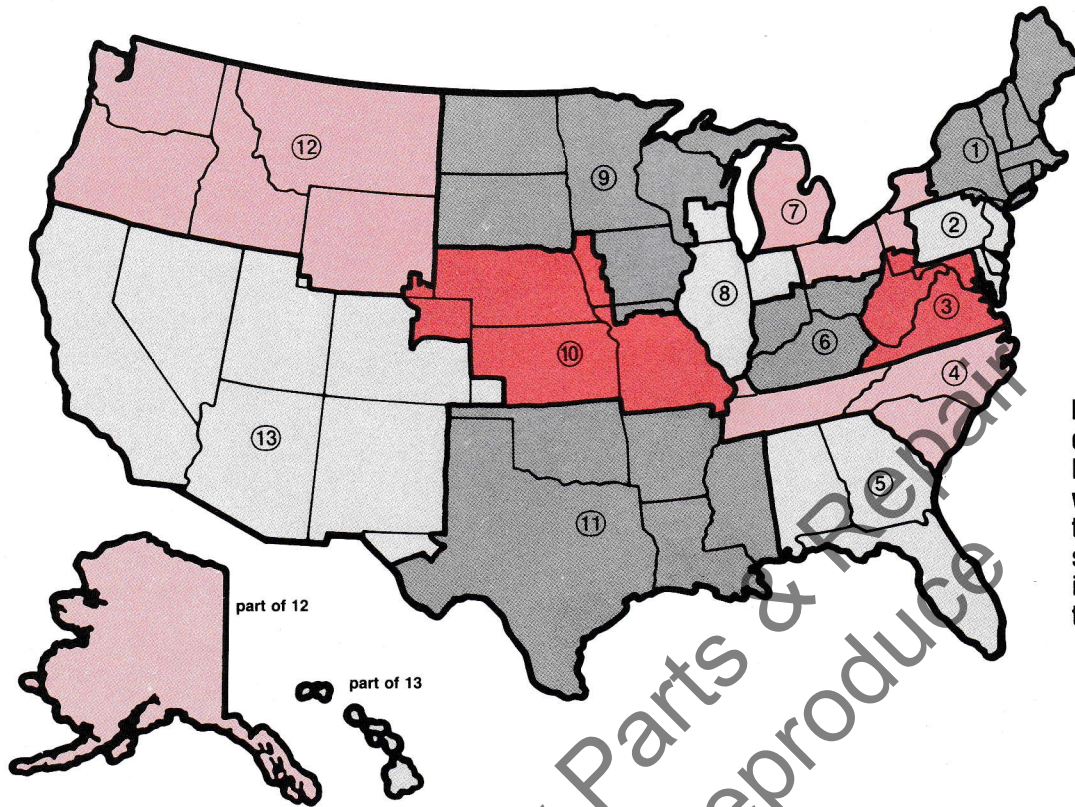

Homelite has district office locations nationwide. Each district's geographic sales territory is indicated on the map.

USA

- 1 NEW JERSEY**
1-80 & New Maple Ave.
Pinebrook, NJ 07058
TEL: 201-575-3500 Sales
- 2 VIRGINIA**
1192 Jefferson Davis Hwy.
Falmouth, VA 22405
TEL: 703-659-6287 Sales
- 3 NORTH CAROLINA**
14401 Carowinds Blvd.
Charlotte, NC 28273
TEL: 704-588-3200 Sales
- 4 GEORGIA**
2108 Moon Station Dr.
Kennesaw, GA 30144
TEL: 404-429-0422 Sales
- 5 OHIO**
9080 Gold Park Drive
Hamilton, OH 45011
TEL: 513-874-4781 Sales
- 6 MICHIGAN**
24404 Catherine Industrial Dr.
Suite 300
Novi, MI 48375
TEL: 313-348-5080 Sales

- 7 ILLINOIS**
1380 Norwood Dr.
Itasca, IL 60143
TEL: 708-773-2200 Sales
- 8 MINNESOTA**
559 Shoreview Park Road
Shoreview, MN 55126
TEL: 612-482-0688 Sales
- 9 KANSAS**
9837 Lackman Rd.
Lenexa, KS 66219
TEL: 913-888-0800 Sales
- 10 TEXAS**
1445 McArthur Drive
Suite 200
Carrollton, TX 75007
TEL: 214-416-9413
- 11 OREGON**
11101 S.W. Greenburg Rd.
P.O. Box 23605
Tigard, OR 97223
TEL: 503-620-0776 Sales
- 12 CALIFORNIA**
917 N. Market Blvd.
Sacramento, CA 95834
TEL: 916-920-1998 Sales

CANADA

- MONTREAL**
Homelite Div. of Textron Canada Ltd.
1850 55th Ave.
Lachine, Quebec
Canada H8T 3J5
Tel: 514-636-5900
Fax: 514-636-9966
- EDMONTON**
16520 111th Ave.
Edmonton, Alberta
Canada T5M 3V8
Tel: 403-489-3395 Sales & Service
Fax: 403-489-3045
- MONCTON**
691 Malenfant Blvd.
Dieppe, New Brunswick
Canada E1A 5T8
Tel: 506-857-4905 Sales & Service
Fax: 506-857-4906
- TORONTO**
595 Canarctic Drive
Downsview, Ontario
Canada M3J 2P9
Tel: 416-667-1689 Sales & Service
Fax: 416-667-1045
- VANCOUVER**
212-214 590 Ebury Place
Annacis Island
Delta, British Columbia
Canada V3M 6K7
Tel: 604-522-6442
Fax: 604-522-3024

HOMELITE OVERSEAS

- HOMELITE TEXTRON HEADQUARTERS FOR EUROPE, AFRICA & MIDDLE EAST**
Haverstraat 24
2153 GB Nieuw Vennepe
The Netherlands
Tel: (31 + 2526) 87342
Fax: (31 + 2526) 87993
Telex: 41192 HLITE NL
- FRANCE**
Homelite Textron Une Division de
Textron Atlantic S.A.R.L.
B.P. 7011
95050 Cergy-Pontoise Cedex,
France
Tel: (33 + 1) 3037-7100
Fax: (33 + 1) 3037-8433
Telex: HOLT FR 608338
- ENGLAND**
Homelite Division of Textron Ltd.
Unit 22 Hither Green Trading Estate
Clevedon, (Nr. Bristol)
Avon BS21 6XU, England
Tel: (44 + 272) 871351
Fax: (44 + 272) 343009
Telex: 449989 HLITE G
- AUSTRALIA**
Homelite Division of Textron Pacific
Limited
22 Terra Cotta Drive
Blackburn, 3130
Victoria, Australia
Tel: (61 + 3) 878-6155
Fax: (61 + 3) 878-8483
Telex: 36217