


CARBURETOR PARTS

Homelite Chain Saw

Assembly Number
A-65578
A-65578-A

WITH GOVERNOR VALVE

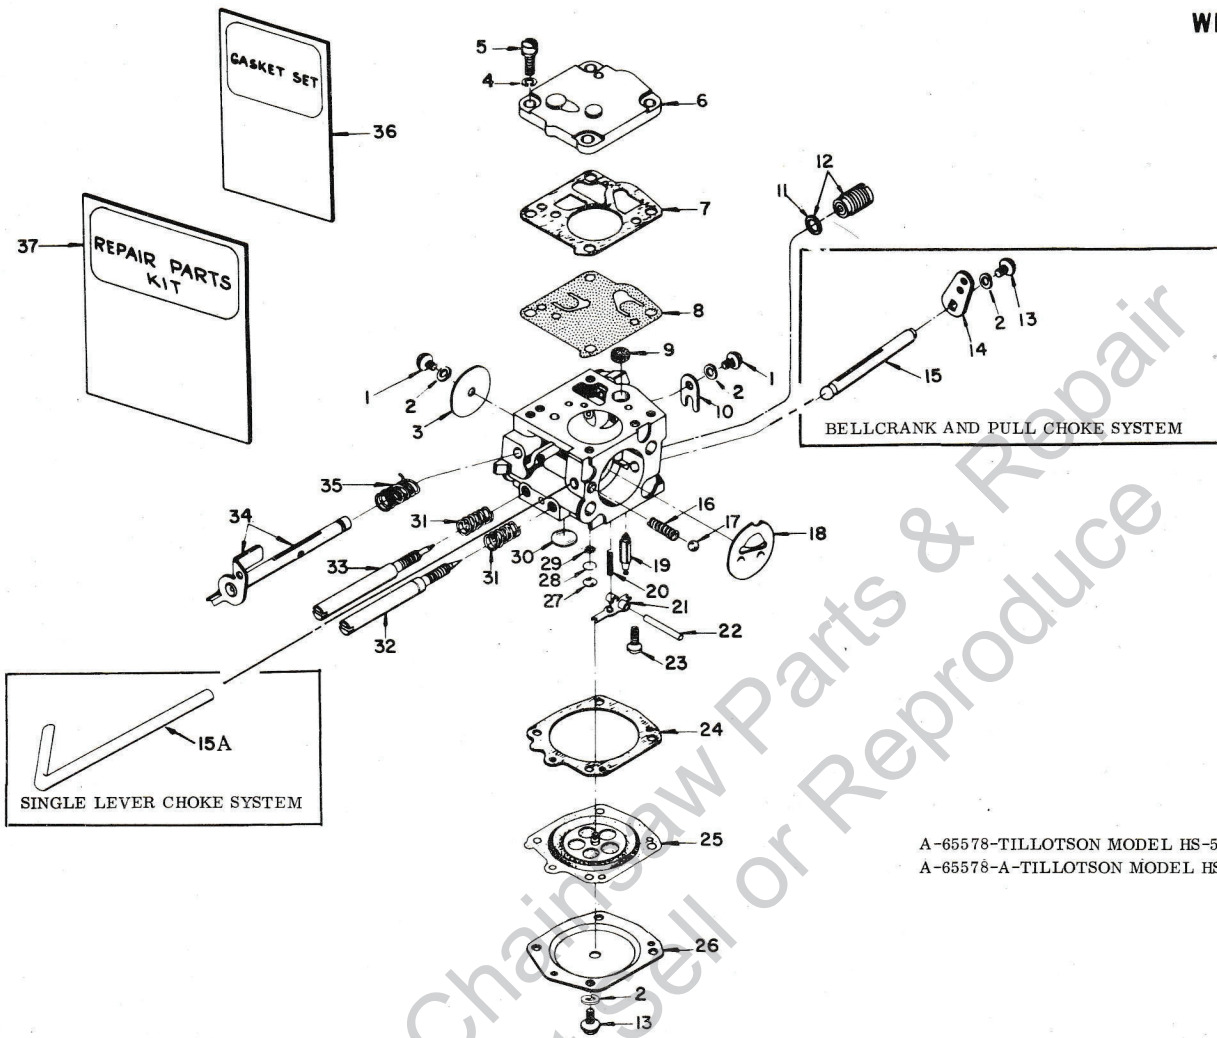

Can be used on:
 XL-700
 XL-800
 XL-800AM
 XL-800EAM
 XL-850
 XL-870
 XL-875
 XL-900E
 XL-900EAM
 XL-901
 XL-903
 XL-903E
 XL-903EAM
 XL-904

A-65578-TILLOTSON MODEL HS-56A
 A-65578-A-TILLOTSON MODEL HS-73A

No.	Part No.	Description	A-65578	A-65578-A	Qty.	No.	Part No.	Description	A-65578	A-65578-A	Qty.
1	80264†	SCREW-rd., 4-40 x 3/16	x	x	2	18	58984	SHUTTER-choke	x	x	1
2	83008-1†	WASHER-lock, #4	x	x	6 or 7	19	59717†	NEEDLE-inlet	x	x	1
	†83008-1†	WASHER-lock, #4				20	55759†	SPRING-control lever	x	x	1
3	25050	SHUTTER-throttle	x	x	1	21	59716†	LEVER-inlet control	x	x	1
4	83024	WASHER-lock, #6	x	x	4	22	58977†	PIN-control lever fulcrum	x	x	1
5	80275	SCREW-fil., 6-32 x 3/8	x	x	4	23	65798†	SCREW-oval, 4-40 x 1/4	x	x	1
6	58975	COVER-fuel pump diaphragm	x	x	1	24	58978	GASKET-main diaphragm	x	x	1
7	58981	GASKET-pump diaphragm	x	x	1	25	58988†	DIA PHRAGM-main control	x	x	1
8	58980-R†	DIAPHRAGM-fuel pump	x	x	1	26	58979	COVER-main diaphragm	x	x	1
9	58974†	SCREEN-fuel inlet	x	x	1	27	58994†	PLUG-extension (small)	x	x	1
10	58982	CLIP-throttle shaft retaining	x	x	1	28	57819	RING-retaining	x	x	1
11	74060	GASKET	x	x	1	29	59500	SCREEN-channel	x	x	1
12	A-65801	VALVE-governor	x	x	1	30	58991†	PLUG-extension (large)	x	x	1
13	80591	SCREW-rd., 4-40 x 1/4	x	x	4 or 5	31	73075†	SPRING-adjustment needle	x	x	2
	†80591	SCREW-rd., 4-40 x 1/4				32	63676†	SCREW-main adjustment	x	x	1
14	†65800	LEVER-choke	x		1	33	63677†	SCREW-idle adjustment	x	x	1
15	†65799†	SHAFT-choke (Bellcrank & Pull Choke System)	x		1	34	A-63345	SHAFT-throttle w/lever	x	x	1
*15A	67032†	SHAFT-choke (Single Lever Choke System)	x		1	35	59460†	SPRING-throttle opening	x	x	1
16	73264	SPRING-choke friction	x	x	1	36	65895†	GASKET SET	x	x	1
17	25527	BALL-choke friction	x	x	1	37	65896	REPAIR KIT	x	x	1

† Not required when using Single Lever Choke System
 * Denotes new part
 † Indicates contents of Repair Kit

HOMELITE

A **Textron** DIVISION

PORT CHESTER, NEW YORK

Part No. 24251

269